

4

3

2




1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS		
F	LNK	DESCRIPTION	DATE	BY
CM	00			
	P2	REVISED PER ECO-11-004820	11MAR11	RK HMR

YES	71.12	[2.800]	28	6-644511-8
YES	68.58	[2.700]	27	6-644511-7
YES	66.04	[2.600]	26	6-644511-6
YES	63.50	[2.500]	25	6-644511-5
YES	60.96	[2.400]	24	6-644511-4
YES	58.42	[2.300]	23	6-644511-3
YES	55.88	[2.200]	22	6-644511-2
YES	53.34	[2.100]	21	6-644511-1
YES	50.80	[2.000]	20	6-644511-0
YES	48.26	[1.900]	19	5-644511-9
YES	45.72	[1.800]	18	5-644511-8
YES	43.18	[1.700]	17	5-644511-7
YES	40.64	[1.600]	16	5-644511-6
YES	38.10	[1.500]	15	5-644511-5
YES	35.56	[1.400]	14	5-644511-4
YES	33.02	[1.300]	13	5-644511-3
YES	30.48	[1.200]	12	5-644511-2
YES	27.94	[1.100]	11	5-644511-1
YES	25.40	[1.000]	10	5-644511-0
YES	22.86	[.900]	9	4-644511-9
YES	20.32	[.800]	8	4-644511-8
YES	17.78	[.700]	7	4-644511-7
YES	15.24	[.600]	6	4-644511-6
YES	12.70	[.500]	5	4-644511-5
YES	10.16	[.400]	4	4-644511-4
YES	7.62	[.300]	3	4-644511-3
YES	5.08	[.200]	2	4-644511-2
YES	12.70	[.500]	5	3-644511-5
NO	71.12	[2.800]	28	2-644511-8
NO	68.58	[2.700]	27	2-644511-7
NO	66.04	[2.600]	26	2-644511-6
NO	63.50	[2.500]	25	2-644511-5
NO	60.96	[2.400]	24	2-644511-4
NO	58.42	[2.300]	23	2-644511-3
NO	55.88	[2.200]	22	2-644511-2
NO	53.34	[2.100]	21	2-644511-1
NO	50.80	[2.000]	20	2-644511-0
NO	48.26	[1.900]	19	1-644511-9
NO	45.72	[1.800]	18	1-644511-8
NO	43.18	[1.700]	17	1-644511-7
NO	40.64	[1.600]	16	1-644511-6
NO	38.10	[1.500]	15	1-644511-5
NO	35.56	[1.400]	14	1-644511-4
NO	33.02	[1.300]	13	1-644511-3
NO	30.48	[1.200]	12	1-644511-2
NO	27.94	[1.100]	11	1-644511-1
NO	25.40	[1.000]	10	1-644511-0
NO	22.86	[.900]	9	644511-9
NO	20.32	[.800]	8	644511-8
NO	17.78	[.700]	7	644511-7
NO	15.24	[.600]	6	644511-6
NO	12.70	[.500]	5	644511-5
NO	10.16	[.400]	4	644511-4
NO	7.62	[.300]	3	644511-3
NO	5.08	[.200]	2	644511-2
LEADFREE	DIM A		NO. OF CIRCUITS	PART NO.

8
SUPERSEDED

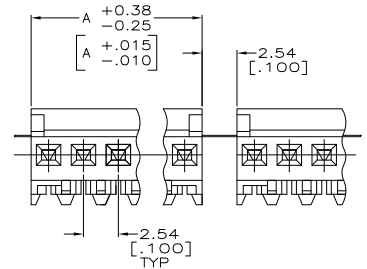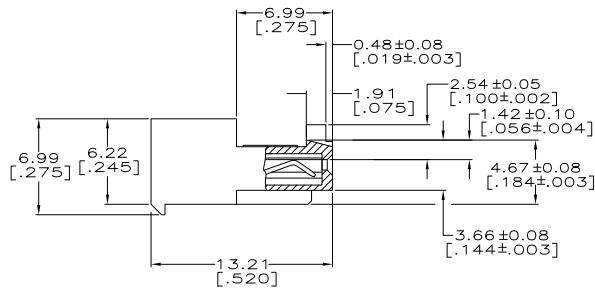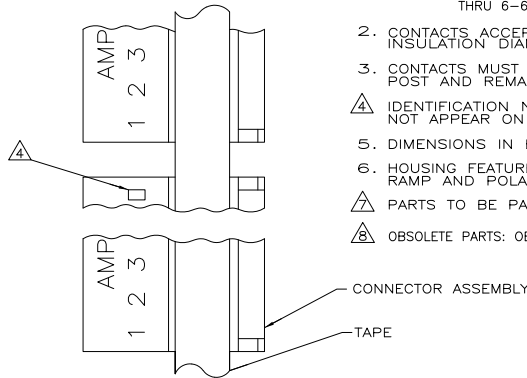

- ⚠ MATERIAL: CONNECTOR - NYLON UL94-V2 (RED)
CONTACTS - 0.30[.012] THICK COPPER ALLOY
BRIGHT TIN-LEAD 0.00203[.000080] MIN. THICK
FOR CONTACTS 644511-2 THRU 2-644511-8.
MATTE WHISKER MITIGATED TIN PLATE 0.00203[.000080] MIN. THICK
OVER NICKEL UNDERPLATE FOR CONTACTS 3-644511-5 AND 4-644511-2
THRU 6-644511-8.
- 2. CONTACTS ACCEPT 22 AWG WIRE WITH 1.52[.060] MAX INSULATION DIAMETER.
- 3. CONTACTS MUST ACCEPT 0.64±0.03[.025] POST AND REMAIN LOCKED IN POSITION.
- ⚠ IDENTIFICATION NUMBER FOR LAST CIRCUIT MAY NOT APPEAR ON ALL ASSEMBLIES.
- 5. DIMENSIONS IN BRACKETS ARE IN INCHES.
- 6. HOUSING FEATURES ARE: CLOSED END WITH LOCKING RAMP AND POLARIZING TAB.
- ⚠ PARTS TO BE PACKAGED ON CORRUGATED PLASTIC REEL.
- ⚠ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PL ± .015 [0.006] 1 PL ± .010 [0.004] 2 PL ± .010 [0.004] 3 PL ± .010 [0.004] 4 PL ± .010 [0.004] ANGLES FINISH	DRN: S. CARPENTER CHK: D. BOSSI APPD: D. BOSSI PRODUCT SPEC: 108-1050 APPLICATION SPEC: 114-1019 WEIGHT	DATE: 08AUG2003 DATE: 08AUG2003 NAME: MTA-100 CONNECTOR ASSEMBLY, 22 AWG, STANDARD, TAPE MOUNTED	TE Connectivity
MATERIAL: ⚠	FINISH: ⚠	CUSTOMER DRAWING	SIZE: A2 CASE CODE: 00779 DRAWING NO: C-644511	RESTRICTED TO: -

SCALE: 5:1 SHEET: 1 of 1 REV: P2

METRIC

644511

B

A

P2

1

1

1

1

1

1

1

1

1

1

1

1

1