

4



3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
F	LNK	DESCRIPTION	DATE	BY	APPD
U2		REVISED PER ECO-11-005027	12MAR11	RIK	HMR

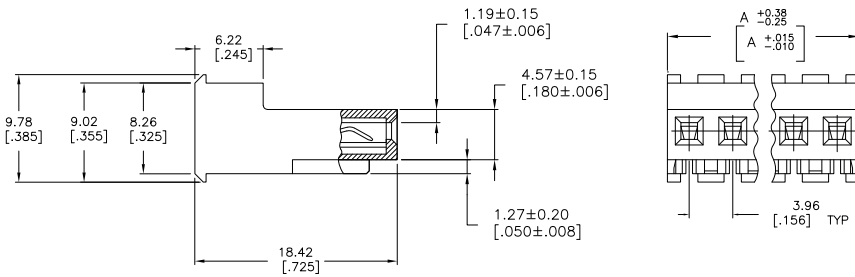

95.10	3.744	24	5-640606-4
91.14	3.588	23	5-640606-3
87.17	3.432	22	5-640606-2
83.21	3.276	21	5-640606-1
79.25	3.120	20	5-640606-0
75.29	2.964	19	4-640606-9
71.32	2.808	18	4-640606-8
67.36	2.652	17	4-640606-7
63.40	2.496	16	4-640606-6
59.44	2.340	15	4-640606-5
55.47	2.184	14	4-640606-4
51.51	2.028	13	4-640606-3
47.55	1.872	12	4-640606-2
43.59	1.716	11	4-640606-1
39.62	1.560	10	4-640606-0
35.66	1.404	9	3-640606-9
31.70	1.248	8	3-640606-8
27.74	1.092	7	3-640606-7
23.77	.936	6	3-640606-6
19.81	.780	5	3-640606-5
15.85	.624	4	3-640606-4
11.89	.468	3	3-640606-3
7.92	.312	2	3-640606-2
95.10	3.744	24	2-640606-4
91.14	3.588	23	2-640606-3
87.17	3.432	22	2-640606-2
83.21	3.276	21	2-640606-1
79.25	3.120	20	2-640606-0
75.29	2.964	19	1-640606-9
71.32	2.808	18	1-640606-8
67.36	2.652	17	1-640606-7
63.40	2.496	16	1-640606-6
59.44	2.340	15	1-640606-5
55.47	2.184	14	1-640606-4
51.51	2.028	13	1-640606-3
47.55	1.872	12	1-640606-2
43.59	1.716	11	1-640606-1
39.62	1.560	10	1-640606-0
35.66	1.404	9	640606-9
31.70	1.248	8	640606-8
27.74	1.092	7	640606-7
23.77	.936	6	640606-6
19.81	.780	5	640606-5
15.85	.624	4	640606-4
11.89	.468	3	640606-3
7.92	.312	2	640606-2
DIM A		NO OF CIRCUITS	PART NO

- △ MATERIAL: CONNECTOR - NYLON UL94V-2 (RED)
CONTACTS - 0.30[.012] THICK COPPER ALLOY (BRIGHT TIN-LEAD 0.00203[.000080] MIN. THICK FOR CONTACTS 640606-2 THRU 2-640606-4) (MATTE WHISKER MITIGATED TIN 0.00203[.000080] MIN THICKNESS OVER NICKEL UNDERPLATE FOR 3-640606-2 THRU 5-640606-4).
- 2 CONTACTS ACCEPT 22 AWG WIRE WITH 2.41[.095] MAX INSULATION DIAMETER.
- 3 CONTACTS MUST ACCEPT 1.14±0.03[.045±.001] SQUARE POST AND REMAIN LOCKED IN POSITION.
- △ 4 IDENTIFICATION NUMBER FOR LAST CIRCUIT MAY NOT APPEAR ON ALL ASSEMBLIES.
- 5 DIMENSIONS IN BRACKETS ARE IN INCHES.
- 6 HOUSING FEATURES ARE: FEED-THRU WITHOUT LOCKING RAMP.
- △ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI



THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED	DRW: S. LEWIS 12FEB91	CHK: R. SWING 12FEB91	DATE: 12FEB91	NAME: D. CLARK
0 PLG ± -	1 PLG ± -	2 PLG ± -	3 PLG ± 0.13 [005]	4 PLG ± -	ANGLES ± -
MATERIAL: △	FINISH: △	APPLICATION SPEC: 108-1051	PRODUCT SPEC: 114-1020	WEIGHT: -	SIZE: A2
CUSTOMER DRAWING			SCALE: 4:1	SHEET: 1 of 1	REV: U2

TE Connectivity
 MTA-156 CONNECTOR ASSEMBLY, 22 AWG, STANDARD