

4

3




2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION.  
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
F	LNK	DESCRIPTION	DATE	BY	APPD
C		ECO-07-012854	05JUN07	KW	DB
C1		REVISED PER ECO-09-023313	09OCT09	KK	AEG

- 1. MATERIAL: CONNECTOR - NYLON UL94V-2 (YELLOW).  
 CONTACTS - 0.30[.012] THICK COPPER ALLOY (BRIGHT-TIN LEAD 0.00203 [0.00080] MIN THK FOR CONTACTS 644462-2 THRU 1-644462-4, MATTE WHISKER MITIGATED TIN 0.00203[0.00080] MIN THICKNESS OVER NICKEL UNDERPLATE FOR 3-644462-2 THRU 4-644462-4)
- 2. CONTACTS ACCEPT 20 AWG WIRE WITH 2.41[.095] MAX INSULATION DIAMETER.
- 3. CONTACTS MUST ACCEPT 1.14±0.03[.045±.001] SQUARE POST AND REMAIN LOCKED IN POSITION.
- 4. IDENTIFICATION NUMBER FOR LAST CIRCUIT MAY NOT APPEAR ON ALL ASSEMBLIES.
- 5. DIMENSIONS IN BRACKETS ARE IN INCHES.
- 6. HOUSING FEATURES ARE: CLOSED END WITHOUT LOCKING RAMP AND WITH POLARIZING TAB.
- 7. OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

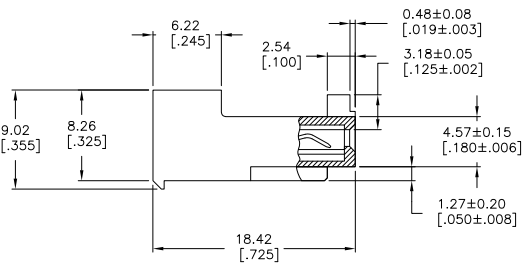

55.47	[2.184]	14	4-644462-4
51.51	[2.028]	13	4-644462-3
47.55	[1.872]	12	4-644462-2
43.59	[1.716]	11	4-644462-1
39.62	[1.560]	10	4-644462-0
35.66	[1.404]	9	3-644462-9
31.70	[1.248]	8	3-644462-8
27.74	[1.092]	7	3-644462-7
23.77	[.936]	6	3-644462-6
19.81	[.780]	5	3-644462-5
15.85	[.624]	4	3-644462-4
11.89	[.468]	3	3-644462-3
7.92	[.312]	2	3-644462-2
55.47	[2.184]	14	1-644462-4
51.51	[2.028]	13	1-644462-3
47.55	[1.872]	12	1-644462-2
43.59	[1.716]	11	1-644462-1
39.62	[1.560]	10	1-644462-0
35.66	[1.404]	9	644462-9
31.70	[1.248]	8	644462-8
27.74	[1.092]	7	644462-7
23.77	[.936]	6	644462-6
19.81	[.780]	5	644462-5
15.85	[.624]	4	644462-4
11.89	[.468]	3	644462-3
7.92	[.312]	2	644462-2
DIM A		NO. OF CIRCUITS	PART NO.

- △ SUPERCEDED 55.47 [2.184] 14 1-644462-4
- △ SUPERCEDED 51.51 [2.028] 13 1-644462-3
- △ SUPERCEDED 47.55 [1.872] 12 1-644462-2
- △ SUPERCEDED 43.59 [1.716] 11 1-644462-1
- △ SUPERCEDED 39.62 [1.560] 10 1-644462-0
- △ SUPERCEDED 35.66 [1.404] 9 644462-9
- △ SUPERCEDED 31.70 [1.248] 8 644462-8
- △ SUPERCEDED 27.74 [1.092] 7 644462-7
- △ SUPERCEDED 23.77 [.936] 6 644462-6
- △ SUPERCEDED 19.81 [.780] 5 644462-5
- △ SUPERCEDED 15.85 [.624] 4 644462-4
- △ SUPERCEDED 11.89 [.468] 3 644462-3
- △ SUPERCEDED 7.92 [.312] 2 644462-2

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED	DRN: S. LEWIS 12FE891	CHK: S. LEWIS 12FE891	DATE: 12/28/91	BY: SWING	20FE891	NAME: D.R. CLARK	TYCO ELECTRONICS Tyco Electronics Corporation Harrisburg, Pa 17105-3608
0 PLG ± .01	0 PLG ± .01	PRODUCT SPEC: 108-1051	APPLICATION SPEC: 114-1020	WEIGHT: -	SIZE: A2	DATE CODE: 00779	DRAWING NO: C-644462	RESTRICTED TO: -
MATERIAL: △	FINISH: △	CUSTOMER DRAWING			SCALE: 4:1	SHEET: 1 OF 1	REV: C1	

