THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
DIFFUSION RESTREINTE. LIBRE A LA DIFFUSION
© COPYRIGHT 20 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED. TOUS DROITS RESERVES

FILS ADMISSIBLES (ACCEPTABLES WIRES)	
JAUGE (AWG) SECTION / 7 BRINS (7 STRANDS)	24 0.22mm²
ISOLANT: ØMAX / MATIERE (INSUL.: Ø MAX / MAT'L)	Ø1.2 / PVC

LOC	DIST
F	7

REVISIONS

P	LTR	DESCRIPTION MODIFICATIONS	DATE	DWN DESS.	APVD APP.
	E	LOGO TYCO ETAIT AMP. CLARIFICATION.	13MAR2001	GR	YP







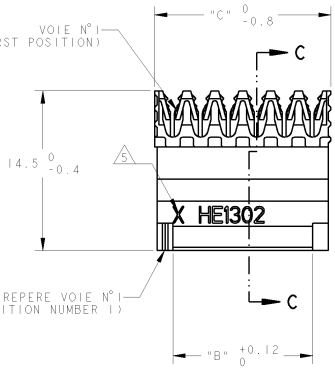

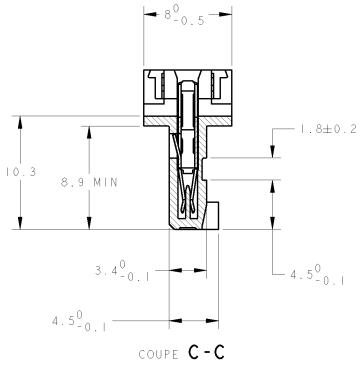

COUPE C-C

OBSOLETE	2	54.36	50.28	25	0-281709-0	0-144273-0
OBSOLETE	3	51.75	47.63	24	0-281709-1	0-144273-1
OBSOLETE	4	49.22	45.08	23	0-281709-2	0-144273-2
OBSOLETE	5	46.60	42.54	22	0-281709-3	0-144273-3
OBSOLETE	6	44.13	40.09	21	0-281709-4	0-144273-4
OBSOLETE	7	41.53	37.59	20	0-281709-5	0-144273-5
OBSOLETE	8	39.06	35.05	19	0-281709-6	0-144273-6
	12	46.52	43.18	18	1-281709-8 *	1-144273-8 *
OBSOLETE	13	43.98	40.64	17	1-281709-7	1-144273-7
OBSOLETE	14	41.44	38.10	16	1-281709-6	1-144273-6
	15	38.90	35.56	15	1-281709-5 *	1-144273-5 *
OBSOLETE	16	36.36	33.02	14	1-281709-4	1-144273-4
OBSOLETE	17	33.82	30.48	13	1-281709-3	1-144273-3
	18	31.28	27.94	12	1-281709-2 *	1-144273-2 *
OBSOLETE	19	28.74	25.40	11	1-281709-1	1-144273-1
	20	26.20	22.86	10	1-281709-0 *	1-144273-0 *
OBSOLETE	24	23.66	20.32	9	0-281709-9	0-144273-9
	25	21.12	17.78	8	0-281709-8 *	0-144273-8 *
	30	18.58	15.24	7	0-281709-7	0-144273-7
	35	16.04	12.70	6	0-281709-6 *	0-144273-6 *
	40	13.50	10.16	5	0-281709-5 *	0-144273-5 *
	50	10.96	7.62	4	0-281709-4 *	0-144273-4 *
	70	8.42	5.08	3	0-281709-3 *	0-144273-3 *
	100	5.88	2.54	2	0-281709-2	0-144273-2
	QUANT/ TUBE	C	A,B	Nb DE POS	4	VRAC (L.P.)
		DIMENSIONS			REFERENCES (PART No)	

1 CES CONNECTEURS SONT PREVUS POUR ETRE ACCOUPLES AVEC LES EMBASES 'HE1302' SIMPLE RANGEE
(THESE CONNECTORS ARE DESIGNED TO BE MATED WITH 'HE1302' HEADERS SINGLE ROW)
-

2 LES REFERENCES SUIVIES D'UN ' * ' SONT LES VERSIONS NORMALISEES SELON LA 'CEI 603-8'
(THE PART-No FOLLOWED BY ' * ' ARE COVERED BY THE INTERNATIONAL STANDARD 'IEC 603-8')

⚠3 REVETEMENT DES CONTACTS: 0.4µm OR DANS LA ZONE DE CONTACT, ETAIN SUR SORTIE CAD, SOUS-COUCHE NICKEL
(CONTACTS PLATING: 0.4µm GOLD ON CONTACT AREA, TIN ON I.D. BARREL AREA NICKEL UNDER-PLATING)

⚠4 CONNECTEURS CONDITIONNES SOUS TUBE PVC
(THESE CONNECTORS ARE PACKAGED IN TUBE)

⚠5 ' X ' EST REMPLACE PAR LE DEUXIEME CHIFFRE DES JAUGES AWG
(' X ' REPLACED BY THE SECOND DIGIT OF AWG AS DEFINED IN TABLE)

⚠6 MATERIAUX - BOITIER: PBT UL 94V0 - CONTACTS: BRONZE PHOSPHOREUX
(MATERIALS - CASE: PBT UL 94V0 - CONTACTS: PHOSPHOR BRONZE)

THIS DRAWING IS A CONFIDENTIAL DOCUMENT OF TYCO ELECTRONICS CORPORATION ITS IS SHARED ONLY WITH THE CONTRACTING ORGANIZATION AND SHALL NOT BE CONTACTED FOR THE LATEST REVISION
CE PLAN EST LA PROPRIETE EXCLUSIVE DE TYCO ELECTRONICS CORPORATION ET EST PARTAGE AVEC L'ORGANISME CONTRACTANT. IL NE DOIT PAS ETRE REPRODUIT SANS L'AUTORISATION TERRAINE D'AMP DE FRANCE POUR OBTENIR LA DERNIERE REVISION.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED: TOLERANCES NON SPECIFIEES (EXPRIMEES EN NOMBRE DE DECIMALES)
0 PLC/DEC: ±
1 PLC/DEC: ±0.3
2 PLC/DEC: ±
3 PLC/DEC: ±
4 PLC/DEC: ±
ANGLES: ±5°

MATERIAL/MATIERE: ⚠6
FINISH/FINITION: ⚠3

DWN/DESSINE	17NOV2000 C. COMBEDOUZON
CHK/VERIFIE	17NOV2000 L. CORRIOU
APVD/APROUVE	17NOV2000 J. PETIONIN
PRODUCT SPEC SPEC. PRODUIT	108-15053
APPLICATION SPEC SPEC. APPLICATION	114-15030
WEIGHT MASSE APPROX.	-

CUSTOMER DRAWING /PLAN CLIENT

AMP DE FRANCE
95301 PONTOISE

NAME TITRE: HE1302 PLUG, 90deg IDC SINGLE ROW

SIZE FORMAT	CAGE CODE	DRAWING NO No. PLAN	RESTRICTED TO RESERVE A
A2	00779	C-281709	-

UNIDIMENSIONNEL POUR REFERENCE | SCALE ECHELLE 4:1 | SHEET FEUILLE 1 | OF NB 1 | REV E

AMP 1471-9 REV 31MAR2000

Downloaded from Elcodis.com electronic components distributor