



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
AD	00	P	LTR	DESCRIPTION	DATE	BY	APPD
		J	EC	OG3C 0760 04	24DEC04	BSV	JG
		J1		REVISED PER ECO-09-020774	26AUG09	KK	AEG

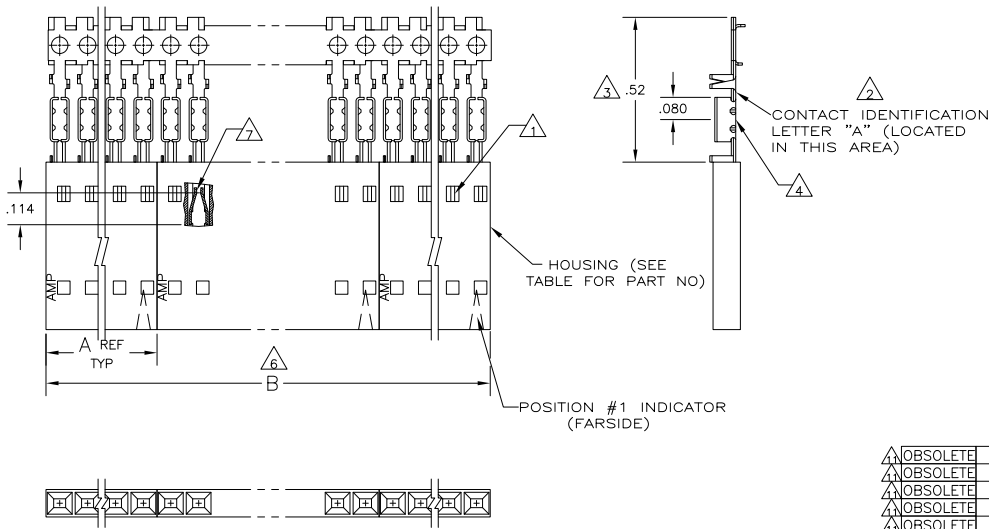

- 1 CONTACTS ARE LATCHED INTO THE PRELOAD WINDOWS
- 2 USE WITH #26-#30 AWG WIRE SIZE, .054/.030 INSULATION DIAMETER, .015 MAXIMUM INSULATION THICKNESS
- 3 THE DIMENSION APPLIES WITH THE FORWARD PRELOAD STOP IN CONTACT WITH THE HOUSING SURFACE
- 4 POINT OF MEASUREMENT FOR PLATING THICKNESS
- 5. FOR INDIVIDUAL ASSEMBLIES SEE PART NUMBER 103685
- 6 ASSEMBLIES ARE JOINED BY THE CARRIER STRIP. ORDER QUANTITY REFLECTS TOTAL NUMBER OF INDIVIDUAL ASSEMBLIES REQUIRED. SEE TABLE FOR NUMBER OF ASSEMBLIES PER STRIP.
- 7 POINT OF MEASUREMENT FOR PLATING THICKNESS (INSIDE BEAMS)
- 8 MAXIMUM ALLOWABLE BOW OF ASSEMBLY NOT TO EXCEED .055.
- 9 CONTACTS: .000100-.000200 BRIGHT TIN-LEAD OVER .000050 NICKEL
- 10 CONTACTS: .000100-.000200 MATTE TIN OVER .000050 NICKEL
- 11 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

11	OBSOLETE	2	2.40	1.198	1-103688-1	12	6-103977-1
12	OBSOLETE	2	2.20	1.098	1-103688-0	11	6-103977-0
13	OBSOLETE	2	2.00	.998	103688-9	10	5-103977-9
14	OBSOLETE	2	1.80	.898	103688-8	9	5-103977-8
15	OBSOLETE	2	1.60	.798	103688-7	8	5-103977-7
16	OBSOLETE	2	1.40	.698	103688-6	7	5-103977-6
17		4	2.39	.598	103688-5	6	5-103977-5
18		4	1.99	.498	103688-4	5	5-103977-4
19		5	1.99	.398	103688-3	4	5-103977-3
20		8	2.40	.298	103688-2	3	5-103977-2
21		10	2.00	.198	103688-1	2	5-103977-1
22	OBSOLETE	2	2.40	1.198	1-103688-1	12	1-103977-1
23	OBSOLETE	2	2.20	1.098	1-103688-0	11	1-103977-0
24	OBSOLETE	2	2.00	.998	103688-9	10	103977-9
25	OBSOLETE	2	1.80	.898	103688-8	9	103977-8
26	OBSOLETE	2	1.60	.798	103688-7	8	103977-7
27	OBSOLETE	2	1.40	.698	103688-6	7	103977-6
28		4	2.39	.598	103688-5	6	103977-5
29		4	1.99	.498	103688-4	5	103977-4
30		5	1.99	.398	103688-3	4	103977-3
31		8	2.40	.298	103688-2	3	103977-2
32		10	2.00	.198	103688-1	2	103977-1

THIS DRAWING IS A CONTROLLED DOCUMENT. **MIN** L. MAYER 05 NOV 1986 **TYCO** Tyco Electronics Corporation  
 HARRISBURG, PA 17105-3608

OK P. C. DELONG 11-12-86  
 J. SCHEIFFER 11-13-86

DIMENSIONS: INCHES  
 0 PLG ± .010  
 1 PLG ± .015  
 2 PLG ± .020  
 3 PLG ± .025  
 4 PLG ± .030  
 ANGLES ± .5°

MATERIAL: HOUSING: BRASS  
 CONTACTS: COPPER  
 CONTACTS: COPPER  
 CONTACTS: COPPER

FINISH: SEE TABLE

PRODUCT SPEC: 108-25034  
 APPLICATION SPEC: 114-25026  
 HEIGHT: -

RCPT ASSY, AMPMODU MTE, SINGLE ROW, .100 C/L  
 FOR #26-#30 AWG WIRE SIZE, STRIP FORM

SIZE: A2 00779 C=103977  
 RESTRICTED TO: -

CUSTOMER DRAWING SCALE: 4:1 SHEET: 1 OF 1 REV: J1

AMP 1471-9 REV 31MM2000