

4


3

2


1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	REV	DATE	DESCRIPTION	BY	APP'D
AD	00				
	H	EC 0630 0759 04		24JMS	BSV JLG
	H1	REVISED PER ECO-09-020689		02SEP09	KK AEG

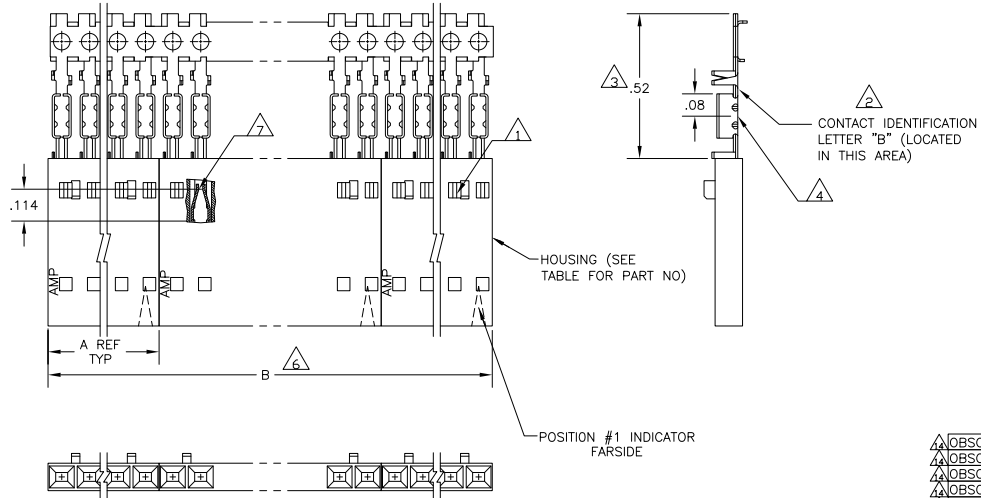

- 1 CONTACTS ARE LATCHED INTO THE PRELOAD WINDOWS
- 2 USE WITH #22-#26 AWG WIRE SIZE, .054/.030 INSULATION DIAMETER, .015 MAXIMUM INSULATION THICKNESS
- 3 THE DIMENSION APPLIES WITH THE FORWARD PRELOAD STOP IN CONTACT WITH THE HOUSING SURFACE
- 4 POINT OF MEASUREMENT FOR PLATING THICKNESS
- 5 FOR INDIVIDUAL ASSEMBLIES SEE PART NUMBER 103651
- 6 ASSEMBLIES ARE JOINED BY THE CARRIER STRIP. ORDER QUANTITY REFLECTS TOTAL NUMBER OF INDIVIDUAL ASSEMBLIES REQUIRED. SEE TABLE FOR NUMBER OF ASSEMBLIES PER STRIP.
- 7 POINT OF MEASUREMENT FOR PLATING THICKNESS (INSIDE BEAMS)
- 8 MAXIMUM ALLOWABLE BOW OF ASSEMBLY NOT TO EXCEED .055.
- 9 .000015 GOLD IN THE CONTACT AREA, .000050-.000100 BRIGHT TIN-LEAD IN THE TERMINATION AREA, ALL OVER .000050 NICKEL.
- 10 .000015 GOLD IN THE CONTACT AREA, .000050-.000100 BRIGHT TIN IN THE TERMINATION AREA, ALL OVER .000050 NICKEL.
- 11 PRELIMINARY PART - NOT RELEASED FOR PRODUCTION.
- 12 HOUSING MATERIAL: FLAME RETARDANT THERMOPLASTIC, COLOR BLACK.
- 13 .000015 GOLD IN THE CONTACT AREA, .000050-.000100 MATTE TIN IN THE TERMINATION AREA, ALL OVER .000050 NICKEL.
- 14 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

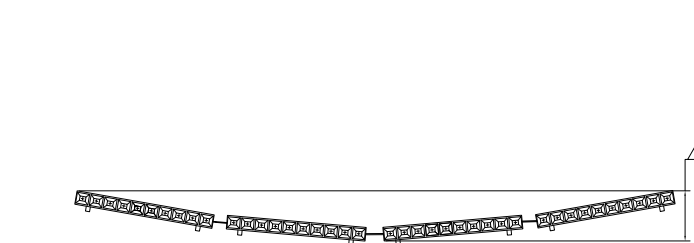

EXAMPLE: STRIP ASSEMBLY SCALE: 2:1

PLATING	QTY	W	L	T	HOUSING PART NUMBER	NO OF POSN	ASSEMBLY PART NUMBER ON STRIP
△	2	2.40	1.198		1-103648-1	12	6-103969-1
△	2	2.20	1.098		1-103648-0	11	6-103969-0
△	2	2.00	.998		103648-9	10	5-103969-9
△	2	1.80	.898		103648-8	9	5-103969-8
△	2	1.60	.798		103648-7	8	5-103969-7
△	2	1.40	.698		103648-6	7	5-103969-6
△	4	2.39	.598		103648-5	6	5-103969-5
△	4	1.99	.498		103648-4	5	5-103969-4
△	5	1.99	.398		103648-3	4	5-103969-3
△	8	2.40	.298		103648-2	3	5-103969-2
△	10	2.00	.198		103648-1	2	5-103969-1
△	2	2.00	.998		103648-9	10	1-103969-2
△	2	2.40	1.198		1-103648-1	12	1-103969-1
△	2	2.20	1.098		1-103648-0	11	1-103969-0
△	2	2.00	.998		103648-9	10	103969-9
△	2	1.80	.898		103648-8	9	103969-8
△	2	1.60	.798		103648-7	8	103969-7
△	2	1.40	.698		103648-6	7	103969-6
△	4	2.39	.598		103648-5	6	103969-5
△	4	1.99	.498		103648-4	5	103969-4
△	5	1.99	.398		103648-3	4	103969-3
△	8	2.40	.298		103648-2	3	103969-2
△	10	2.00	.198		103648-1	2	103969-1

THIS DRAWING IS A CONTROLLED DOCUMENT.

INCHES

DATE: 05 NOV 1986

BY: L. MAYER

CHK: P. C. DEJONG

APP'D: J. SCHEFFER

PRODUCT SPEC: 108-25034

APPLICATION SPEC: 114-25026

SIZE: A2

DATE CODE: 00779

REV: H1

TYCO ELECTRONICS CORPORATION, Harrisburg, Pa 17105-3608

RCPT ASSY, AMPMODU MTE, SINGLE ROW, .100 C/L, WITH GUIDE RIBS, FOR #22-#26 AWG WIRE SIZE, STRIP FORM

CUSTOMER DRAWING

SCALE: 1:1

SHEET: 1 OF 1

103969

A