

4



3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION. BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
AD	00	P	LTR	DESCRIPTION	DATE	BY	APPD
		K	EC	OG3C 0760 04	23DEC04	BSV	-
		K1		REVISED PER ECO-09-020774	26AUG09	KK	AEG

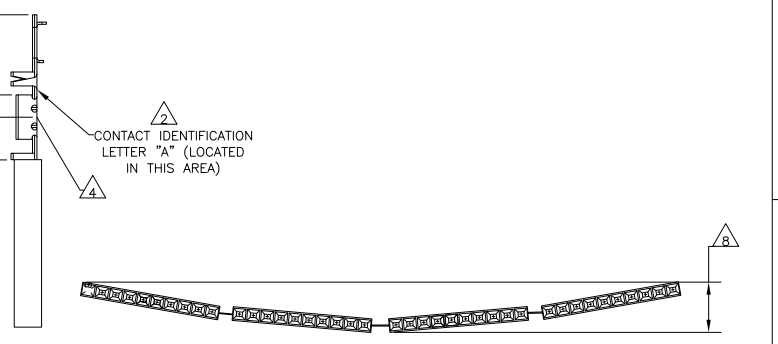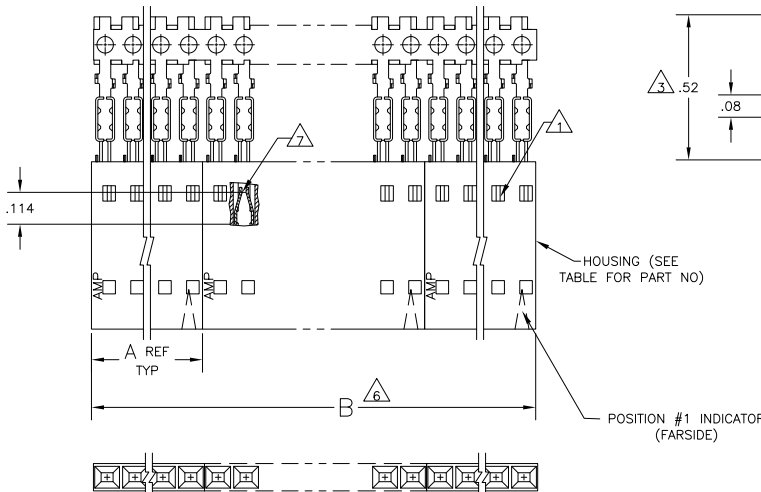

EXAMPLE STRIP ASSEMBLY SCALE 2:1

- 1 CONTACTS ARE LATCHED INTO THE PRELOAD WINDOWS
- 2 USE WITH #26-#30 AWG WIRE SIZE, .054/.030 INSULATION DIAMETER, .015 MAXIMUM INSULATION THICKNESS
- 3 THE DIMENSION APPLIES WITH THE FORWARD PRELOAD STOP IN CONTACT WITH THE HOUSING SURFACE
- 4 POINT OF MEASUREMENT FOR PLATING THICKNESS
- 5 FOR INDIVIDUAL ASSEMBLIES SEE PART NUMBER 103684
- 6 ASSEMBLIES ARE JOINED BY THE CARRIER STRIP. ORDER QUANTITY REFLECTS TOTAL NUMBER OF INDIVIDUAL ASSEMBLIES REQUIRED. SEE TABLE FOR NUMBER OF ASSEMBLIES PER STRIP.
- 7 POINT OF MEASUREMENT FOR PLATING THICKNESS (INSIDE BEAMS)
- 8 MAXIMUM ALLOWABLE BOW OF ASSEMBLY NOT TO EXCEED .055.
- 9 CONTACTS: .000015 GOLD IN THE CONTACT AREA, .000050-.000100 BRIGHT TIN-LEAD ON THE TERMINATION AREA, ALL OVER .000050 NICKEL.
- 10 CONTACTS: .000015 GOLD IN THE CONTACT AREA, .000050-.000100 BRIGHT TIN ON THE TERMINATION AREA, ALL OVER .000050 NICKEL.
- 11 PRELIMINARY PART-NOT RELEASED FOR PRODUCTION.
- 12 HOUSING MATERIAL: FLAME RETARDANT THERMOPLASTIC, COLOR BLACK.
- 13 CONTACTS: .000015 GOLD IN THE CONTACT AREA, .000050-.000100 MATTE TIN ON THE TERMINATION AREA, ALL OVER .000050 NICKEL.
- 14 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

△ OBSOLETE	△	2	2.40	1.198	1-103688-1	12	6-103978-1
△ OBSOLETE	△	2	2.20	1.098	1-103688-0	11	6-103978-0
△ OBSOLETE	△	2	2.00	.998	103688-9	10	5-103978-9
△ OBSOLETE	△	2	1.80	.898	103688-8	9	5-103978-8
△ OBSOLETE	△	2	1.60	.798	103688-7	8	5-103978-7
△ OBSOLETE	△	2	1.40	.698	103688-6	7	5-103978-6
△ OBSOLETE	△	4	2.39	.598	103688-5	6	5-103978-5
△	△	4	1.99	.498	103688-4	5	5-103978-4
△	△	5	1.99	.398	103688-3	4	5-103978-3
△	△	8	2.40	.298	103688-2	3	5-103978-2
△	△	10	2.00	.198	103688-1	2	5-103978-1
△	△	5	1.99	.398	103688-3	4	1-103978-2
△ OBSOLETE	△	2	2.40	1.198	1-103688-1	12	1-103978-1
△ OBSOLETE	△	2	2.20	1.098	1-103688-0	11	1-103978-0
△ OBSOLETE	△	2	2.00	.998	103688-9	10	103978-9
△ OBSOLETE	△	2	1.80	.898	103688-8	9	103978-8
△	△	2	1.60	.798	103688-7	8	103978-7
△	△	2	1.40	.698	103688-6	7	103978-6
△	△	4	2.39	.598	103688-5	6	103978-5
△	△	4	1.99	.498	103688-4	5	103978-4
△	△	5	1.99	.398	103688-3	4	103978-3
△	△	8	2.40	.298	103688-2	3	103978-2
△	△	10	2.00	.198	103688-1	2	103978-1

THIS DRAWING IS A CONTROLLED DOCUMENT.

INCHES DIMENSIONS: 0.0005 INCHES OTHER DIMENSIONS UNLESS SPECIFIED

0.0005 INCHES DIMENSIONS: 0.0005 INCHES OTHER DIMENSIONS UNLESS SPECIFIED

DATE: 05 NOV 1986
 BY: L. MAYER
 CHECKED: 11-12-86
 DATE: 11-13-86
 BY: P. C. DEJONG

TYCO ELECTRONICS CORPORATION
 Harrisburg, Pa 17105-3608

RCPT ASSY, AMPMODU MTE, SINGLE ROW, .100 C/L FOR #26-#30 AWG WIRE SIZE, STRIP FORM

SIZE: 108-25034
 APPLICATION SPEC: 114-25026
 WEIGHT: -
 FINISH: SEE TABLE

RESTRICTED TO: A2 00779 C=103978

CUSTOMER DRAWING SCALE: 4:1 SHEET: 1 OF 1 REV: K1

103978

A