

4


3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS		
P	LTR	DESCRIPTION	DATE	BY
J	EC	063C 0766 04	28DEC04	BSV
J1	REVISED PER ECO-09-020689		29AUG09	KK AEG

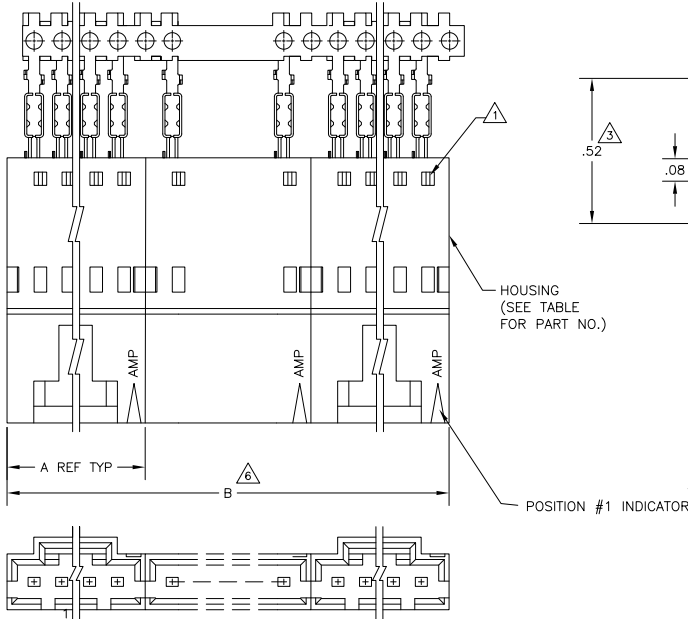

△ OBSOLETE	△	2	2.59	1.295	1-103653-1	12	6-103947-1
△ OBSOLETE	△	2	2.39	1.195	1-103653-0	11	6-103947-0
△ OBSOLETE	△	2	2.19	1.095	103653-9	10	5-103947-9
△ OBSOLETE	△	2	1.99	.995	103653-8	9	5-103947-8
△	△	2	1.79	.895	103653-7	8	5-103947-7
△ OBSOLETE	△	3	2.39	.795	103653-6	7	5-103947-6
△ OBSOLETE	△	2	1.39	.695	103653-4	6	5-103947-5
△ OBSOLETE	△	4	2.38	.595	103653-5	5	5-103947-4
△	△	4	1.98	.495	103653-3	4	5-103947-3
△	△	5	1.98	.395	103653-2	3	5-103947-2
△	△	8	2.36	.295	103653-1	2	5-103947-1
△ OBSOLETE	△	2	2.59	1.295	1-103653-1	12	1-103947-1
△ OBSOLETE	△	2	2.39	1.195	1-103653-0	11	1-103947-0
△ OBSOLETE	△	2	2.19	1.095	103653-9	10	103947-9
△ OBSOLETE	△	2	1.99	.995	103653-8	9	103947-8
△ SUPERSEDED	△	2	1.79	.895	103653-7	8	103947-7
△ OBSOLETE	△	3	2.39	.795	103653-6	7	103947-6
△	△	2	1.39	.695	103653-4	6	103947-5
△ OBSOLETE	△	4	2.38	.595	103653-5	5	103947-4
△	△	4	1.98	.495	103653-3	4	103947-3
△	△	5	1.98	.395	103653-2	3	103947-2
△	△	8	2.36	.295	103653-1	2	103947-1
PLATING	△	B	A		HOUSING PART NUMBER	NO OF POSN	ASSEMBLY PART NUMBER ON STRIP

- △ CONTACTS ARE LATCHED INTO THE PRELOAD WINDOWS
- △ USE WITH #26-#30 AWG WIRE SIZE, .054/.030 INSULATION DIAMETER, .015 MAXIMUM INSULATION THICKNESS
- △ THE DIMENSION APPLIES WITH THE FORWARD PRELOAD STOP IN CONTACT WITH THE HOUSING SURFACE
- △ POINT OF MEASUREMENT FOR PLATING THICKNESS
- 5 FOR INDIVIDUAL ASSEMBLIES SEE PART NUMBER 103659
- △ ASSEMBLIES ARE JOINED BY THE CARRIER STRIP. ORDER QUANTITY REFLECTS TOTAL NUMBER OF INDIVIDUAL ASSEMBLIES REQUIRED. SEE TABLE FOR NUMBER OF ASSEMBLIES PER STRIP.
- △ MATERIAL- HOUSING: FLAME RETARDANT THERMOPLASTIC, COLOR: BLACK  
PINS: PHOS. BRONZE
- △ FINISH- PINS: .000100-.000200 BRIGHT TIN-LEAD OVER .000050 NICKEL.
- △ FINISH- PINS: .000100-.000200 MATTE TIN OVER .000050 NICKEL.
- △ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

THIS DRAWING IS A CONTROLLED DOCUMENT.

DESIGNED BY: R. BROWN	DATE: 26JUL00	Tyco Electronics Corporation Harrisburg, Pa 17105-3608
CHECKED BY: K. WRIGHT	DATE: 26JUL00	
DRAWN BY: K. WRIGHT	DATE: 26JUL00	SHROUDED PIN ASSY, AMPMODU MTE, SINGLE ROW, .100 CL, POLARIZED, W/ LATCH WINDOWS, FOR #26-#30 AWG WIRE SIZE, STRIP FORM
PRODUCT SPEC: 108-25034	APPLICATION SPEC: 114-25026	
MATERIAL: SEE TABLE	FINISH: SEE TABLE	SIZE: A2

CUSTOMER DRAWING SCALE: 4:1 SHEET: 1 OF 1 REV: J1