

4




3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION. BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
AD	00	P	LTR	DESCRIPTION	DATE	BY	APP'D
		K		EC 063C 0760 04	25DEC04	BSV	JLG
		K1		REVISED PER ECO-09-020774	26AUG09	KK	AEG

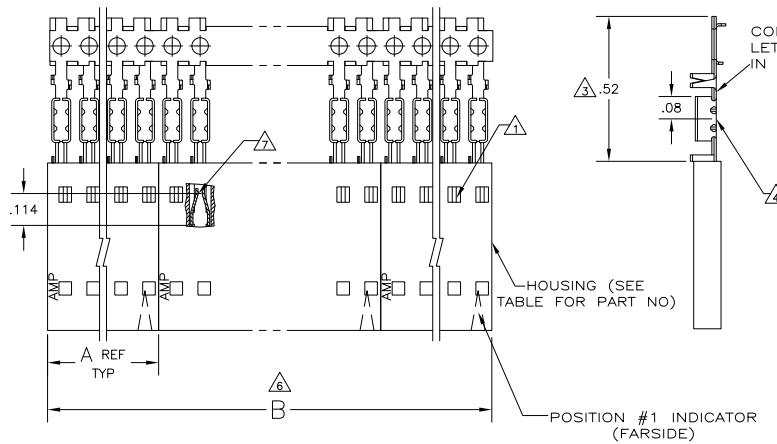

EXAMPLE: STRIP ASSEMBLY SCALE 2:1

- 1 CONTACTS ARE LATCHED INTO THE PRELOAD WINDOWS.
- 2 USE WITH #26-#30 AWG WIRE SIZE, .054/.030 INSULATION DIAMETER, .015 MAXIMUM INSULATION THICKNESS.
- 3 THE DIMENSION APPLIES WITH THE FORWARD PRELOAD STOP IN CONTACT WITH THE HOUSING SURFACE.
- 4 POINT OF MEASUREMENT FOR PLATING THICKNESS.
- 5 FOR INDIVIDUAL ASSEMBLIES SEE PART NUMBER 103903
- 6 ASSEMBLIES ARE JOINED BY THE CARRIER STRIP. ORDER QUANTITY REFLECTS TOTAL NUMBER OF INDIVIDUAL ASSEMBLIES REQUIRED. SEE TABLE FOR NUMBER OF ASSEMBLIES PER STRIP.
- 7 POINT OF MEASUREMENT FOR PLATING THICKNESS (INSIDE BEAMS).
- 8 MAXIMUM ALLOWABLE BOW OF ASSEMBLY NOT TO EXCEED .055
- 9 .000030 GOLD IN THE CONTACT AREA, .000100-.000200 BRIGHT TIN-LEAD ON THE TERMINATION AREA, ALL OVER .000050 NICKEL.
- 10 .000030 GOLD IN THE CONTACT AREA, .000100-.000200 BRIGHT TIN ON THE TERMINATION AREA, ALL OVER .000050 NICKEL.
- 11 .000030 GOLD IN THE CONTACT AREA, .000100-.000200 MATTE TIN ON THE TERMINATION AREA, ALL OVER .000050 NICKEL.
- 12 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

△ OBSOLETE	△	2	2.40	1.198	1-103688-1	12	6-103979-1
△ OBSOLETE	△	2	2.20	1.098	1-103688-0	11	6-103979-0
△ OBSOLETE	△	2	2.00	.998	103688-9	10	5-103979-9
△ OBSOLETE	△	2	1.80	.898	103688-8	9	5-103979-8
△ OBSOLETE	△	2	1.60	.798	103688-7	8	5-103979-7
△ OBSOLETE	△	2	1.40	.698	103688-6	7	5-103979-6
△ OBSOLETE	△	4	2.39	.598	103688-5	6	5-103979-5
△	△	4	1.99	.498	103688-4	5	5-103979-4
△	△	5	1.99	.398	103688-3	4	5-103979-3
△	△	8	2.40	.298	103688-2	3	5-103979-2
△	△	10	2.00	.198	103688-1	2	5-103979-1
△ OBSOLETE	△	2	2.40	1.198	1-103688-1	12	1-103979-1
△ OBSOLETE	△	2	2.20	1.098	1-103688-0	11	1-103979-0
△ OBSOLETE	△	2	2.00	.998	103688-9	10	103979-9
△ OBSOLETE	△	2	1.80	.898	103688-8	9	103979-8
△ OBSOLETE	△	2	1.60	.798	103688-7	8	103979-7
△ OBSOLETE	△	2	1.40	.698	103688-6	7	103979-6
△ OBSOLETE	△	4	2.39	.598	103688-5	6	103979-5
△	△	4	1.99	.498	103688-4	5	103979-4
△	△	5	1.99	.398	103688-3	4	103979-3
△	△	8	2.40	.298	103688-2	3	103979-2
△	△	10	2.00	.198	103688-1	2	103979-1
PLATING	△	B	A		HOUSING PART NUMBER	NO OF POSN	ASSEMBLY PART NUMBER ON STRIP

THIS DRAWING IS A CONTROLLED DOCUMENT.

DESIGNED BY: L. MAYER 5 NOV 86
 CHECKED BY: P. C. DEJONG 12 NOV 86
 APPROVED BY: P. C. DEJONG 12 NOV 86

INCHES: 0 PLC ± .010
 1 PLC ± .005
 2 PLC ± .002
 3 PLC ± .001
 4 PLG ± .005
 ANGLES ± .005

MATERIAL: HOUSING: SEE TABLE

TYCO ELECTRONICS CORPORATION
 Harrisburg, Pa 17105-3608

RCPT ASSY, AMPMODU MTE, SINGLE ROW, .100 C/L FOR #26-30 AWG WIRE SIZE, STRIP FORM

SIZE: 108-25034
 APPLICATION SPEC: 114-25026
 WEIGHT: -
 FINISH: -

SIZE CODE (DRAWING NO): A200779
 CUSTOMER DRAWING: C=103979

SCALE: 4:1 SHEET: 1 OF 1 REV: K1

AMP 1471-9 REV 31MM2000