

4


3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
AD	00	P	LTR	DESCRIPTION	DATE	BY	APPD
		M	EC	063C 0771 04	29DEC04	BSV	JLG
		M1	REVISED	PER ECO-09-020689	01SEP09	KK	AEG

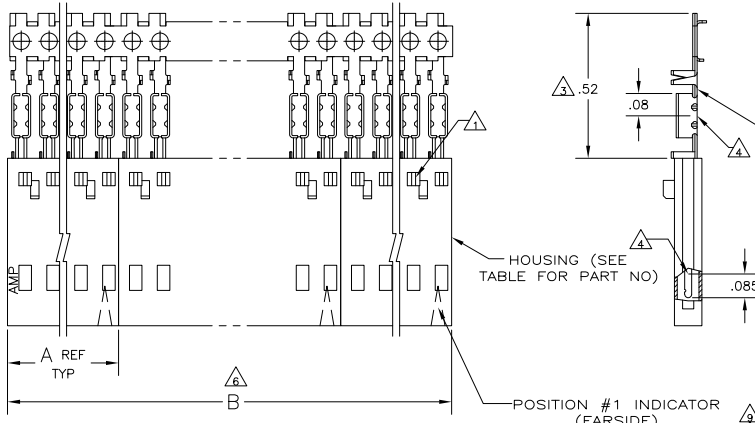

△ OBSOLETE	△	2	2.40	1.198	1-104503-1	12	6-103952-1
△ OBSOLETE	△	2	2.20	1.098	1-104503-0	11	6-103952-0
△ OBSOLETE	△	2	2.00	.998	104503-9	10	5-103952-9
△ OBSOLETE	△	2	1.80	.898	104503-8	9	5-103952-8
△ OBSOLETE	△	2	1.60	.798	104503-7	8	5-103952-7
△ OBSOLETE	△	2	1.40	.698	104503-6	7	5-103952-6
△ OBSOLETE	△	4	2.39	.598	104503-5	6	5-103952-5
△ OBSOLETE	△	4	1.99	.498	104503-4	5	5-103952-4
△	△	5	1.99	.398	104503-3	4	5-103952-3
△	△	5	1.49	.298	104503-2	3	5-103952-2
△	△	10	1.98	.198	104503-1	2	5-103952-1
△ OBSOLETE	△	2	2.40	1.198	1-104503-1	12	1-103952-1
△ OBSOLETE	△	2	2.20	1.098	1-104503-0	11	1-103952-0
△ OBSOLETE	△	2	2.00	.998	104503-9	10	103952-9
△ OBSOLETE	△	2	1.80	.898	104503-8	9	103952-8
△ OBSOLETE	△	2	1.60	.798	104503-7	8	103952-7
△ OBSOLETE	△	2	1.40	.698	104503-6	7	103952-6
△ OBSOLETE	△	4	2.39	.598	104503-5	6	103952-5
△ OBSOLETE	△	4	1.99	.498	104503-4	5	103952-4
△ SUPERSEDED	△	5	1.99	.398	104503-3	4	103952-3
△	△	5	1.49	.298	104503-2	3	103952-2
△	△	10	1.98	.198	104503-1	2	103952-1

- 1 CONTACTS ARE LATCHED INTO THE PRELOAD WINDOWS
- 2 USE WITH #22-#26 AWG WIRE SIZE, .054/.030 INSULATION DIAMETER, .015 MAXIMUM INSULATION THICKNESS
- 3 THE DIMENSION APPLIES WITH THE FORWARD PRELOAD STOP IN CONTACT WITH THE HOUSING SURFACE
- 4 POINT OF MEASUREMENT FOR PLATING THICKNESS
- 5 FOR INDIVIDUAL ASSEMBLIES SEE PART NUMBER 103895
- 6 ASSEMBLIES ARE JOINED BY THE CARRIER STRIP. ORDER QUANTITY REFLECTS TOTAL NUMBER OF INDIVIDUAL ASSEMBLIES REQUIRED. SEE TABLE FOR NUMBER OF ASSEMBLIES PER STRIP.
- 7 FINISH: PINS: .000030 GOLD IN THE CONTACT AREA, .000050-.000100 BRIGHT TIN-LEAD ON THE TERMINATION AREA, ALL OVER .000050 NICKEL
- 8 FINISH: PINS: .000030 GOLD IN THE CONTACT AREA, .000050-.000100 MATTE TIN ON THE TERMINATION AREA, ALL OVER .000050 NICKEL
- 9 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

THIS DRAWING IS A CONTROLLED DOCUMENT. DATE: 5-11-06

DESIGNED BY: L. MAYER
 CHECKED BY: P. C. DEYONG
 APPROVED BY: P. C. DEYONG

TYCO ELECTRONICS CORPORATION
 HARRISBURG, PA 17105-3608

PRODUCT SPEC: 108-25034
 APPLICATION SPEC: 114-25026

PIN ASSEMBLY, AMPMODU MTE, SINGLE ROW, .100 C/L, WITH GUIDE RIBS, FOR #22-#26 AWG WIRE SIZE, STRIP FORM

SIZE: A2 00779 C=103952

MATERIAL: HOUSING: PLATE REMANENT; CONTACTS: 99999999; SPRING: 99999999; FINISH: SEE TABLE

CUSTOMER DRAWING SCALE: 4:1 SHEET: 1 OF 1 REV: M1

AMP 1471-9 REV 31MM2000