

4


3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
AD	00	P	LTR	DESCRIPTION	DATE	BY	APPD
		W		ECO-06-029064	14DEC06	MB	JG
		W1		REVISED PER ECO-09-020689	25AUG09	KK	AEG

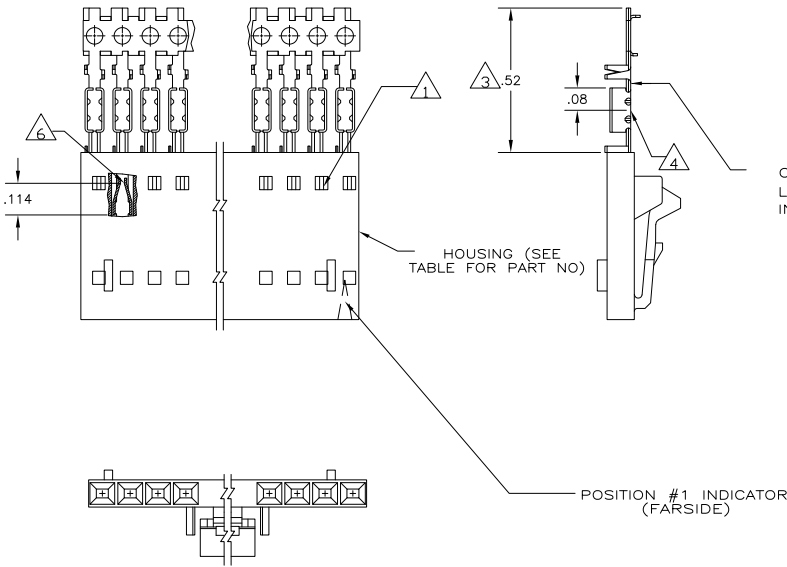

CONTACT IDENTIFICATION LETTER "B" (LOCATED IN THIS AREA)

HOUSING (SEE TABLE FOR PART NO)

POSITION #1 INDICATOR (FAR SIDE)

REV	DESCRIPTION	DATE	BY	APPD
2-104257-4	25	7-103734-4		
2-104257-3	24	7-103734-3		
2-104257-2	23	7-103734-2		
2-104257-1	22	7-103734-1		
2-104257-0	21	7-103734-0		
1-104257-9	20	6-103734-9		
1-104257-8	19	6-103734-8		
1-104257-7	18	6-103734-7		
1-104257-6	17	6-103734-6		
1-104257-5	16	6-103734-5		
1-104257-4	15	6-103734-4		
1-104257-3	14	6-103734-3		
1-104257-2	13	6-103734-2		
2-104257-4	25	2-103734-4		
2-104257-3	24	2-103734-3		
2-104257-2	23	2-103734-2		
2-104257-1	22	2-103734-1		
2-104257-0	21	2-103734-0		
1-104257-9	20	1-103734-9		
1-104257-8	19	1-103734-8		
1-104257-7	18	1-103734-7		
1-104257-6	17	1-103734-6		
1-104257-5	16	1-103734-5		
1-104257-4	15	1-103734-4		
1-104257-3	14	1-103734-3		
1-104257-2	13	1-103734-2		
1-104257-1	12	1-103734-1		
1-104257-0	11	1-103734-0		
104257-9	10	103734-9		
104257-8	9	103734-8		
104257-7	8	103734-7		
104257-6	7	103734-6		
104257-5	6	103734-5		
104257-4	5	103734-4		
104257-3	4	103734-3		
104257-2	3	103734-2		
104257-1	2	103734-1		

SUPERSEDED BY 1-103958-1
 SUPERSEDED BY 1-103958-0
 SUPERSEDED BY 103958-9
 SUPERSEDED BY 103958-8
 SUPERSEDED BY 103958-7
 SUPERSEDED BY 103958-6
 SUPERSEDED BY 103958-5
 SUPERSEDED BY 103958-4
 SUPERSEDED BY 103958-3
 SUPERSEDED BY 103958-2
 SUPERSEDED BY 103958-1

- △ CONTACTS ARE LATCHED INTO THE PRELOAD WINDOWS
- △ USE WITH #22-#26 AWG WIRE SIZE, .054/.030 INSULATION DIAMETER, .015 MAXIMUM INSULATION THICKNESS
- △ THE DIMENSION APPLIES WITH THE FORWARD PRELOAD STOP IN CONTACT WITH THE HOUSING SURFACE
- △ POINT OF MEASUREMENT FOR PLATING THICKNESS
- 5 FOR STRIP ASSEMBLIES SEE PART NUMBER 103958
- △ POINT OF MEASUREMENT FOR PLATING THICKNESS (INSIDE BEAMS)
- △ FINISH: CONTACTS-.000030 GOLD IN THE CONTACT AREA, .000050-.000100 BRIGHT TIN-LEAD ON THE TERMINATION AREA, ALL OVER .000050 NICKEL
- △ FINISH: CONTACTS-.000030 GOLD IN THE CONTACT AREA, .000050-.000100 MATTE TIN ON THE TERMINATION AREA, ALL OVER .000050 NICKEL
- △ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINIS

THIS DRAWING IS A CONTROLLED DOCUMENT. **MIN L MAYER** 04 NOV 1986
OK P DE JONG 11-12-86
APPD P DE JONG 11-12-86
PRODUCT SPEC 108-25034
APPLICATION SPEC 114-25026
RIGHT -
CUSTOMER DRAWING

Tyco Electronics Corporation
 Harrisburg, Pa 17105-3608

RCPT ASSY, AMPMODU MTE, SINGLE LATCHED & POLARIZED, FOR #22-#26 AWG WIRE SIZE

SIZE: **A2** CASE CODE (DRAWING NO): **103734** RESTRICTED TO: -
 SCALE: 4:1 SHEET 1 OF 1 REV W1

103734

A

D

C

B

A

A

A