

4


3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

| LOC | DIST | REVISIONS | | | | | |
|-----|------|-----------|-----|---------------------------|---------|-----|------|
| AD | 00 | P | LTR | DESCRIPTION | DATE | BY | APPD |
| | | P | EC | 063C 0766 04 | 27DEC04 | BSV | JLG |
| | | P1 | | REVISED PER ECO-09-020932 | 26AUG09 | KK | AEG |

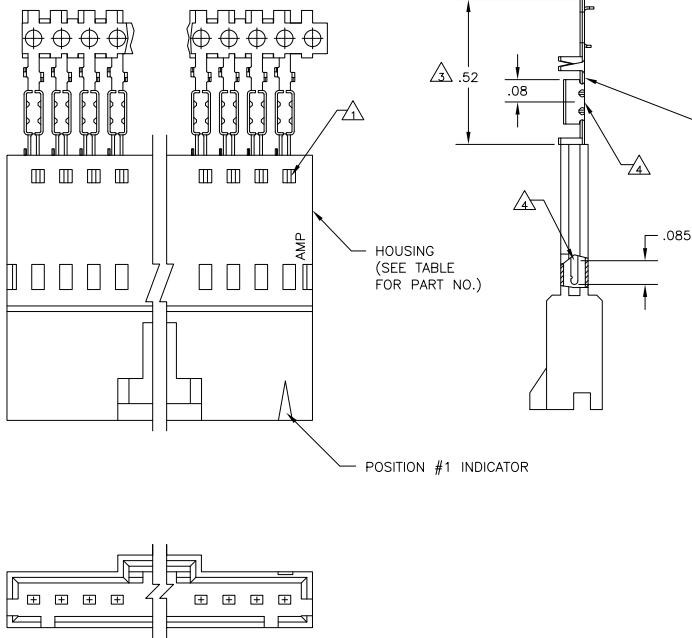

CONTACT IDENTIFICATION LETTER "D" (LOCATED IN THIS AREA)

HOUSING (SEE TABLE FOR PART NO.)

POSITION #1 INDICATOR

| | | | |
|---|------------|----|------------|
| △ | 2-103653-4 | 25 | 7-103660-4 |
| △ | 2-103653-3 | 24 | 7-103660-3 |
| △ | 2-103653-2 | 23 | 7-103660-2 |
| △ | 2-103653-1 | 22 | 7-103660-1 |
| △ | 2-103653-0 | 21 | 7-103660-0 |
| △ | 1-103653-9 | 20 | 6-103660-9 |
| △ | 1-103653-8 | 19 | 6-103660-8 |
| △ | 1-103653-7 | 18 | 6-103660-7 |
| △ | 1-103653-6 | 17 | 6-103660-6 |
| △ | 1-103653-5 | 16 | 6-103660-5 |
| △ | 1-103653-4 | 15 | 6-103660-4 |
| △ | 1-103653-3 | 14 | 6-103660-3 |
| △ | 1-103653-2 | 13 | 6-103660-2 |
| △ | 2-103653-4 | 25 | 2-103660-4 |
| △ | 2-103653-3 | 24 | 2-103660-3 |
| △ | 2-103653-2 | 23 | 2-103660-2 |
| △ | 2-103653-1 | 22 | 2-103660-1 |
| △ | 2-103653-0 | 21 | 2-103660-0 |
| △ | 1-103653-9 | 20 | 1-103660-9 |
| △ | 1-103653-8 | 19 | 1-103660-8 |
| △ | 1-103653-7 | 18 | 1-103660-7 |
| △ | 1-103653-6 | 17 | 1-103660-6 |
| △ | 1-103653-5 | 16 | 1-103660-5 |
| △ | 1-103653-4 | 15 | 1-103660-4 |
| △ | 1-103653-3 | 14 | 1-103660-3 |
| △ | 1-103653-2 | 13 | 1-103660-2 |
| △ | 1-103653-1 | 12 | 1-103660-1 |
| △ | 1-103653-0 | 11 | 1-103660-0 |
| △ | 103653-9 | 10 | 103660-9 |
| △ | 103653-8 | 9 | 103660-8 |
| △ | 103653-7 | 8 | 103660-7 |
| △ | 103653-6 | 7 | 103660-6 |
| △ | 103653-5 | 6 | 103660-5 |
| △ | 103653-4 | 5 | 103660-4 |
| △ | 103653-3 | 4 | 103660-3 |
| △ | 103653-2 | 3 | 103660-2 |
| △ | 103653-1 | 2 | 103660-1 |

- △ CONTACTS ARE LATCHED INTO THE PRELOAD WINDOWS
- △ USE WITH #22-#26 AWG WIRE SIZE, .054/.030 INSULATION DIAMETER, .015 MAXIMUM INSULATION THICKNESS
- △ THE DIMENSION APPLIES WITH THE FORWARD PRELOAD STOP IN CONTACT WITH THE HOUSING SURFACE
- △ POINT OF MEASUREMENT FOR PLATING THICKNESS
- 5 FOR STRIP ASSEMBLIES SEE PART NUMBER 103945
- △ MATERIAL- HOUSING: FLAME RETARDANT THERMOPLASTIC, COLOR: BLACK PINS: PHOS. BRONZE
- △ FINISH- PINS: .000015 GOLD IN THE CONTACT AREA, .000050-.000100 BRIGHT TIN-LEAD ON THE TERMINATION AREA, OVER .000050 NICKEL.
- △ FINISH- PINS: .000015 GOLD IN THE CONTACT AREA, .000050-.000100 MATTE TIN ON THE TERMINATION AREA, OVER .000050 NICKEL.
- △ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

SUPERSEDED BY 1-103945-1
 SUPERSEDED BY 1-103945-0
 SUPERSEDED BY 103945-9
 SUPERSEDED BY 103945-8
 SUPERSEDED BY 103945-7
 SUPERSEDED BY 103945-6
 SUPERSEDED BY 103945-5
 SUPERSEDED BY 103945-4
 SUPERSEDED BY 103945-3
 SUPERSEDED BY 103945-2
 SUPERSEDED BY 103945-1

| PLATING | HOUSING PART NUMBER | NO OF POSN | ASSEMBLY PART NUMBER |
|---------|---------------------|------------|----------------------|
|---------|---------------------|------------|----------------------|

THIS DRAWING IS A CONTROLLED DOCUMENT.

| | | | |
|-----------------------------|-------------------------------|-----------------------------|------------------|
| DIMENSIONS: INCHES | DESIGNED BY: R. BROWN 26AUG00 | DATE: 26AUG00 | BY: R. BROWN |
| OTHER DIMENSIONS: SEE TABLE | CHECKED BY: K. WRIGHT 26AUG00 | DATE: 26AUG00 | BY: K. WRIGHT |
| MATERIAL: SEE TABLE | PRODUCT SPEC: 108-25034 | APPLICATION SPEC: 114-25026 | SIZE: A2 |
| | DATE CODE (DRAWING NO): 00779 | DATE CODE (PART NO): 103660 | RESTRICTED TO: - |

Tyco Electronics Corporation
 Harrisburg, Pa 17105-3608

SHROUDED PIN ASSY, AMPMODU MTE, SINGLE ROW, .100 CL, POLARIZED, WITH LATCH WINDOWS, FOR #22-#26 AWG WIRE SIZE

CUSTOMER DRAWING SCALE: 4:1 SHEET 1 OF 1 REV P1