

NOTES:

1. ASSEMBLY NO. 71690-23** SHOWN FOR ILLUSTRATION.
2. MATES WITH PART NUMBER 71694-****.
3. SEE SHEET 2 FOR PART NUMBERS AND THEIR CONFIGURATIONS.
4. FINISHES (SEE CHART):
 TIN OVERALL - .000100/(0.00254) MINIMUM TIN OVERALL, OVER NICKEL UNDERPLATING OVERALL.
 15 GOLD - .000015/(0.00038) MINIMUM SELECT GOLD AND .000150/(0.00380) MINIMUM SELECT TIN OVER NICKEL UNDERPLATING OVERALL.
5. ITEM NUMBERS PRECEDED BY AN *X* IN THE CHART ARE NOT AVAILABLE.
6. RECOMMENDED FOR USE WITH UL # 1007 STYLE WIRE.
7. OPTIONAL COVER NUMBERS: 71611-**01 (FEED THRU) OR -**02 (FEED TO VERSION).
8. SEE SHEET 7 FOR PANEL CUTOUT DETAIL.
9. PART CONFORMS TO SPECIFICATION NO. PS-71690-001.
10. RECYCLE LOGO: >PBT< FR TO BE LOCATED IN THIS AREA.
11. IDT SLOT IDENTIFIER COLOR STRIPE TO BE LOCATED ON THIS SURFACE. ID PER CHART BELOW.

WIRE GAUGE	ID COLOR
18	FLRSCNT MAGENTA
20	BLUE
22	GREEN
24	BLACK

12. SEE SMES-71690-0000 FOR TERMINATION SPECIFICATIONS.
13. PACKAGE PER PK-71690-0000.


NOTE FOR LEAD FREE CONVERSION:

THE PRIMARY SHIPPING CARTON WILL BE LABELED 'COMPLIANT TO ROHS DIRECTIVE 2002/95/EC AND ELV ANNEX II OF DIRECTIVE 2000/53/EC'. CARTONS WITHOUT THIS LABEL MAY CONTAIN PRODUCT WITH LEAD.

REV.	DATE	DESCRIPTION
L	04/04/20	LEAD FREE CONV ECR UD2004-2042 ADAMS
K	01/01/95	CHANGE PROD SPEC PER ECR UD2001-0195 KMS 9/22/2000
J	07/22/96	ALL WHITE MAT'L PER EC # U71026 ELO 97/2/26
I	10/23/96	18 AWG CLR CHANGE PER ECR U70413 ELO 10/23/96
H	03/15/95	REVISED PER ECR U61437 03/15/95 PAIR
G	03/27/96	REVISED PER ECR U61185 03/27/96 TSE
F	08/30/95	ADD GOLD ASSY'S PER ECR U51189 08/30/95 SCS
E	07/26/95	REV CHARTS/D DIM PER ECR U60094 07/26/95 SCS
D	04/17/95	ADD HOLE/NOTE I2 PER ECR U50939 04/17/95 SCS
C	08/10/94	ADD DIM/REV NOTE PER ECR U40014 8/10/94 SCS
B		ADD NOTE 11 PER ECR U40717 6/29/94 SCS
A		FINAL RELEASE PER ECR U40514 4/25/94 SCS


DIMENSIONS SHOWN (METRIC) INCH		REVISE ONLY ON CAD SYSTEM									
SALES OVERSIZE SPECIFIED TOLERANCES ANGULAR ± 0.2°		TITLE									
<table border="1"> <thead> <tr> <th>INCH</th> <th>METRIC</th> </tr> </thead> <tbody> <tr> <td>3 PLACE ± .010</td> <td>---</td> </tr> <tr> <td>2 PLACE ± .014 ± 0.25</td> <td>---</td> </tr> <tr> <td>1 PLACE --- ± 0.36</td> <td>---</td> </tr> </tbody> </table>		INCH	METRIC	3 PLACE ± .010	---	2 PLACE ± .014 ± 0.25	---	1 PLACE --- ± 0.36	---	MINI-FIT IDT SINGLE ROW PLUG SALES ASSEMBLY SHEET NO. 1 OF 8 DATE 01/28/93	
INCH	METRIC										
3 PLACE ± .010	---										
2 PLACE ± .014 ± 0.25	---										
1 PLACE --- ± 0.36	---										
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		MOLEX INCORPORATED U.S.A. 68532									
DRG. NO. RWB CHG. BY SAS FILE NAME 571690X1 APP'D. DGA		DRG. NO. SDA-71690-**** SEE CHART									
SCALE 4:1		NO DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INC. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION. TC									

CKT SIZE	STAT	ASSEMBLY ITEM NUMBER	PANEL MOUNTS	WIRE AWG	WIRE DESCRIPTION	DIMENSION A		DIMENSION B		DIMENSION C		PLATING SEE NOTE 4
						INCH	(MM)	INCH	(MM)	INCH	(MM)	
2		71690-1001	NO	18	SOLID,FUSED STRANDED,STRANDED	0.490	(12.45)	0.378	(9.60)	0.1654	(4.20)	TIN OVERALL
2		71690-1003	NO	20		0.490	(12.45)	0.378	(9.60)	0.1654	(4.20)	TIN OVERALL
2		71690-1004	NO	22		0.490	(12.45)	0.378	(9.60)	0.1654	(4.20)	TIN OVERALL
2		71690-1005	NO	24		0.490	(12.45)	0.378	(9.60)	0.1654	(4.20)	TIN OVERALL
2		71690-1007	NO	18		0.490	(12.45)	0.378	(9.60)	0.1654	(4.20)	15 GOLD
2		71690-1009	NO	20		0.490	(12.45)	0.378	(9.60)	0.1654	(4.20)	15 GOLD
2		71690-1010	NO	22		0.490	(12.45)	0.378	(9.60)	0.1654	(4.20)	15 GOLD
2		71690-1011	NO	24		0.490	(12.45)	0.378	(9.60)	0.1654	(4.20)	15 GOLD
2		71690-1101	YES	18		0.821	(20.48)	0.378	(9.60)	0.1654	(4.20)	TIN OVERALL
2		71690-1103	YES	20		0.821	(20.48)	0.378	(9.60)	0.1654	(4.20)	TIN OVERALL
2		71690-1104	YES	22		0.821	(20.48)	0.378	(9.60)	0.1654	(4.20)	TIN OVERALL
2		71690-1105	YES	24		0.821	(20.48)	0.378	(9.60)	0.1654	(4.20)	TIN OVERALL
2		71690-1107	YES	18		0.821	(20.48)	0.378	(9.60)	0.1654	(4.20)	15 GOLD
2		71690-1109	YES	20		0.821	(20.48)	0.378	(9.60)	0.1654	(4.20)	15 GOLD
2		71690-1110	YES	22		0.821	(20.48)	0.378	(9.60)	0.1654	(4.20)	15 GOLD
2		71690-1111	YES	24		0.821	(20.48)	0.378	(9.60)	0.1654	(4.20)	15 GOLD
3		71690-1401	NO	18		0.655	(16.65)	0.543	(13.80)	0.3307	(8.40)	TIN OVERALL
3		71690-1403	NO	20		0.655	(16.65)	0.543	(13.80)	0.3307	(8.40)	TIN OVERALL
3		71690-1404	NO	22		0.655	(16.65)	0.543	(13.80)	0.3307	(8.40)	TIN OVERALL
3		71690-1405	NO	24		0.655	(16.65)	0.543	(13.80)	0.3307	(8.40)	TIN OVERALL
3		71690-1407	NO	18		0.655	(16.65)	0.543	(13.80)	0.3307	(8.40)	15 GOLD
3		71690-1409	NO	20		0.655	(16.65)	0.543	(13.80)	0.3307	(8.40)	15 GOLD
3		71690-1410	NO	22		0.655	(16.65)	0.543	(13.80)	0.3307	(8.40)	15 GOLD
3		71690-1411	NO	24		0.655	(16.65)	0.543	(13.80)	0.3307	(8.40)	15 GOLD
3		71690-1501	YES	18		0.986	(25.05)	0.543	(13.80)	0.3307	(8.40)	TIN OVERALL
3		71690-1503	YES	20		0.986	(25.05)	0.543	(13.80)	0.3307	(8.40)	TIN OVERALL
3		71690-1504	YES	22		0.986	(25.05)	0.543	(13.80)	0.3307	(8.40)	TIN OVERALL
3		71690-1505	YES	24		0.986	(25.05)	0.543	(13.80)	0.3307	(8.40)	TIN OVERALL
3		71690-1507	YES	18		0.986	(25.05)	0.543	(13.80)	0.3307	(8.40)	15 GOLD
3		71690-1509	YES	20		0.986	(25.05)	0.543	(13.80)	0.3307	(8.40)	15 GOLD
3		71690-1510	YES	22		0.986	(25.05)	0.543	(13.80)	0.3307	(8.40)	15 GOLD
3		71690-1511	YES	24	SOLID, FUSED STRANDED, STRANDED	0.986	(25.05)	0.543	(13.80)	0.3307	(8.40)	15 GOLD



L	SEE SHEET I
H	SEE SHEET I
F	SEE SHEET I
D	SEE SHEET I
C	SEE SHEET I
A	SEE SHEET I
4	SEE SHEET I
3	SEE SHEET I
2	SEE SHEET I
1	SEE SHEET I

POLARIZATION SCHEME

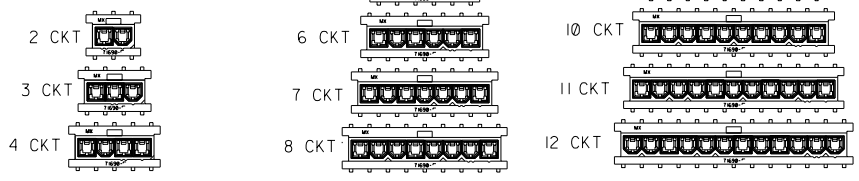

DIMENSIONS SHOWN IN METRIC INCH		REVISE ONLY ON CAD SYSTEM	
UNLESS OTHERWISE SPECIFIED TOLERANCES: ANGULAR ± 1/2°		MFG. SH. REV. LTR. REVISIONS	
± PLACE ± .010	---	TITLE: MINI-FIT IDT SINGLE ROW PLUG ASSEMBLY	
± PLACE ± .014	± 0.25	PART NO. MOLEX INCORPORATED 151EJLL 68532	
± PLACE ---	± 0.36	SHEET NO. 2 DATE 01/28/93	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE CHART SDA-71690-***	
DRWG. BY: RWB	CHK'D. BY: SAS	FILE NAME: ST151EJLL2.DWG	
APP'D. BY:	SCALE: 1	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INC. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION. TC	

CKT SIZE	S A	ASSEMBLY ITEM NUMBER	PANEL MOUNTS	WIRE AWG		DIMENSION A		DIMENSION B		DIMENSION C		PLATING SEE NOTE 4
						INCH	(MM)	INCH	(MM)	INCH	(MM)	
6		71690-2601	NO	18	SOLID, FUSED STRANDED, STRANDED	1.152	(29.25)	1.039	(26.40)	0.8270	(21.00)	TIN OVERALL
6		71690-2603	NO	20		1.152	(29.25)	1.039	(26.40)	0.8270	(21.00)	
6		71690-2604	NO	22		1.152	(29.25)	1.039	(26.40)	0.8270	(21.00)	
6		71690-2605	NO	24		1.152	(29.25)	1.039	(26.40)	0.8270	(21.00)	
6		71690-2607	NO	18		1.152	(29.25)	1.039	(26.40)	0.8270	(21.00)	15 GOLD
6		71690-2609	NO	20		1.152	(29.25)	1.039	(26.40)	0.8270	(21.00)	
6		71690-2610	NO	22		1.152	(29.25)	1.039	(26.40)	0.8270	(21.00)	
6		71690-2611	NO	24		1.152	(29.25)	1.039	(26.40)	0.8270	(21.00)	TIN OVERALL
6		71690-2701	YES	18		1.482	(37.65)	1.039	(26.40)	0.8270	(21.00)	
6		71690-2703	YES	20		1.482	(37.65)	1.039	(26.40)	0.8270	(21.00)	
6		71690-2704	YES	22		1.482	(37.65)	1.039	(26.40)	0.8270	(21.00)	
6		71690-2705	YES	24		1.482	(37.65)	1.039	(26.40)	0.8270	(21.00)	15 GOLD
6		71690-2707	YES	18		1.482	(37.65)	1.039	(26.40)	0.8270	(21.00)	
6		71690-2709	YES	20		1.482	(37.65)	1.039	(26.40)	0.8270	(21.00)	
6		71690-2710	YES	22		1.482	(37.65)	1.039	(26.40)	0.8270	(21.00)	
6		71690-2711	YES	24		1.482	(37.65)	1.039	(26.40)	0.8270	(21.00)	TIN OVERALL
7		71690-3001	NO	18		1.317	(33.45)	1.205	(30.60)	0.9924	(25.20)	
7		71690-3003	NO	20		1.317	(33.45)	1.205	(30.60)	0.9924	(25.20)	
7		71690-3004	NO	22		1.617	(33.45)	1.205	(30.60)	0.9924	(25.20)	
7		71690-3005	NO	24		1.317	(33.45)	1.205	(30.60)	0.9924	(25.20)	15 GOLD
7		71690-3007	NO	18		1.317	(33.45)	1.205	(30.60)	0.9924	(25.20)	
7		71690-3009	NO	20		1.317	(33.45)	1.205	(30.60)	0.9924	(25.20)	
7		71690-3010	NO	22		1.317	(33.45)	1.205	(30.60)	0.9924	(25.20)	
7		71690-3011	NO	24		1.317	(33.45)	1.205	(30.60)	0.9924	(25.20)	TIN OVERALL
7		71690-3101	YES	18		1.648	(41.85)	1.205	(30.60)	0.9924	(25.20)	
7		71690-3103	YES	20		1.648	(41.85)	1.205	(30.60)	0.9924	(25.20)	
7		71690-3104	YES	22		1.648	(41.85)	1.205	(30.60)	0.9924	(25.20)	
7		71690-3105	YES	24		1.648	(41.85)	1.205	(30.60)	0.9924	(25.20)	15 GOLD
7		71690-3107	YES	18		1.648	(41.85)	1.205	(30.60)	0.9924	(25.20)	
7		71690-3109	YES	20		1.648	(41.85)	1.205	(30.60)	0.9924	(25.20)	
7		71690-3110	YES	22		1.648	(41.85)	1.205	(30.60)	0.9924	(25.20)	
7		71690-3111	YES	24	SOLID, FUSED STRANDED, STRANDED	1.648	(41.85)	1.205	(30.60)	0.9924	(25.20)	

L	SEE SHEET I
H	SEE SHEET I
F	SEE SHEET I
E	SEE SHEET I
A	SEE SHEET I
4	SEE SHEET I
2	SEE SHEET I
I	SEE SHEET I

DIMENSIONS SHOWN IN METRIC INCH		REVISIONS ONLY ON CAD SYSTEM	
UNLESS OTHERWISE SPECIFIED TOLERANCES: ANGULAR ± 1/2°		MFG. SH. REV. LTR. REVISIONS	
3 PLACE ± .010	---	TITLE	
2 PLACE ± .014	± 0.25	MINI-FIT IDT SINGLE ROW PLUG ASSEMBLY	
1 PLACE ---	± 0.36	MOLEX INCORPORATED U.S.A. SHEET NO. 4 DATE 03/10/93	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		PART NO. SDA-71690-****	
DRWG. BY RWB	CHKD. BY SAS	SEE CHART	
APPD. BY	SCALE	NO DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INC. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.	



MOLEX INCORPORATED
LISLE, ILL. 60532 U.S.A.

WIRE TERMINATION SPECIFICATION

- 1.0 APPLICABLE DRAWINGS:
THIS SPECIFICATION APPLIES TO A-71690 AND A-71694 SERIES OF INSULATION DISPLACEMENT CONNECTORS.
- 2.0 SCOPE:
THIS SPECIFICATION IS DESIGNED TO INSURE THE PROPER TERMINATION AND PERFORMANCE OF THE A-71690 AND A-71694 SERIES OF INSULATION DISPLACEMENT CONNECTORS.
- 3.0 GENERAL:
THE .1654/(4.20) CENTER INSULATION DISPLACEMENT CONNECTOR SYSTEM IS DESIGNED TO INTERCONNECT DISCRETE WIRE AS OUTLINED IN THIS SPECIFICATION.

4.0 CONDUCTOR REQUIREMENTS:

4.1 CONDUCTOR SIZE IDENTIFICATION:

CONDUCTOR SIZE	CONDUCTOR STYLE	HOUSING ID COLOR (SEE FIG. 4)	TERMINAL ID HOLE POSITION (SEE FIG.8; SHT.5)
18 AWG	STRANDED WITH TOPCOAT,FUSED, SOLID	RED	POSITION 1
20 AWG	STRANDED WITH TOPCOAT,FUSED, SOLID	BLUE	POSITION 2
22 AWG	STRANDED WITH TOPCOAT,FUSED, SOLID	GREEN	POSITION 3
24 AWG	STRANDED WITH TOPCOAT,FUSED, SOLID	BLACK	POSITION 4

RECOMMENDED UL STYLE: 1007, 1061

4.2 INSULATION REQUIREMENTS:


INSULATION DIAMETER: .090 MAX
INSULATION HARDNESS: 85 MAX ON THE SHORE A SCALE

5.0 TERMINATION REQUIREMENTS:

5.1 CABLE INSERTION DEPTH:

THE CABLE SHOULD BE INSERTED TO DEPTH OF .140/(3.56)* FROM THE TOP OF THE HOUSING TO THE TOP OF THE WIRE (SEE FIGURE 2). WIRE MUST BE LOCATED BELOW THE BOTTOM OF EAGLES.

* TERMINATION DEPTH FOR THE 24 AWG WIRES IN THE FOLLOWING ASSEMBLIES TO BE .138±.005/(3.51±0.13); 71690-6008 AND 71694-2402.

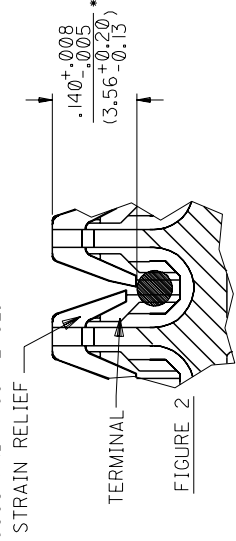

REV.	B	A	B	B	B
SHT.	1	2	3	4	5

FILE NAME: T71690X1
 = 0
 = 0

REVISE ONLY ON CAD SYSTEM

REV.

SHT.

1 OF 5

DRWG. NO. SMES-71690-0000

DRWG. NO. SMES-71690-0000

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INC. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.



WIRE TERMINATION SPECIFICATION

5.2 WIRE CUT OFF

IN THE FEED-TO VERSION THE WIRE MUST BE DISPLACED IN BOTH INSULATION DISPLACEMENT SLOTS AND MUST PROTRUDE THROUGH THE SECONDARY SLOT BY (1.52)/.060 MIN. AS SHOWN IN FIGURE 3.

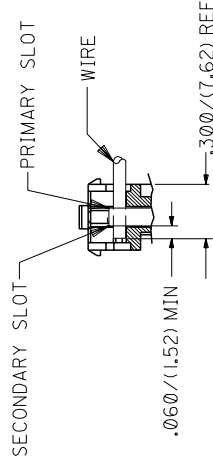


FIGURE 3

5.3 HORIZONTAL PULL OUT FORCE

THE CONNECTOR MUST MAINTAIN THE FOLLOWING MIN. PULL OUT VALUES WHEN A FORCE IS APPLIED AT A RATE OF 1 INCH PER MINUTE TO THE CABLE IN A DIRECTION PERPENDICULAR TO THE INSULATION DISPLACEMENT SECTION, AS SHOWN IN FIGURE 4. (NOTE CABLE MUST BE SLIT TO FORM INDIVIDUAL CONDUCTORS AFTER TERMINATION BUT PRIOR TO TESTING).

AWG	PULL FORCE
18 AWG	14.0 LBS. MIN.
20 AWG	TBD
22 AWG	TBD
24 AWG	8.0 LBS. MIN.

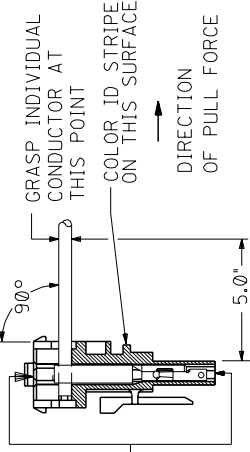


FIGURE 4

CONNECTOR TO BE SECURELY MOUNTED

5.4 VERTICAL PULL OUT FORCE

THE CONNECTOR MUST MAINTAIN THE FOLLOWING MIN. PULL OUT VALUES WHEN A FORCE IS APPLIED AT A RATE OF 1 INCH PER MINUTE TO THE CABLE IN A DIRECTION PARALLEL TO THE INSULATION DISPLACEMENT SECTION, AS SHOWN IN FIGURE 5. (NOTE CABLE MUST BE SLIT TO FORM INDIVIDUAL CONDUCTORS AFTER TERMINATION BUT PRIOR TO TESTING).

AWG	PULL FORCE
18 AWG	5.0 LBS. MIN.
20 AWG	TBD
22 AWG	TBD
24 AWG	2.4 LBS. MIN.

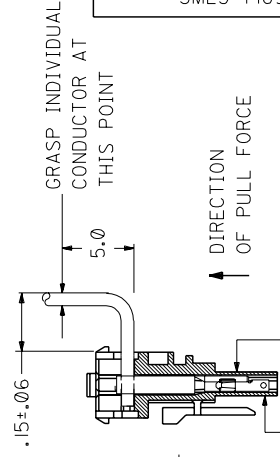


FIGURE 5

REV.

SHT.

FILE NAME
T71690X2

CONNECTOR TO BE SECURELY MOUNTED

REV. A

SHT. 2



MOLEX INCORPORATED
LISLE, ILL. 60532 U.S.A.

WIRE TERMINATION SPECIFICATION

5.5 TORSIONAL RESISTANCE:
CONNECTOR MUST WITHSTAND A MAXIMUM TWIST OF 130° WITHOUT DISTURBING THE INSULATION DISPLACEMENT INTERFACE IN THE PRIMARY OR SECONDARY SLOTS (SEE FIGURE 3) (NOTE CABLE MUST BE SLIT TO FORM INDIVIDUAL CONDUCTORS AFTER TERMINATION BUT PRIOR TO TESTING).

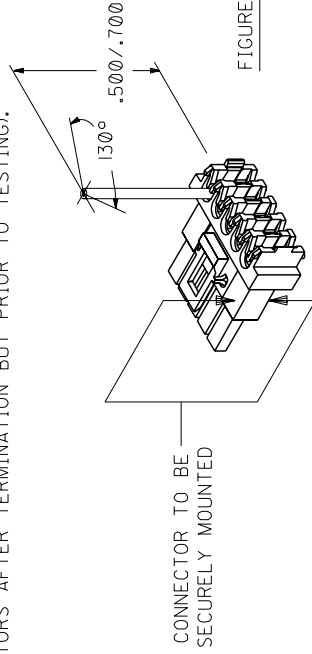


FIGURE 6

5.6 VISUAL INSPECTION:
AFTER TERMINATION, INSULATION DISPLACEMENT SECTION OF THE TERMINAL TO BE FREE OF TOOL MARKS FROM TERMINATION EQUIPMENT.

6.0 TERMINATION EVALUATION PROCEDURE:

STEP 1 - STRAIN RELIEF REMOVAL
REMOVE SHADED PORTION OF THE STRAIN RELIEF USING A RAZOR BLADE

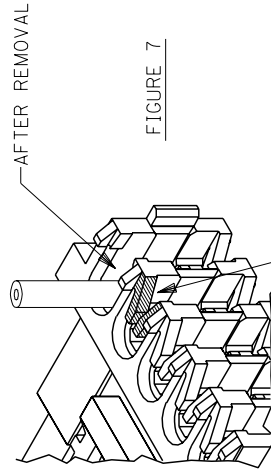


FIGURE 7

STEP 2 - REMOVAL OF TERMINAL
INSERT THE REMOVAL TOOL (#HT60630A) INTO THE FRONT OF OF THE CONNECTOR (AROUND THE TERMINAL) TO DEPRESS LOCK TANGS. PUSH THE TERMINAL/WIRE OUT THE BACK OF THE CONNECTOR.

DRWG. NO. SMES-71690-0000

REV.
SHT.

FILE NAME
T71690X3

REVISION SYMBOL = 0

REVISE ONLY ON CAD SYSTEM

REV. B
SHT. 3

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INC. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.


DRWG. NO. SMES-71690-0000




MOLEX INCORPORATED
LISLE, ILL. 60532 U.S.A.

WIRE TERMINATION SPECIFICATION


STEP 3 -CONDUCTOR REMOVAL
USING A SMALL PAIR OF PLIERS SPREAD THE I.D.T. SLOT
AND REMOVE CONDUCTOR BY PUSHING IN DIRECTION SHOWN

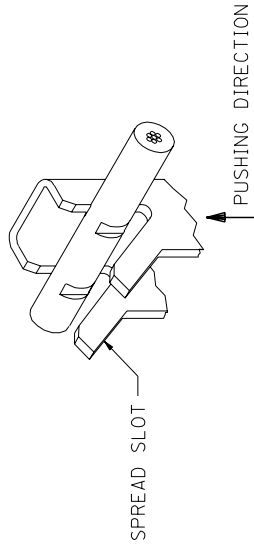

STEP 4 -REMOVING INSULATION
INSULATION TO BE REMOVED WITHOUT DISTURBING I.D.T. AREA



STEP 5 -CONDUCTOR INSPECTION
FOUR DEFORMATION POINTS MUST BE CLEARLY VISIBLE WHEN
USING 10X MAGNIFICATION

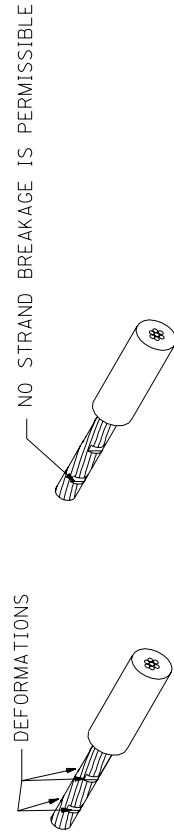

DRWG. NO. SMES-71690-0000

REV.
SHT.

FILE NAME
T71690X4

▽ = 0 ▲ = 0

REVISE ONLY ON CAD SYSTEM

REV. B

SHT. 4

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INC. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.

DRWG. NO. SMES-71690-0000



MOLEX INCORPORATED
 LISLE, ILL. 60532
 U.S.A.

WIRE TERMINATION SPECIFICATION


LTR.	REVISIONS
A	RELEASED PER ECR U51189 09/15/95 sas
B	UPDATED PER ECR U70308 ELO 09/20/96

STEP 1 - REMOVAL OF TERMINAL

INSERT THE REMOVAL TOOL (#HT60630A) INTO THE FRONT OF OF THE CONNECTOR (AROUND THE TERMINAL) TO DEPRESS LOCK TANGS.
 PUSH THE TERMINAL/WIRE OUT THE BACK OF THE CONNECTOR.

STEP 2 - WIRE GAGE PER CHART

ID LETTER	WIRE GAGE
D	18 AWG
C	20 AWG
B	22 AWG
A	24 AWG



ID LETTER

FIGURE 8

DRWG. NO. SMES-7 1690-0000

REV.
SHT.
T71690X5

FILE NAME
T71690X5

REV. = 0

REVISE ONLY ON CAD SYSTEM

REV. B

SHT. 5

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INC. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.

DRWG. NO. SMES-7 1690-0000