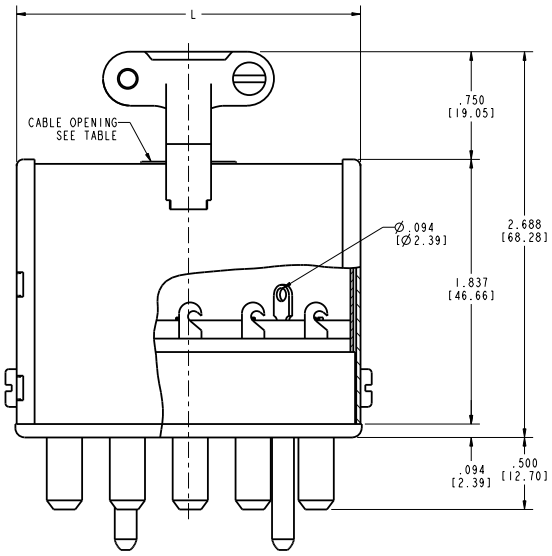

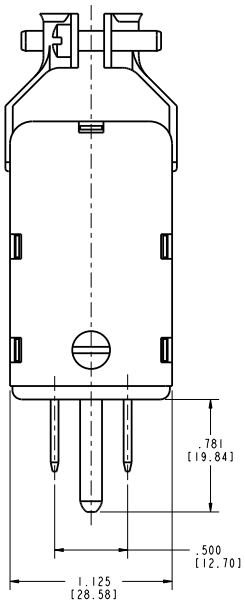

NOTES:

1. SPECIFICATIONS:

ELECTRICAL:
OPERATING VOLTAGE: 250 VAC RMS
CURRENT RATING: 15 AMPS
CURRENT RESISTANCE: 1.0 MILLIOHMS MAXIMUM

INSULATOR: MOLDED MONBLOCK, GENERAL PURPOSE PHENOLIC, BLACK

CONTACT: BRASS, MATTE TIN

BRACKET, SCREW: STEEL, ZINC WITH CLEAR TRAVALENT CHROME

CAP: BLACK CRINKLE

LINER: PAPER, CELLULOSE BASED, UL 94V-0

ENVIRONMENTAL:
OPERATING TEMPERATURE: UP TO +105°C

TERMINATION: SOLDER

2. DIMENSIONS IN [ ] ARE MILLIMETERS

3. ALL DIMENSIONS ARE REFERENCE

PART NUMBER	SIZE	L	CABLE OPENING	FACTORY NUMBER
P-2404H-CCT	4	1.063 [27.00]	.438 [11.13]	703 03 04 002
P-2406H-CCT	6	1.500 [38.10]	.438 [11.13]	703 03 06 002
P-2408H-CCT	8	1.938 [49.23]	.563 [14.30]	703 03 08 002
P-2410H-CCT	10	2.375 [60.33]	.563 [14.30]	703 03 10 002
P-2412H-CCT	12	2.813 [71.45]	.625 [15.88]	703 03 12 002

DRAWING REVISIONS

REV	DOCUMENT	APP	DATE
1	DO 06-1068		

RoHS COMPLIANT

UNITS ENGLISH INCHES

PRO/E

DO NOT SCALE DRAWING

UNLESS OTHERWISE SPECIFIED: ALL DIMENSIONS ARE IN INCHES
FILLET/RADIUS .02 MAX
TOLERANCES .X ± .1 .XX ± .01 .XXX ± .005 ANGULAR ± 1°

THIS DOCUMENT IS THE PROPERTY OF CINCH. NEITHER THIS DOCUMENT NOR ANY OF THE INFORMATION CONTAINED IN IT MAY BE DUPLICATED OR DISCLOSED WITHOUT PRIOR WRITTEN CONSENT OF CINCH.

DRAWN BY: JIMENEZ	DATE: 8/1/06	TITLE: PLUG AND CAP ASSEMBLIES
DESIGN ENGINEER: A. BALI	DATE: 8/1/06	MATERIAL
DESIGN ENGINEERING MGR.		MATERIAL SPEC NUMBER / FINISH
MFG. ENGINEERING		CAD FILE NUMBER: P2404HCCT
QUALITY ASSURANCE		CAGE IDENT NO.: 71785 / SIZE: B

Cinch

MODELED BY: JIMENEZ

1700 FINLEY RD
LOMBARD, IL. 60148

CONTROL SPEC NUMBER: 06-1068

PROJECT NUMBER: C14789-2

DRAWING NUMBER: P-2404H-CCT

SCALE: 1.000

SHEET 1 OF 1

Downloaded from Elcodis.com electronic components distributor