



REVOLUTIONS		DATE	APP
0	RLSE PER NPR 4310 WAS 92-5730-2	8-14-92	-
A	REV PER EC 0020-1041-93	10/09/98	JS

▲ POLYESTER PBT, BLACK, UL RATED 94V-1 OR BETTER.
 ▲ PHOSPHOR BRONZE PER QQ-B-750.
 ▲ 0.38µm [1.000015] MIN GOLD ON LOCALIZED GOLD PLATE AREA,
 2.54µm [1.000100] MIN TIN-LEAD ON TERMINATION END,
 ALL OVER 1.27µm [1.000500] MIN NICKEL ON ENTIRE CONTACT.

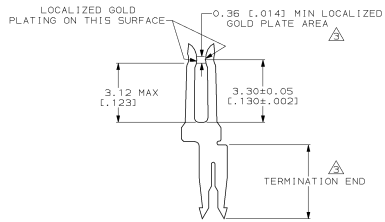

DETAIL Z
SCALE 10:1
TYPICAL



40		111655-1	
NO OF POSN		PART NO	
AMP AMP Incorporated Harrisburg, PA 17105-3608			
NAME		RECEPTACLE ASSY, MILITARY POLARIZATION, NOVQ, AMP-LATCH™	
DO NOT SCALE PRINT. UNLESS SPECIFIED, DIMENSIONS IN mm (INCHES) TOLERANCES ON: 2 PLG DEC 40-131-9999 3 PLG DEC 40-131-9999 ANGLES ° ± °	DR 8-14-92 H NELL CHK 8-17-92 S STONE	APPRO 8-17-92 J STINE	PRODUCT SPEC 10B-40000
MATERIAL HOUSING & COVER: ▲ CONTACTS: ▲	FINISH CONTACTS: ▲	APPLICATION SPEC 114-40005	WEIGHT
SIZE		CAGE CODE	DRAWING NO
D		00779	111655
SCALE		SHEET	
4:1		1 OF 1	

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING AND MOST RECENT REVISION SHOULD BE CONTACTED FOR THE LATEST REVISION.