



▲ POLYESTER, BLACK, UL RATED 94V-0.
 ▲ PHOSPHOR BRONZE PER QQ-B-750.
 ▲ 0.38µm [1.000015] MIN GOLD ON LOCALIZED GOLD PLATE AREA,
 2.54µm [1.000100] MIN TIN-LEAD ON TERMINATION END, ALL
 OVER 1.27µm [1.000500] MIN NICKEL ON ENTIRE CONTACT.

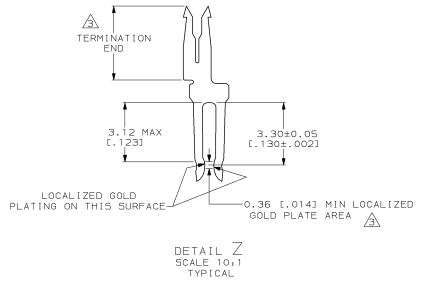

34	111826-B
NO OF POSN	PART NUMBER
	PART NO

DO NOT SCALE PRINT, UNLESS SPECIFIED. DIMENSIONS IN mm (INCHES) TOLERANCES ON: 2 PLC DEC ± 0.13 [1.050] 3 PLC DEC ± 0.25 [1.000] ANGLES ± 0.5°	DR 01/05/94 0.48172 CHK 01/05/94 S.G. LEMER APPD 01/12/94 J. STINE APPD 01/12/94 D. HOFFMAN PRODUCT SPEC 10B-40000	AMP AMP Incorporated Harrisburg, PA 17105-3608 NAME RECEPTACLE, FULL COVER, MILITARY POLARIZATION, NOVO, AMP-LATCH™
MATERIAL MOLDED PARTS: ▲ CONTACTS: ▲	APPLICATION SPEC 114-40005 WEIGHT	SIZE D CAGE CODE 00779 DRAWING NO 111826 SCALE 4:1 SHEET 1 OF 1

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING AND HISTORY ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.

CUSTOMER DRAWING