

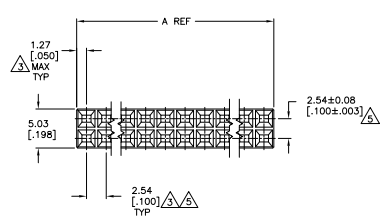



SEE SHEET 2  
 FOR P/N'S -51 THRU -90



- △ HOUSING: FLAME RETARDANT, GLASS FILLED, THERMOPLASTIC, COLOR: BLACK. CONTACT: PHOSPHOR BRONZE
- △ CONTACT: DUPLEX PLATED 0.76µm[0.00030] GOLD IN CONTACT AREA, 3.81-7.62µm[0.00150-0.00300] BRIGHT TIN-LEAD ON LEADS, ALL OVER 1.27µm[0.00050] NICKEL
- △ THESE DIMENSIONS PERTAIN TO CAVITY CENTERLINES ONLY - NOT TO CONTACT LOCATIONS
- △ PART NUMBER AND DATE CODE ARE MARKED IN APPROXIMATE LOCATION SHOWN.
- △ TOLERANCE IS NON-CUMULATIVE.
- △ 2 POSITION DATE CODE IS MARKED OPPOSITE SIDE OF TE CONNECTIVITY LOGO.
- △ POINT-OF-MEASUREMENT DIMENSION FOR PLATING THICKNESS (INSIDE CONTACT BEAM).
- △ POINT-OF-CONTACT DIMENSION.
- △ TE CONNECTIVITY TRADEMARK AND CSA LOGO ARE MOLDED INTO HOUSING, THIS LOCATION.
- △ NO PART NUMBER MARKING REQUIRED FOR THIS PART.
- △ CONTACT: DUPLEX PLATED 0.76µm[0.00030] GOLD IN CONTACT AREA, 3.81-7.62µm[0.00150-0.00300] MATTE TIN ON LEADS, ALL OVER 1.27µm[0.00050] NICKEL
- △ ROHS 2002/95/EC COMPLIANT
- △ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

△△ SUPERCEDED BY 9-534998-0	99.06 [3.900]	101.60 [4.000]	80	4-534998-0
OBSOLETE	98.52 [3.900]	99.06 [3.900]	78	3-534998-9
	93.98 [3.700]	96.52 [3.800]	76	3-534998-8
	91.44 [3.600]	93.98 [3.700]	74	3-534998-7
	B	A	NO OF POSN	PART NUMBER

△△ OBSOLETE	88.90 [3.500]	91.44 [3.600]	72	3-534998-6
SUPERCEDED BY 8-534998-4	86.36 [3.400]	88.90 [3.500]	70	3-534998-5
	83.82 [3.300]	86.36 [3.400]	68	3-534998-4
△△ OBSOLETE	81.28 [3.200]	83.82 [3.300]	66	3-534998-3
	78.74 [3.100]	81.28 [3.200]	64	3-534998-2
△	76.20 [3.000]	78.74 [3.100]	62	3-534998-1
	73.66 [2.900]	76.20 [3.000]	60	3-534998-0
△△ OBSOLETE	71.12 [2.800]	73.66 [2.900]	58	2-534998-9
	68.58 [2.700]	71.12 [2.800]	56	2-534998-8
SUPERCEDED BY 7-534998-6	66.04 [2.600]	68.58 [2.700]	54	2-534998-7
	63.50 [2.500]	66.04 [2.600]	52	2-534998-6
△	60.96 [2.400]	63.50 [2.500]	50	2-534998-5
	58.42 [2.300]	60.96 [2.400]	48	2-534998-4
△△ OBSOLETE	55.88 [2.200]	58.42 [2.300]	46	2-534998-3
	53.34 [2.100]	55.88 [2.200]	44	2-534998-2
△ OBSOLETE	50.80 [2.000]	53.34 [2.100]	42	2-534998-1
	48.26 [1.900]	50.80 [2.000]	40	2-534998-0
△	45.72 [1.800]	48.26 [1.900]	38	1-534998-9
	43.18 [1.700]	45.72 [1.800]	36	1-534998-8
△	40.64 [1.600]	43.18 [1.700]	34	1-534998-7
	38.10 [1.500]	40.64 [1.600]	32	1-534998-6
△	35.56 [1.400]	38.10 [1.500]	30	1-534998-5
	33.02 [1.300]	35.56 [1.400]	28	1-534998-4
△	30.48 [1.200]	33.02 [1.300]	26	1-534998-3
	27.94 [1.100]	30.48 [1.200]	24	1-534998-2
△	25.40 [1.000]	27.94 [1.100]	22	1-534998-1
	22.86 [900]	25.40 [1.000]	20	1-534998-0
△	20.32 [800]	22.86 [900]	18	534998-9
	17.78 [700]	20.32 [800]	16	534998-8
△	15.24 [600]	17.78 [700]	14	534998-7
	12.70 [500]	15.24 [600]	12	534998-6
△	10.16 [400]	12.70 [500]	10	534998-5
	7.62 [300]	10.16 [400]	8	534998-4
△	5.08 [200]	7.62 [300]	6	534998-3
	2.54 [100]	5.08 [200]	4	534998-2
△	-	2.54 [100]	2	534998-1

THIS DRAWING IS A CONTROLLED DOCUMENT. IN REVISION (REV) DATE (DATE)

DESIGNER	DATE	REVISED	DATE
108-250222	25.40		
114-25018			

TE Connectivity  
 RECEPTACLE ASSEMBLY, MOD N,  
 DOUBLE ROW, DUAL ENTRY, 1000:100CL,  
 VERTICAL MOUNT, AMPRODU

CUSTOMER DRAWING 100779 (G)=534998

THIS DRAWING IS UNPUBLISHED  
 ALL RIGHTS RESERVED

REV	DATE	DESCRIPTION	BY	APP
00				
SEE SHEET 1				

REV	DATE	DESCRIPTION	BY	APP
72				
70				
68				
66				
64				
62				
60				
58				
56				
54				
52				
50				
48				
46				
44				
42				
40				
38				
36				
34				
32				
30				
28				
26				
24				
22				
20				
18				
16				
14				
12				
10				
8				
6				
4				
2				

99.06	101.60	80	9-534998-0
(3.000)	(4.000)		
96.52	99.06	78	8-534998-9
(3.800)	(3.800)		
93.98	96.52	76	8-534998-8
(3.700)	(3.800)		
91.44	93.98	74	8-534998-7
(3.600)	(3.700)		
B	A	NO. OF POSN	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		REV	DATE	DESCRIPTION	BY	APP
DRAWING LABEL:		00				
DRAWING NO:		108-25022				
REV:		114-25018				
DATE:		A1 00779				
CUSTOMER DRAWING		TE Connectivity				
RECEPTACLE ASSEMBLY, MOD N,		DOUBLE ROW, DUAL ENTRY, 100K/100CL,				
VERTICAL MOUNT, AMPROOF		DRAWN TO				
SHEET 4.1		PAGE 2 OF 2				