
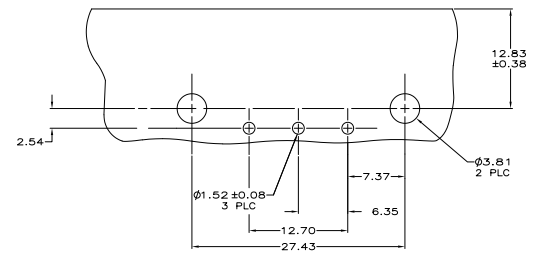
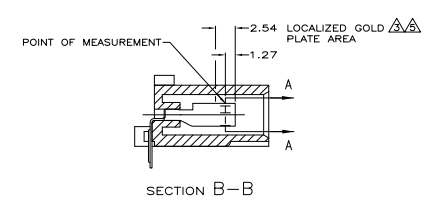


THIS DRAWING IS UNPUBLISHED  
 ALL RIGHTS RESERVED

REV	DATE	DESCRIPTION	BY	CHK	APP
00					
01		REVISED PER ECO-11-004917			

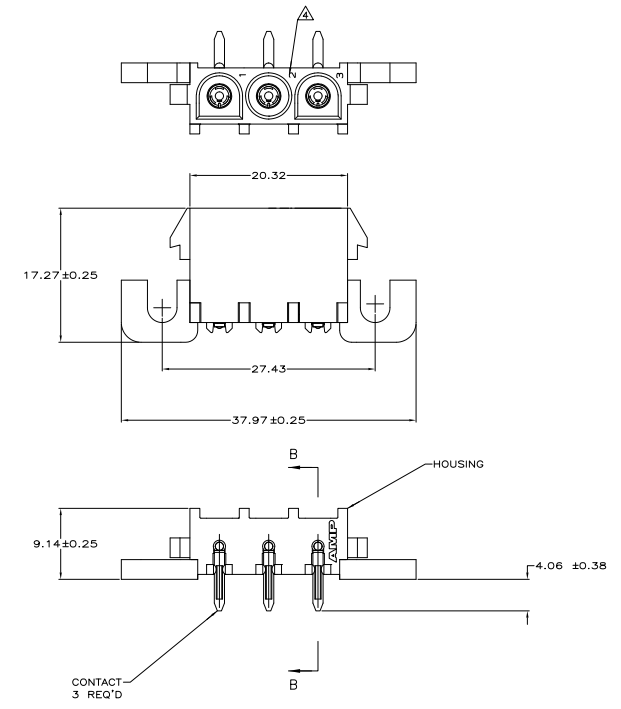

RECOMMENDED MOUNTING HOLE PATTERN  
 FOR 1.57 THICK P.C. BOARD

- PARTS COMPLY WITH AMP SOLDERABILITY SPECIFICATION 109-11-5.
- ▲ 0.00076 GOLD OVER 0.00127 MIN NICKEL WITH MATTE TIN LEAD ON SOLDER TAIL.
  - ▲ CIRCUIT IDENTIFICATION CHARACTERS ARE ADJACENT TO THE INDICATED CAVITIES, BUT LOCATION AND ORIENTATION MAY DIFFER FROM PRINT.
  - ▲ 0.00076 GOLD OVER 0.00127 MIN NICKEL WITH MATTE TIN ON SOLDER TAIL.

MM	IN	MM	IN
2.54	.100		
2.03	.080	37.97	1.495
1.91	.075	27.43	1.080
1.57	.062	20.32	.800
1.52	.060	17.27	.680
1.27	.050	12.83	.505
0.38	.015	12.70	.500
0.25	.010	9.14	.360
0.13	.005	7.37	.290
0.08	.003	6.35	.250
0.00127	0.00050	4.06	.160
0.00076	0.00030	3.81	.150

PH BRZ, ▲	NYLON UL 94V-0	3-643228-0
PH BRZ, ▲	NYLON UL 94V-0	643228-2
PH BRZ, TIN	NYLON UL 94V-0	643228-1
CONTACT	HOUSING	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT. **TE Connectivity**

UNLESS OTHERWISE SPECIFIED:	UNLESS OTHERWISE SPECIFIED:	UNLESS OTHERWISE SPECIFIED:
FINISH: PH	FINISH: PH	FINISH: PH
FINISH: BRZ	FINISH: BRZ	FINISH: BRZ
FINISH: TIN	FINISH: TIN	FINISH: TIN
FINISH: PLATE	FINISH: PLATE	FINISH: PLATE

SOCKET HEADER ASSEMBLY, RIGHT ANGLE MOUNT, 3 POSITION, UNIVERSAL MATE-IN-LOCK™

SIZE: A1 DATE: 00779 DRAWING NO: 643228

CUSTOMER DRAWING

