



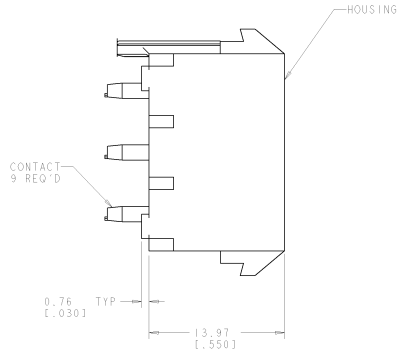



REV	DATE	DESCRIPTION	BY	CHKD	APPD
00					
1		REVISED PER 0638-0276-03	09-08-94	PK	SR
2		REVISED PER 0638-1094-04	09-08-94	PK	SR

- PARTS COMPLY TO AMP SOLDERABILITY SPECIFICATION 109-11-3.
- CIRCUIT IDENTIFICATION CHARACTERS ARE ADJACENT TO THE INDICATED CAVITIES, BUT LOCATION AND ORIENTATION MAY DIFFER FROM PRINT.
- DIMENSIONS IN BRACKETS ARE IN INCHES.
- CONTACT IS STAMPED FROM PRE-PLATED STOCK WHICH IS PLATED OVERALL WITH 0.00127 [.000050] NICKEL; THEN STRIPED WITH 0.0076 [.000030] GOLD IN CONTACT AREA INDICATED AND MATTE TIN LEAD ON SOLDER TAIL END.
- CONTACT IS STAMPED FROM PRE-PLATED STOCK WHICH IS PLATED OVERALL WITH 0.00127 [.000050] NICKEL; THEN STRIPED WITH 0.0076 [.000030] GOLD IN CONTACT AREA INDICATED AND MATTE TIN ON SOLDER TAIL END.

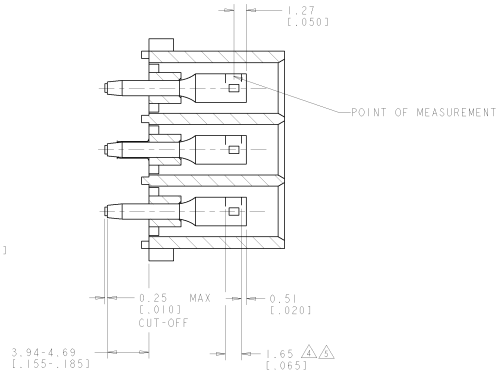

3 DIMENSIONAL MODEL SCALE 4:1

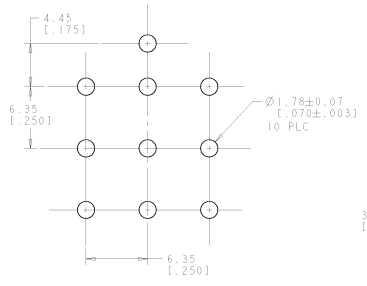

PIN CONTACT MATERIAL AND FINISH	HOUSING MATERIAL	PART NUMBER
PHOSPOR BRONZE, GOLD	NYLON, UL94V-0	643426-3
PHOSPOR BRONZE, GOLD	NYLON, UL94V-0	643426-2
PHOSPOR BRONZE, PRE-TIN	NYLON, UL94V-0	643426-1

RECOMMENDED MOUNTING HOLE PATTERN FOR 1.57 [.062] THICK P.C. BOARD



STANDARD: MIL-STD-883C DIMENSIONS: INCHES: 1 PART: 643426-3 DATE: 09-08-94 BY: PK CHECKED: SR APPROVED: SR	DATE: 09-08-94 BY: PK CHECKED: SR APPROVED: SR	Sigma Electronics Harrisburg, PA 17105-8808 HEADER ASSEMBLY, SOCKET, POLARIZED, 9 CIRCUIT, UNIVERSAL MATE-N-LOK™	PART: 643426-3 REV: A DATE: 09-08-94 BY: PK CHECKED: SR APPROVED: SR
--	---	--	---