




- 1. PARTS COMPLY TO AMP SOLDERABILITY SPECIFICATION 109-11-3.
- △ CONTACT IS PLATED OVERALL WITH 0.00127 [0.00050] NICKEL, THEN 0.00076 [0.00030] GOLD OVER CONTACT LENGTH INDICATED AND MATTE TIN LEAD ON SOLDER TAIL END.
- △ CIRCUIT IDENTIFICATION CHARACTERS ARE ADJACENT TO THE INDICATED CAVITIES, BUT LOCATION AND ORIENTATION MAY DIFFER FROM PRINT.
- 4. DIMENSIONS IN BRACKETS ARE IN INCHES.
- △ CONTACT IS PLATED OVERALL WITH 0.00127 [0.00050] NICKEL, THEN 0.00076 [0.00030] GOLD OVER CONTACT LENGTH INDICATED AND MATTE TIN ON SOLDER TAIL END.

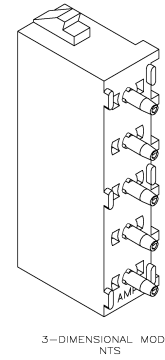

RECOMMENDED MOUNTING HOLE PATTERN FOR 1.57 [.062] THICK P.C. BOARD

PHOSPHOR BRONZE, GOLD △	NYLON,UL94V-0,WHITE	640901-3
PHOSPHOR BRONZE, PRE-TIN △	NYLON,UL94V-0,RED	1-640901-2
PHOSPHOR BRONZE, GOLD △	NYLON,UL94V-0,WHITE	640901-2
PHOSPHOR BRONZE, PRE-TIN △	NYLON,UL94V-0,WHITE	640901-1
CONTACT MATERIAL AND FINISH	HOUSING MATERIAL	PART NUMBER

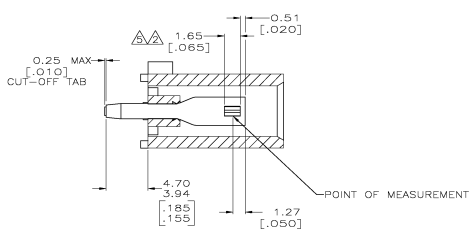

THIS DRAWING IS A CONTROLLED DOCUMENT.		REV. 1	DATE 10-01-88	BY JLENS	10-01-88	AMP	THIS ELECTRONIC CORPORATION Greensboro, NC 27409
UNLESS OTHERWISE SPECIFIED:	UNLESS OTHERWISE SPECIFIED:	REV. 2	DATE 10-01-88	BY SWING	10-01-88	AMP	
1. DIMENSIONS IN INCHES	2. DIMENSIONS IN METERS	REV. 3	DATE 10-01-88	BY TRBALL	10-01-88	AMP	SOCKET HEADER ASSEMBLY, 5 CIRCUIT, UNIVERSAL MATE-N-LOCK™
Ø DIA	R RADIUS	REV. 4	DATE 11-14-89	BY			
D DIA	Ø DIA (FRA)	REV. 5	DATE 11-14-89	BY			
PL THICKNESS	PL THICKNESS	REV. 6	DATE 11-14-89	BY			
WEIGHT	WEIGHT	REV. 7	DATE 11-14-89	BY			
SEE TABLE	SEE TABLE	REV. 8	DATE 11-14-89	BY			
CUSTOMER DRAWING	A100778	REV. 9	DATE 11-14-89	BY			
	Q=640901	REV. 10	DATE 11-14-89	BY			
		REV. 11	DATE 11-14-89	BY			