
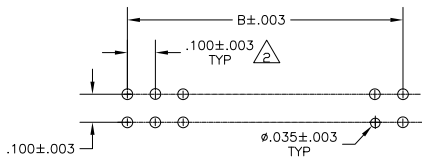

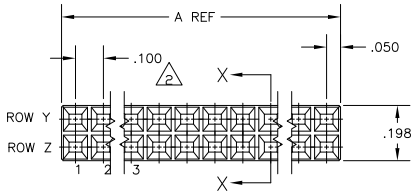


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	BY	APPD
F	EC	063C 0745 04	10JAN05	BSV	JRO
F1	ECO-09-020932		26AUG09	KK	AEG

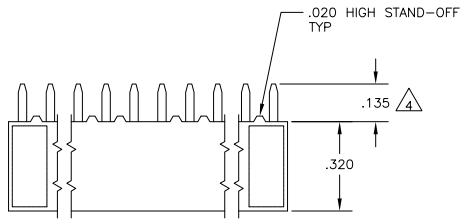

RECOMMENDED HOLE LAYOUT

- △ PART NUMBER AND DATE CODE MARKED IN APPROXIMATE LOCATION SHOWN
- △ CONTACT: DUPLEX PLATED: .000010 GOLD ON CONTACT AREA, .000150-.000300 BRIGHT TIN-LEAD ON SOLDER LEADS, ALL OVER .000050 MINIMUM NICKEL.
- 3. TOLERANCE IS NON-CUMULATIVE.
- △ POINT OF MEASUREMENT FOR PLATING THICKNESS (MEASURED INSIDE CONTACT BEAMS)
- △ POINT OF CONTACT MEASUREMENT.
- 6. MATERIAL: HOUSING: GLASS FILLED POLYESTER-COLOR: BLACK
CONTACT: PHOSPHOR BRONZE
- △ CONTACT: DUPLEX PLATED: .000010 GOLD ON CONTACT AREA, .000150-.000300 MATTE TIN ON SOLDER LEADS, ALL OVER .000050 MINIMUM NICKEL.
- △ ROHS 2002/95/EC COMPLIANT
- △ TYCO LOGO AND CSA LOGO ARE MOLDED INTO HOUSING, THIS LOCATION.
- △ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

OBSOLETE	52	1,2,29&30	1,2,29&30	△7	3.000	2.900	60	5-102766-4	
	44	1,2,25&26	1,2,25&26	△7	2.600	2.500	52	5-102766-3	
	30	1,2,18&19	1,2,18&19	△7	1.900	1.800	38	5-102766-2	
△8	40	1,2,23&24	1,2,23&24	△7	2.400	2.300	48	5-102766-1	
OBSOLETE	52	1,2,29&30	1,2,29&30	△8	3.000	2.900	60	102766-4	
	44	1,2,25&26	1,2,25&26	△8	2.600	2.500	52	102766-3	
	30	1,2,18&19	1,2,18&19	△8	1.900	1.800	38	102766-2	
△10 SUPERCEDED	40	1,2,23&24	1,2,23&24	△8	2.400	2.300	48	102766-1	
NO ACTIVE POS	ROW Y		ROW Z		FINISH	A	B	NO OF POSN	PART NO
	CONTACTS OMITTED								

THIS DRAWING IS A CONTROLLED DOCUMENT.		DATE	14-5-81	Tyco Electronics Corporation Harrisburg, Pa 17105-3608
DIMENSIONS: INCHES		OK	15-5-81	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	20-5-81	CONNECTOR ASSY., MOD II/IV DOUBLE ROW, .100 X .100 C/L, VERTICAL MOUNTED
0 PLG ± .005		PRODUCT SPEC		
1 PLG ± .005		APPLICATION SPEC		SIZE
2 PLG ± .005		FINISH		CAGE CODE
3 PLG ± .005		CONTACTS: SEE TABLE		DRAWING NO
4 PLG ± .005				A200779
5 PLG ± .005				SCALE
6 PLG ± .005				4:1
ANGLES ± .005				SHEET
				1 OF 1
				REV
				F1