


- Headers (350 & 450) use MM# 3404 pins. See page 179 for details.
- Sockets (310 & 410) use MM# 1005 receptacles and accept pin diameters from .015-.025. See page 137 for details.
- Coplanarity .005" (Single Row max 10 pins; Double Row max 20 pins). For higher pin counts contact technical support.
- Insulators are high temp. thermoplastic.

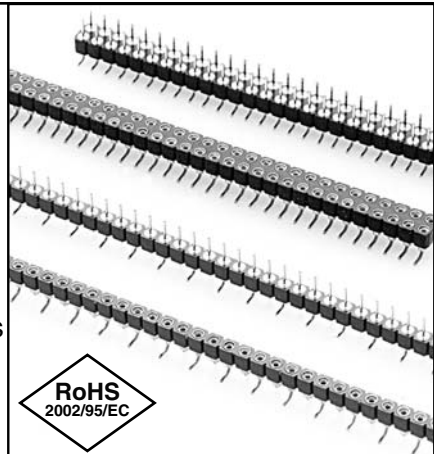

For RoHS compliance select plating code.

**Ordering Information**

<b>Fig. 1L</b>	<b>Single Row Header, Left Hand Footprint</b> Odd or Even # of pins			
	350-XX-1_ _ -00-106000		Specify # of pins  02-64	
<b>Fig. 1R</b>	<b>Single Row Header, Right Hand Footprint</b> Even # of pins			
	350-XX-1_ _ -00-107000		Specify even # of pins  02-64	
<b>Fig. 2</b>	<b>Double Row Header, Even # of pins</b>			
	450-XX-2_ _ -00-106000		Specify even # of pins  04-72	
SPECIFY PLATING CODE XX=		10	90	40
Pin Plating		10µ" Au	200µ" Sn/Pb	200µ" Sn
<b>Fig. 3L</b>	<b>Single Row Socket, Left Hand Footprint</b> Odd or Even # of pins			
	310-43-1_ _ -41-105000		Specify # of pins  02-64	
<b>Fig. 3R</b>	<b>Single Row Socket, Right Hand Footprint</b> Even # of pins			
	310-43-1_ _ -41-107000		Specify even # of pins  02-64	
<b>Fig. 4</b>	<b>Double Row Socket, Even # of pins</b>			
	410-43-2_ _ -41-105000		Specify even # of pins  04-72	
PLATING CODE =				43
Sleeve (Pin)				200µ" Sn
Contact (Clip)				30µ" Au