


- Headers (350 & 450) use MM# 3404 pins. See page 179 for details.
- Sockets (310 & 410) use MM# 1005 receptacles and accept pin diameters from 0,38-0,64. See page 137 for details.
- Coplanarity 0,13 (Single Row max 10 pins; Double Row max 20 pins). For higher pin counts contact technical support.
- Insulators are high temp. thermoplastic.

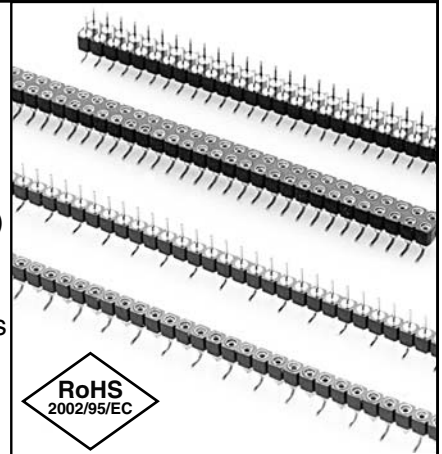

For RoHS compliance select \diamond plating code.

Ordering Information

Fig. 1L	Single Row Header, Left Hand Footprint Odd or Even # of pins	350-XX-1__-00-106000		
	Specify # of pins	02-64		
Fig. 1R	Single Row Header, Right Hand Footprint Even # of pins	350-XX-1__-00-107000		
	Specify even # of pins	02-64		
Fig. 2	Double Row Header, Even # of pins	450-XX-2__-00-106000		
	Specify even # of pins	04-72		
SPECIFY PLATING CODE XX=		10 \diamond	90	40 \diamond
Pin Plating		0,25 μ m Au	5,08 μ m Sn/Pb	5,08 μ m Sn
Fig. 3L	Single Row Socket, Left Hand Footprint Odd or Even # of pins	310-43-1__-41-105000		
	Specify # of pins	02-64		
Fig. 3R	Single Row Socket, Right Hand Footprint Even # of pins	310-43-1__-41-107000		
	Specify even # of pins	02-64		
Fig. 4	Double Row Socket, Even # of pins	410-43-2__-41-105000		
	Specify even # of pins	04-72		
PLATING CODE =				43 \diamond
Sleeve (Pin)				5,08 μ m Sn
Contact (Clip)				0,76 μ m Au