

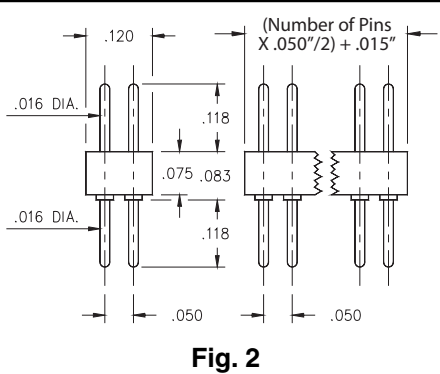


- Series 850 single and double row interconnects have .050" pin spacing & permit board stacking as low as .248".
- Pin headers have .016" dia. pins ( MM #4006-0 ). See page 175 for details.
- MM #0467 and MM #4890 receptacles use Hi-Rel, 3-finger BeCu #11 contacts rated at 3 amps. ( #11 contact accepts pin diameters from .015"-.020" ). See pages 129 and 131 for details.
- Insulators are high temp. thermoplastic, suitable for all soldering operations.

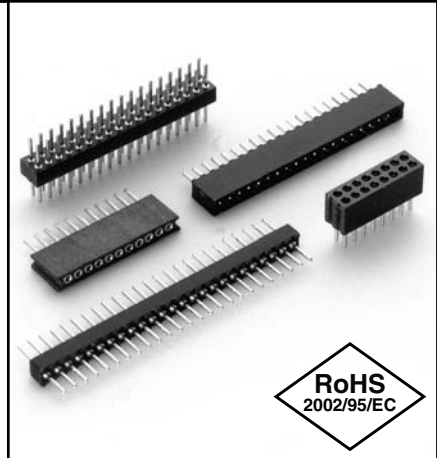

**Ordering Information**

<b>Fig. 1</b>	<b>Single Row</b>	<b>.087" Profile Pin Header</b>
	850-XX-0__-10-001000	
	<b>Specify # of pins</b>	01-50
<b>Fig. 2</b>	<b>Double Row</b>	<b>.075" Profile Pin Header</b>
	852-XX-__-10-001000	
	<b>Specify # of pins</b>	002-100

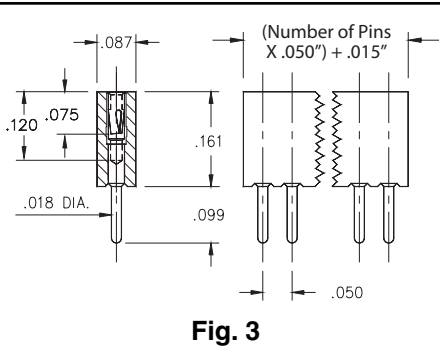


*For Electrical,  
Mechanical & Environmental  
Data, See pg. 4*


**XX=Plating Code  
See Below**

*For RoHS compliance  
select ◇ plating code.*

SPECIFY PLATING CODE XX=	<b>10</b> ◇	<b>90</b>	<b>40</b> ◇	
Pin Plating	10μ" Au	200μ" Sn/Pb	200μ" Sn	

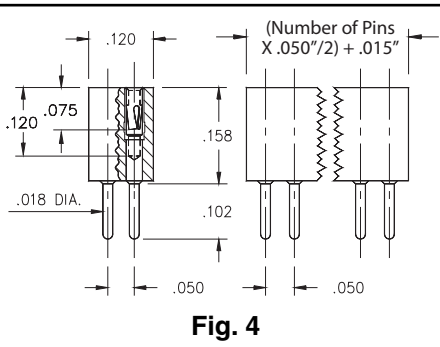

<b>Fig. 3</b>	<b>Single Row</b>	<b>.161" Profile Socket</b>
	851-XX-0__-10-001000	
	<b>Specify # of pins</b>	01-50
<b>Fig. 4</b>	<b>Double Row</b>	<b>.161" Profile Socket</b>
	853-XX-__-10-001000	
	<b>Specify # of pins</b>	002-100

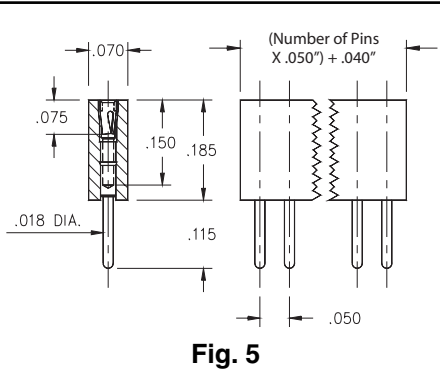

<b>Fig. 5</b>	<b>Single Row</b>	<b>.185" Profile Socket</b>
	851-XX-0__-10-002000	
	<b>Specify # of pins</b>	01-77

*For Electrical,  
Mechanical & Environmental  
Data, See pg. 4*

**XX=Plating Code  
See Below**

*For RoHS compliance  
select ◇ plating code.*

SPECIFY PLATING CODE XX=		<b>93</b>	<b>99</b>	<b>43</b> ◇	
Sleeve (Pin)		200μ" Sn/Pb	200μ" Sn/Pb	200μ" Sn	
Contact (Clip)		30μ" Au	200μ" Sn/Pb	30μ" Au	