


- Headers (830 & 832) use MM# 6218 pins. See page 175 for details.
- Sockets (831 & 833) use MM# 1802 receptacles and accept pin diameters from .015-.025. See page 140 for details.
- Coplanarity .005" (Single Row max 12 pins; Double Row max 24 pins) for higher pin counts contact technical support.
- Insulators are high temp. thermoplastic.

For RoHS compliance
select ◇ plating code.

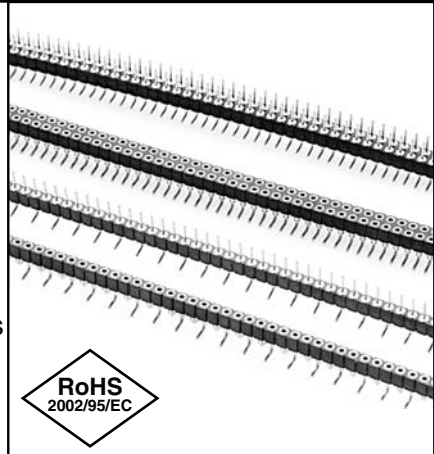

Ordering Information				
Fig. 1L	Single Row Header, Left Hand Footprint Odd or Even # of pins			
	830-XX-0__-30-001000			
	Specify # of pins	→ 01-50		
Fig. 1R	Single Row Header, Right Hand Footprint Even # of pins			
	830-XX-0__-30-002000			
	Specify even # of pins	→ 02-50		
Fig. 2	Double Row Header, Even # of pins			
	832-XX-__-30-001000			
	Specify even # of pins	→ 004-100		
SPECIFY PLATING CODE XX=		10◇	90	40◇
Pin Plating		10μ" Au	200μ" Sn/Pb	200μ" Sn
Fig. 3L	Single Row Socket, Left Hand Footprint Odd or Even # of pins			
	831-XX-0__-30-001000			
	Specify # of pins	→ 01-50		
Fig. 3R	Single Row Socket, Right Hand Footprint Even # of pins			
	831-XX-0__-30-002000			
	Specify even # of pins	→ 02-50		
Fig. 4	Double Row Socket, Even # of pins			
	833-XX-__-30-001000			
	Specify even # of pins	→ 004-100		
SPECIFY PLATING CODE XX=		93	43◇	
Sleeve (Pin)		200μ" Sn/Pb	200μ" Sn	
Contact (Clip)		30μ" Au	30μ" Au	