

Fig. 1

- Series 850 and 851 interconnects are available in single and double row form.
- 850 & 852 series headers use MM #4006-1 and #4006-2 pins. See page 175 details.
- 851 & 853 series sockets use MM #4890-1 and #4890-2 receptacles, that accept pin diameters from 0,38 - 0,53 See page 131 for details.
- Insulators are high temp. thermoplastic.

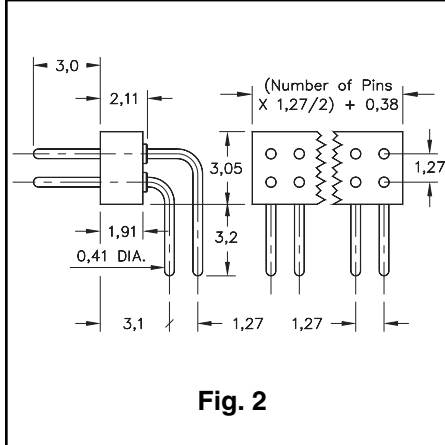
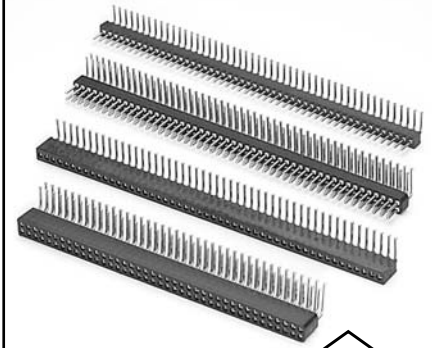


Fig. 2

Ordering Information							
Fig. 1	<table border="0" style="width: 100%;"> <tr> <td style="width: 50%;">Single Row</td> <td style="width: 50%;">Right Angle Pin Header</td> </tr> <tr> <td style="text-align: center;">850-XX-0__-20-001000</td> <td></td> </tr> <tr> <td style="text-align: center;">Specify # of pins</td> <td style="text-align: center;">└───> 01-50</td> </tr> </table>	Single Row	Right Angle Pin Header	850-XX-0__-20-001000		Specify # of pins	└───> 01-50
	Single Row	Right Angle Pin Header					
850-XX-0__-20-001000							
Specify # of pins	└───> 01-50						
Fig. 2	<table border="0" style="width: 100%;"> <tr> <td style="width: 50%;">Double Row</td> <td style="width: 50%;">Right Angle Pin Header</td> </tr> <tr> <td style="text-align: center;">852-XX-__-20-001000</td> <td></td> </tr> <tr> <td style="text-align: center;">Specify # of pins</td> <td style="text-align: center;">└───> 002-100</td> </tr> </table>	Double Row	Right Angle Pin Header	852-XX-__-20-001000		Specify # of pins	└───> 002-100
	Double Row	Right Angle Pin Header					
852-XX-__-20-001000							
Specify # of pins	└───> 002-100						

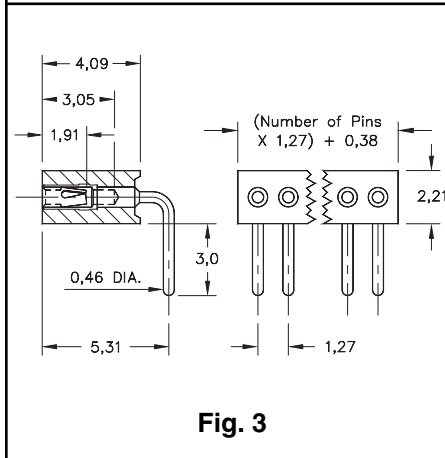


Fig. 3

<div style="border: 1px solid black; border-radius: 50%; padding: 5px; display: inline-block;"> <i>For Electrical, Mechanical & Environmental Data, See pg. 4</i> </div>	<div style="border: 1px solid black; border-radius: 50%; padding: 5px; display: inline-block;"> XX=Plating Code See Below </div>	<div style="border: 1px solid green; border-radius: 5px; padding: 5px; display: inline-block;"> <i>For RoHS compliance select ◇ plating code.</i> </div>		
SPECIFY PLATING CODE XX=	10◇	90	40◇	
Pin Plating	0,25µm Au	5,08µm Sn/Pb	5,08µm Sn	

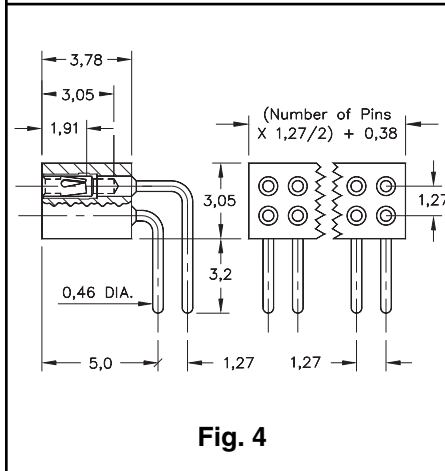


Fig. 4

Fig. 3	<table border="0" style="width: 100%;"> <tr> <td style="width: 50%;">Single Row</td> <td style="width: 50%;">Right Angle Socket</td> </tr> <tr> <td style="text-align: center;">851-XX-0__-20-001000</td> <td></td> </tr> <tr> <td style="text-align: center;">Specify # of pins</td> <td style="text-align: center;">└───> 01-50</td> </tr> </table>	Single Row	Right Angle Socket	851-XX-0__-20-001000		Specify # of pins	└───> 01-50
	Single Row	Right Angle Socket					
851-XX-0__-20-001000							
Specify # of pins	└───> 01-50						
Fig. 4	<table border="0" style="width: 100%;"> <tr> <td style="width: 50%;">Double Row</td> <td style="width: 50%;">Right Angle Socket</td> </tr> <tr> <td style="text-align: center;">853-XX-__-20-001000</td> <td></td> </tr> <tr> <td style="text-align: center;">Specify # of pins</td> <td style="text-align: center;">└───> 002-100</td> </tr> </table>	Double Row	Right Angle Socket	853-XX-__-20-001000		Specify # of pins	└───> 002-100
	Double Row	Right Angle Socket					
853-XX-__-20-001000							
Specify # of pins	└───> 002-100						

<div style="border: 1px solid black; border-radius: 50%; padding: 5px; display: inline-block;"> <i>For Electrical, Mechanical & Environmental Data, See pg. 4</i> </div>	<div style="border: 1px solid black; border-radius: 50%; padding: 5px; display: inline-block;"> XX=Plating Code See Below </div>	<div style="border: 1px solid green; border-radius: 5px; padding: 5px; display: inline-block;"> <i>For RoHS compliance select ◇ plating code.</i> </div>				
SPECIFY PLATING CODE XX=		93	99		43◇	
Sleeve (Pin)		5,08µm Sn/Pb	5,08µm Sn/Pb		5,08µm Sn	
Contact (Clip)		0,76µm Au	5,08µm Sn/Pb		0,76µm Au	