


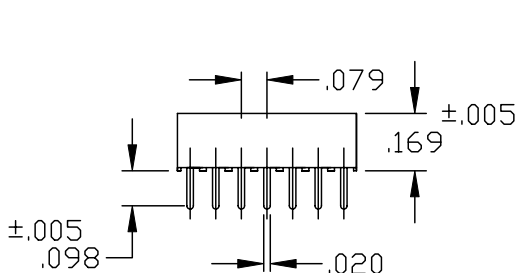


DESCRIPTION: 2MM SINGLE ROW RECEPTACLE

MATERIAL:  
 HOUSING: NYLON 6T (UL 94V-0) BLACK  
 CONTACT: PHOSPHOR BRONZE  
 PLATING: GOLD FLASH ENTIRE CONTACT  
 RoHS COMPLIANT

ELECTRICAL:  
 CURRENT RATING: 1 AMP  
 CONTACT RESISTANCE: 20 mΩ MAX.  
 INSULATOR RESISTANCE: 5000 MEGOHMS MIN.  
 DwV: 500V AC  
 OPERATING TEMP:  
 -40°C TO +105°C  
 PROCESS TEMP.: 260°C FOR 10 SECONDS

"L" = NO. OF CONTACTS PER ROW X .079




**2563 YY 01RP2**

SERIES \_\_\_\_\_  
 2563 = SINGLE ROW

POSITIONS \_\_\_\_\_  
 SINGLE - INCREMENTS OF 1  
 (03 TO 40)

TYPE: \_\_\_\_\_  
 01 = STRAIGHT

PLATING: \_\_\_\_\_  
 P2 = GOLD FLASH

 <b>NorComp</b>	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.		DRAWN: PAM JENKINS	DATE: 1-30-06
			CHECKED:	DATE:
		SCALE: NTS	SHEET 1	OF 1
		REV 1		
		DWG NO. <b>2563YY01RP2</b>		