


No. of Contacts	DIMENSIONS	
	A	B
24	10.00	12.40
28	12.00	14.40
32	14.00	16.40
36	16.00	18.40
40	18.00	20.40
44	20.00	22.40
48	22.00	24.40
52	24.00	26.40
56	26.00	28.40
60	28.00	30.40
64	30.00	32.40
68	32.00	34.40
72	34.00	36.40
76	36.00	38.40
80	38.00	40.40
84	40.00	42.40
88	42.00	44.40
92	44.00	46.40
96	46.00	48.40
100	48.00	50.40
104	50.00	52.40
108	52.00	54.40
112	54.00	56.40
116	56.00	58.40
120	58.00	60.40

SPECIFICATIONS

Current Rating: 1 Amp
 Insulator Resistance: 5000 Mega Ohms min.
 Contact Resistance: 20 milli Ohm Max.
 Dielectric Withstanding: 500 VAC
 Operating Temperature: -40 Degrees C. to +105 Degrees C.
 Max. Processing Temp: 230 Degrees C. for 30-60 seconds
 (260 Degree C. for 10 seconds)

Contact Material: Phosphor Bronze.
 Insulator Material: Polyester, UL 94V-0
 © Standard: Nylon-6T

Contact Finish: Selective Plating, Gold/Tin

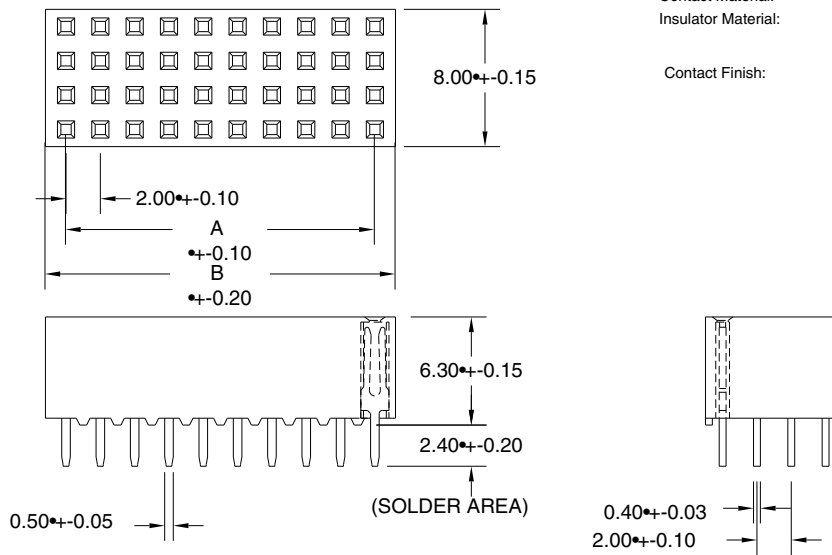

SULLINS

801 E. MISSION RD.
 SAN MARCOS, CA 92069

GENERAL TOLERANCE	
XX. +/-	XXX. +/-
X. +/- 0.20	.XXX +/-
.X +/- 0.10	X.B +/-
.XX +/- 0.05	.X.B +/-

SCALE	3:1
UNIT	mm
SIZE	A4

DRAWN
 CHECK
 APPROVE

DATE
 DATE
 DATE

DWG. NO. T0025
 PARTS NO. PPRNXX4EFCN

TITLE

REV.

SHEET