


|  | NO. | BESCHREIBUNG / DESCRIPTION          |
|--|-----|-------------------------------------|
|  | 1   | ISOLIERKÖRPER STIFT / INSULATOR PIN |
|  | 5   | KONTAKTSTIFT/ CONTACT PIN           |
|  | 8   | DOSENGEHÄUSE / SHELL                |



| NO. | MASSE / DIMENSIO |
|-----|------------------|
| А   | 7/8-20UNEF-2A    |
| в   | 14.2             |
| с   | 3.2              |
| D   | 25.1             |
| Е   | 19               |
| F   | 23               |
| G   | 30               |
| н   | 3.1              |

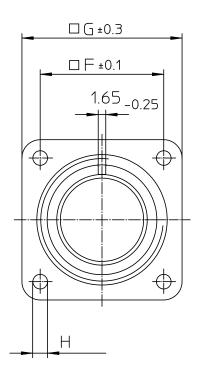

| Note: Due to an automatic nomenclature system, numbers generated<br>may not be sequential.                      | all dimensions are in mm<br>Dimensions without tolerance indications are general tolerances in acc. with DIN7168m                                                             |                                  | drawing for |
|-----------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------|-------------|
| Notiz: Durch ein automatisches Benennungssystem können<br>Nummerierungen entstehen, die nicht fortlaufend sind. |                                                                                                                                                                               |                                  | CUSTOMER    |
| Nummenerungen entstenen, die nicht fordaulend sind.                                                             | 🔷 ітт                                                                                                                                                                         | description CA3102E14S-6P-F      | -80         |
| Material Specification:                                                                                         |                                                                                                                                                                               | Box mounting receptacle          |             |
| Shell Material: Aluminium alloy                                                                                 |                                                                                                                                                                               |                                  |             |
| Shell Plating: Olive drab chromate coating over cadmium plating                                                 |                                                                                                                                                                               | ANNO October ( Dis ( ) and 140.0 |             |
| Insulator Material: Neoprene                                                                                    | AWG Crimp / Pin / Layout: 14S-6                                                                                                                                               |                                  |             |
| Contact Material: Copper alloy                                                                                  | © All rights reserved. Reproduction or issue to third in any form and the page revision whatever is only penalted with written authorization of ITT Cannon 11/1 302.8. Feb 11 |                                  | ion         |
| Contact Plating: Hard silver                                                                                    |                                                                                                                                                                               |                                  | 3. Feb 11   |