


	NO.	BESCHREIBUNG / DESCRIPTION
	1	ISOLIERKÖRPER STIFT / INSULATOR PIN
	5	KONTAKTSTIFT/ CONTACT PIN
	8	DOSENGEHÄUSE / SHELL

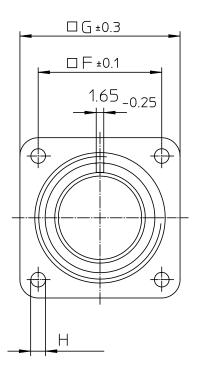

NO.	MASSE / DIMENSIO
А	7/8-20UNEF-2A
в	14.2
с	3.2
D	25.1
Е	19
F	23
G	30
н	3.1

F	Â	в
Ĕ	D	Č
		-

Note: Due to an automatic nomenclature system, numbers generated may not be sequential.   Notiz: Durch ein automatisches Benennungssystem können Nummeriennen entstehen, die nicht fortlaufend sind.		oll dimensions are in mm Dimensions without tolerance indications are general tolerances in acc. with DIN7168m			drawing for
					CUSTOMER
Nummenerungen entstehen, die nicht fortlaurend sind.		<u>&gt;&gt;</u>	description CA3102E1	4S-6F	5
Material Specification:		🗌 💙 ІТТ 🗆	Box mounting receptacle		
Shell Material: Aluminium alloy			2 of the data ing to copilate to		
Shell Plating: Olive drab chromate coating over cadmiun	n plating	g Engineered for life	0.14.0 0 (B) (1		
Insulator Material: Neoprene		ITT CANNON GmbH D - 71384 Weinstadt/Germany	Solder Cup / Pin / Layout:		
Contact Material: Copper alloy		© All rights reserved. Reproduction or issue to third in any form under the served in the served of			vision
Contact Plating: Hard silver		whatever is only penilited with written authorization of ITT Cormon U 1/1 302.8			2 8. Feb 11