


| NO. | BESCHREIBUNG / DESCRIPTION |
|-----|---|
| 2 | ISOLIERKÖRPER BUCHSE / INSULATOR SOCKET |
| 6 | KONTAKTBUCHSE / CONTACT SOCKET |
| 8 | DOSENGEHÄUSE / SHELL |



| NO. | MASSE / DIMENSIO |
|-----|------------------|
| А | 7/8-20UNEF-2A |
| в | 14.2 |
| с | 3.2 |
| D | 25.1 |
| Е | 19 |
| F | 23 |
| G | 30 |
| н | 3.1 |

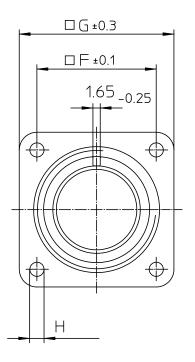

| Note: Due to an automatic nomenclature system, numbers generated may not be sequential. | all dimensions are in mn Dimensions without tolerance indications are general tolerances in acc. with DIN7168m | | drawing for |
|--|---|-------------------------------------|-------------|
| Notiz: Durch ein automatisches Benennungssystem können | | | CUSTOMER |
| Nummerierungen entstehen, die nicht fortlaufend sind. | × 1 | description CA3102E14S-6S | |
| Material Specification: | 💛 ודד | Box mounting receptacle | |
| Shell Material: Aluminium alloy | | box mounting receptuole | |
| Shell Plating: Olive drab chromate coating over cadmium plating | Engineered for life | Oaldas Over (Oaldast (Lavauts 110 | C . |
| Insulator Material: Neoprene | TT CANNON Grith D - 71384 Weinstell/Germany Solder Cup / Socket / Layout: | | -0 |
| Contact Material: Copper alloy | © All rights reserved. Reproduction or issue to third in any form page page revision whatever is any penaltied with written authorization of ITT Carmon 11/1 302 8. Feb 11 | | |
| Contact Plating: Hard silver | | | 3. Feb 11 |
| | | | |