

4


3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
GP	00	D PER ECR-06-013851	8JUN06	WW	SH

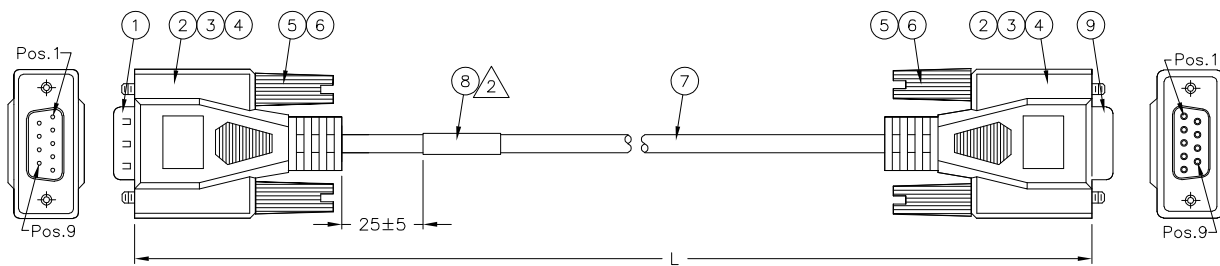

PIN ASSIGNMENT :

DB9 F.	1	2	3	4	5	6	7	8	9	Shell
										Drain
DB9 M.	1	2	3	4	5	6	7	8	9	Shell

621808-2	120.0 ^{+5.00} / _{-2.00}	10	2 OHM MAX
621808-1	72.0 ^{+5.00} / _{-2.00}	6	1 OHM MAX
TYCO P/N	"L" LENGTH	LABEL XX'	CONTINUITY RESISTANCE

NOTES:

1. PACKAGED IN CTG STANDARD PRINTED ZIPLOCK POLYBAG.

2. LABEL INFORMATION AS FOLLOWS:

621808-XX
1938943000A

3. TEST REQUIREMENT:

CONTINUITY RESISTANCE: SEE TABLE.
 INSULATION RESISTANCE: 50 M ohm MIN.
 HI-POT TEST: DC 300V/0.01 Sec MIN.

4. PRODUCT AND PROCESSING MUST MEET REQUIREMENTS OF TYCO ENVIRONMENTAL STANDARD 230-702.

1	PC	DB9 FEMALE, SOLDER TYPE, CONTACT: GOLD FLASH, SHELL: NICKEL PLATED, INSULATION COLOR: BLACK. RoHS.	9
1	PC	LABEL, SIZE: 25.0*35.0MM, WHITE: 25.0*13.0MM.	8
AR	MR	UL2464 9C*28AWG+AL/FOIL+DRAIN, COLOR: BEIGE.	7
2	PC	#4-40 THUMBSCREW.	6
AR	KG	MOLDED PVC, 30P, COLOR: BEIGE.(BG01).	5
AR	MR	HEAT SHRINK TUBING, 1.5MM, COLOR: BLACK.	4
AR	KG	OVER MOLD PVC, 40P, COLOR: BEIGE.(BG01).	3
AR	KG	INNER MOLD PE	2
1	PC	DB9 MALE, SOLDER TYPE, CONTACT: GOLD FLASH, SHELL: NICKEL PLATED, INSULATION COLOR: BLACK. RoHS.	1

THIS DRAWING IS A CONTROLLED DOCUMENT.		11-19-96		Tyco Electronics Corporation	
DWN	D. EISENTRAUT	CHK	8JUN06	Harrisburg, Pa 17105-3608	
APVD	STEVEN ZHOU	NAME	SINGOL HE		
PRODUCT SPEC	CABLE ASSY, DB9 FEMALE TO MALE, OVERMOLDED				
APPLICATION SPEC	-				
WEIGHT	A3 00779		DRAWING NO	C-621808	
CUSTOMER DRAWING	SCALE	1:1	SHEET	1 OF 1	REV D