


SACC-5P-DSI-M12MS/FS-M16

Order No.: 1551671



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1551671>

Sensor/actuator control cabinet feed-through, male to female, 5-pos., M12, shielded, A-coded, bipolar/screw mounting with M16 thread

| Commercial data | |
|--------------------------|--|
| GTIN (EAN) |  4 046356 156226 |
| sales group | D125 |
| Pack | 1 pcs. |
| Customs tariff | 85366990 |
| Catalog page information | Page 38 (PC-2009) |

Product notes

WEEE/RoHS-compliant since:
09/07/2006



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

| General data | |
|-----------------------|----------|
| Rated current at 40°C | 4 A |
| Rated voltage | 24 V |
| Number of positions | 5 |
| Volume resistance | ≤ 3 mΩ |
| Insulation resistance | ≥ 100 MΩ |


| | |
|---------------------------------|--|
| Ambient temperature (operation) | -25 °C ... 85 °C (Male connector / female connector) |
|---------------------------------|--|

General characteristics


| | |
|--------------------------|-------------------------------|
| Standards/regulations | M12 connector IEC 61076-2-101 |
| Coding | A - standard |
| Degree of protection | IP67 |
| Contact material | CuZn |
| Contact surface material | Au |
| Contact carrier material | PA 66 |
| Material, knurls | Nickel-plated brass |
| Sealing material | NBR |
| Mounting type | Bipolar mounting M16 x 1.5 |
| Status display | No |

Diagrams/Drawings


Dimensioned drawing

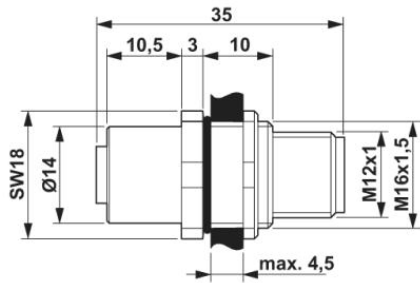

Schematic diagram

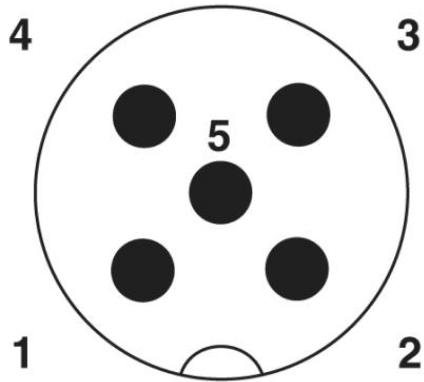

Pin assignment M12 male connector, 5-pos., A-coded, male side

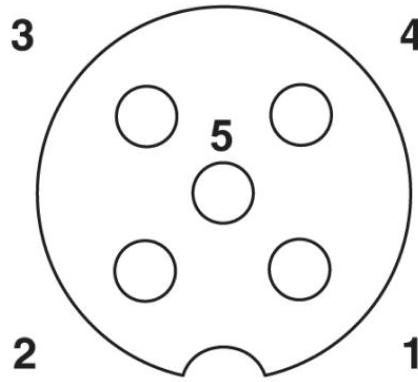

Pin assignment M12 socket, 5-pos., A-coded, socket side view

Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057, USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>



© 2010 Phoenix Contact
Technical modifications reserved;