

MHz RANGE CRYSTAL UNIT ULTRA MINIATURE SIZE LOW PROFILE SMD

FA-128

- Nominal frequency range : 24 MHz to 54 MHz
- External dimensions : 2.0 × 1.6 × 0.5 t (mm)
- Overtone order : Fundamental
- Applications : Mobile phone, Bluetooth, W-LAN
ISM band radio, Clock for MPU



Product Number (please contact us)
Q22FA1280xxxx00



Actual size



Specifications (characteristics)


Item	Symbol	Specifications		Remarks
		For RF Reference	For Clock	
Nominal frequency range	f_nom	24.000 MHz to 54.000 MHz		Fundamental Please contact us for inquiries regarding the available frequencies.
Storage temperature range	T_stg	-40 °C to +125 °C		Store as bare product after unpacking
Operating temperature range	T_use	-40 °C to +85 °C		
Level of drive	DL	100 μW Max.	200 μW Max.	Recommended: 1 to 100 μW
Frequency tolerance (standard)	f_tol	±10 × 10 ⁻⁶	±30 × 10 ⁻⁶	+25 °C For the out of standard specifications, please contact us for inquiries.
Frequency versus temperature characteristics (standard)	f_tem	±10 × 10 ⁻⁶	±30 × 10 ⁻⁶	-20 °C to +75 °C For the out of standard specifications, please contact us for inquiries.
Load capacitance	CL	6 pF to ∞		Please specify.
Motional resistance (ESR)	R1	As per below table		-20 °C to +75 °C
Frequency aging	f_age	±1 × 10 ⁻⁶ / year Max.	±5 × 10 ⁻⁶ / year Max.	+25 °C, First year

Motional resistance (ESR)

Frequency	Motional resistance
24.0 MHz ≤ f_nom < 26.0 MHz	80 Ω Max.
26.0 MHz ≤ f_nom ≤ 54.0 MHz	60 Ω Max.

External dimensions

(Unit:mm)

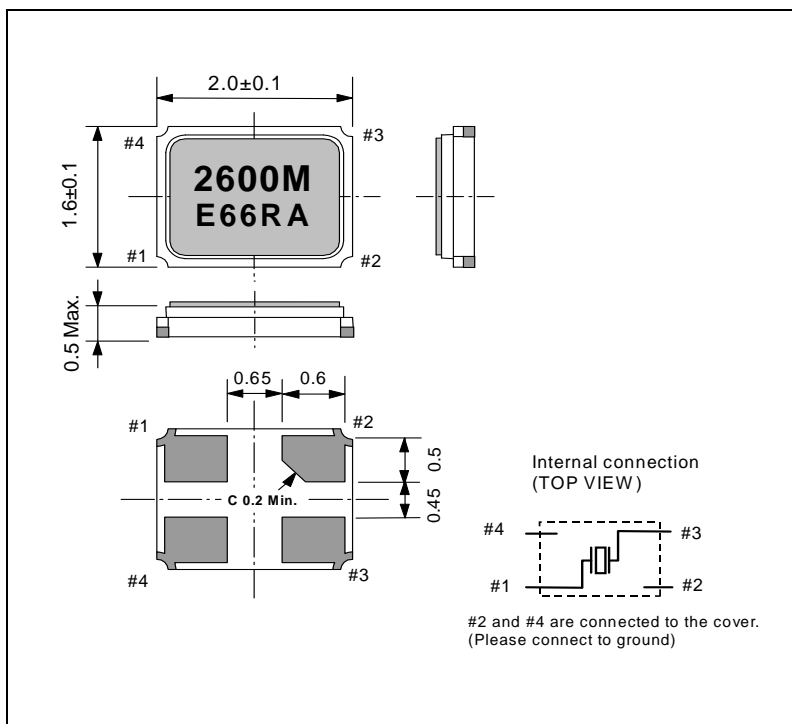

Footprint (Recommended)

(Unit:mm)

