

3-terminal Filters(SMD Array)

Conformity to RoHS Directive

Supports Digital Broadcasting Signals and Foreign DVB-H

MEA Series MEA1210PE Type

FEATURES

- 2-line LC filter are built in one chip for high-density circuit design.
- 0.5mm low profile.
- It is effective as a sensitivity suppression technique for mobile phones.
- This product is suitable for the LCD signal lines in mobile phone.

TEMPERATURE RANGES

Operating	-40 to +85°C
-----------	--------------

PRODUCT IDENTIFICATION


MEA	1210	P	E220	T
(1)	(2)	(3)	(4)	(5)

- | | |
|------------------------|-----------------------------|
| (1)Series name | (4)Capacitance (pF) |
| (2)Dimensions L×W | E220: 22pF |
| (3) π type circuit | (5)Packaging style T:Taping |



PACKAGING STYLE AND QUANTITIES

Packaging style	Quantity
Taping	4000 pieces/reel

SHAPES AND DIMENSIONS/CIRCUIT DIAGRAM/RECOMMENDED PC BOARD PATTERN (REFLOW)

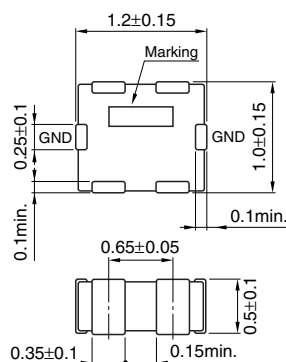

Weight: 3.5mg
Dimensions in mm

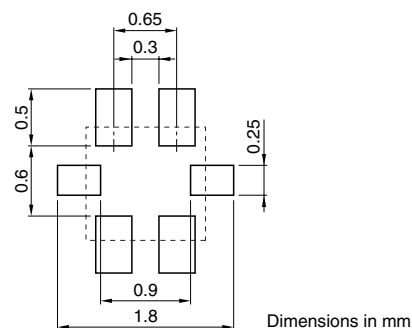

Dimensions in mm


ELECTRICAL CHARACTERISTICS

Part No.	Rated voltage (V)max.	Rated current (mA)max.	Capacitance (pF)	Attenuation(dB)typ. [470MHz to 2GHz]
MEA1210PE220	6.3	100	22	20
MEA1210PE360	6.3	100	36	20
MEA1210PE400	6.3	100	40	20


- Conformity to RoHS Directive: This means that, in conformity with EU Directive 2002/95/EC, lead, cadmium, mercury, hexavalent chromium, and specific bromine-based flame retardants, PBB and PBDE, have not been used, except for exempted applications.
- Please contact our Sales office when your application are considered the following:
The device's failure or malfunction may directly endanger human life (e.g. application for automobile/aircraft/medical/nuclear power devices, etc.)

• All specifications are subject to change without notice.

TYPICAL ELECTRICAL CHARACTERISTICS ATTENUATION vs. FREQUENCY CHARACTERISTICS

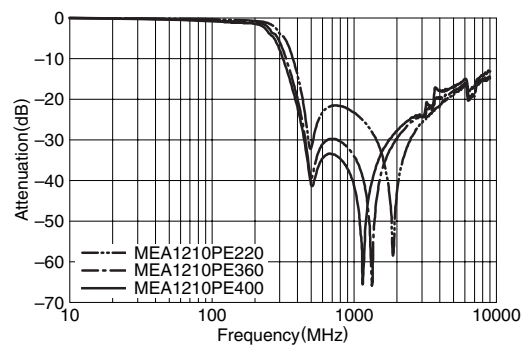

RECOMMENDED SOLDERING CONDITION REFLOW SOLDERING

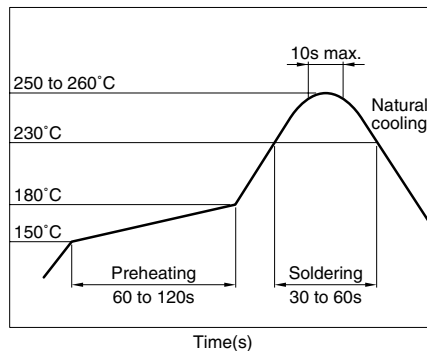

• All specifications are subject to change without notice.