




REV.	DESCRIPTION/ECO NO.	DATE
	RELEASED	8/20/99
A	WIRE DIAGRAM CHNGS	10/31/00
B	CONVERT TO CAD	6/8/01
C	ADD HOLE DIA.	3/15/02

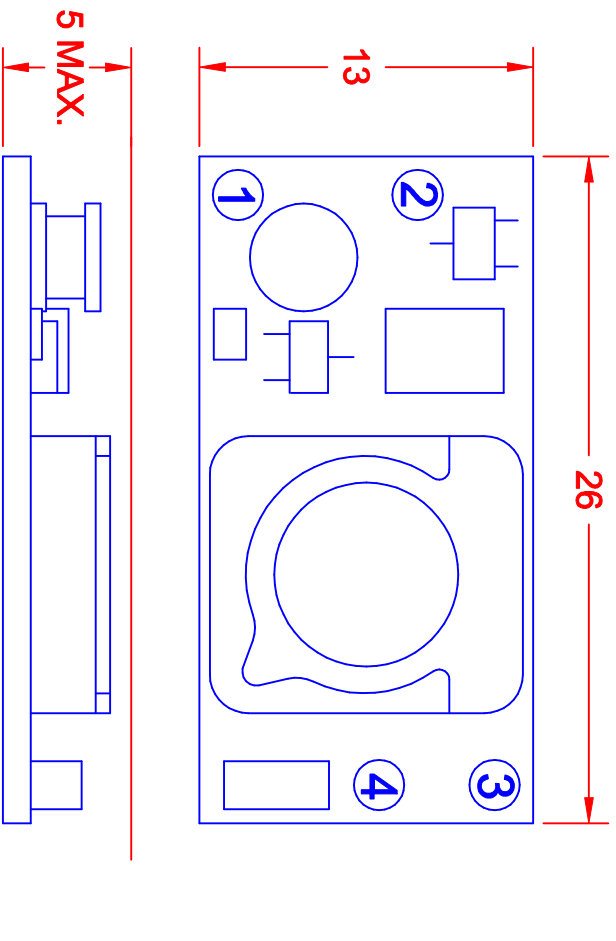

CHARACTERISTICS			
	MIN	TYP	MAX
INPUT VOLTAGE: (vdc)	2.5	3.0	3.5
INPUT CURRENT: (mA)	350	400	450
OUTPUT VOLTAGE: (Vrms)	600	650	700
OUTPUT CURRENT (maRms)	4.0	4.5	5.0
OUTPUT FREQUENCY: (kHz)	70	80	90
OPERATING TEMP: (CELSIUS)	0	25	50

BOARD PIN #	INPUT
1	+V (V in)
2	V (GND)
3	OUT GND
4	V OUT

TOLERANCE		
L < 20	20 ≤ L < 50	50 ≤ L < 100
±0.2	±0.3	±0.4
100 ≤ L		±0.5

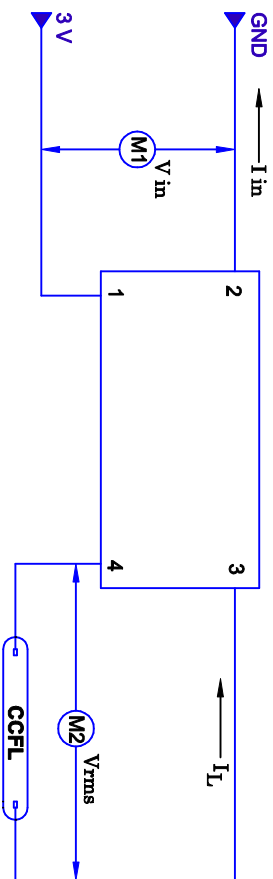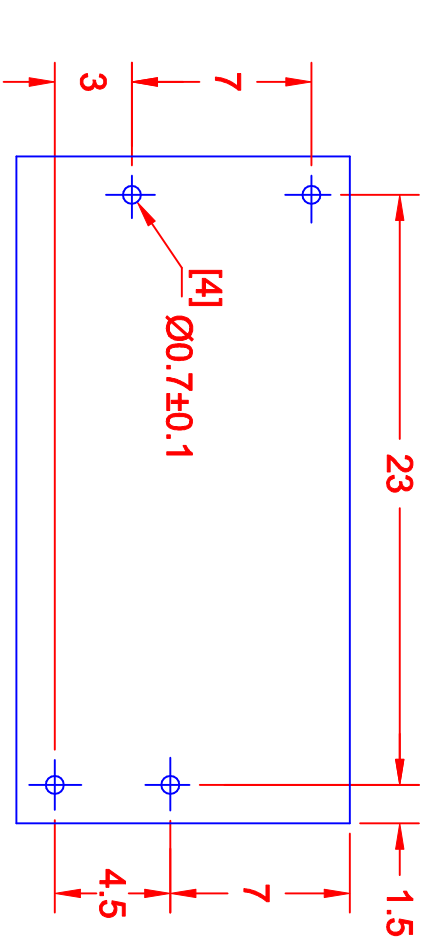

METRIC		DIMENSIONS ARE IN MILLIMETERS	
	THIRD ANGLE PROJECTION	TOLERANCE UNLESS OTHERWISE SPECIFIED	
	1 PL +/- 0.2	2 PL +/- 0.2	
	ANGLE +/- 0	ANGLE +/- 0	
DRAWN BY	L. WENGSTROM	APP'D BY	F.D.
DATE	3/15/02	DATE	3/15/02
- CAD DRAWING -			
MANUAL REVISIONS NOT PERMITTED			
TITLE		SIZE	SCALE
JKL COMPONENTS CORPORATION		A	NONE
3 V CCFL POWER SUPPLY		FSCH NO.	DRAWING NO.
		55335	BXA-302
RELEASED DATE	8/20/99	REVISION DATE	3/15/02
REV. NO.	C	SHEET	
		OF	