
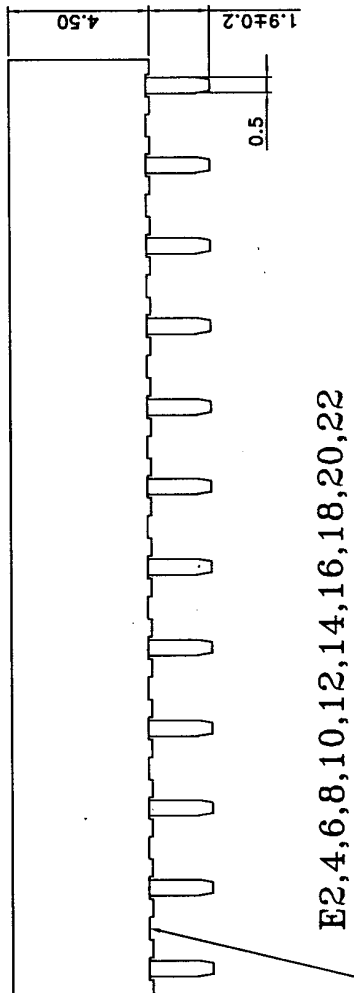



1 2 3 4 5

SPECIFICATIONS

Current Rating: 1 Amps
 Insulator resistance: 5000 Megohms min.
 Dielectric withstanding: AC 500 V
 Operating Temperature: -40°-+105°C
 Max Processing Temp: 230° for 30~60 seconds
 (260° for 10 seconds)
 Contact Material: Phosphor bronze
 Insulator Material: Polyester, UL 94V-0
 © Standard: Nylon-6T

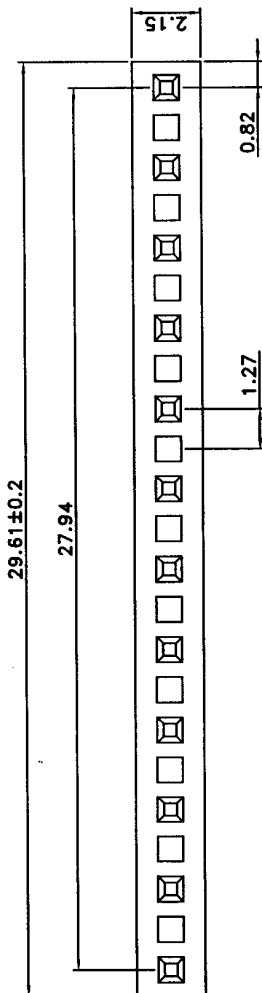

E2,4,6,8,10,12,14,16,18,20,22

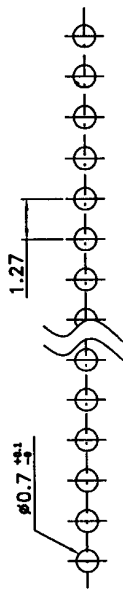

P.C.B LAYOUT

需测量的重要尺寸	测量工具
PITCH: 1.27±0.05mm	PCB 测试板
DIP: 1.9±0.2mm	游标卡尺

<p>繼德工業股份有限公司 Neltron Industrial Co., Ltd.</p>		DESCRIPTION: 1.27MM CENTER SINGLE ROW PCB SOCKET		SIZE A4
GENERAL TOLERANCE: .X = ±0.2 .XX = ±0.15		UNIT: MM SCALE:		PART NO: 2200SA-23SG-E2,4,6,8,10,12,14,16,18,20,22
DRAWN: JACK		CHECKED:		
APPROVAL:		APPROVAL:		PROJECTION:
DATE		DATE		
FILE		FILE		BY
JACK		JACK		
REV	DATE	FILE	DATE	BY
E	02-18-2003	JACK	JACK	BY
D	01-17-2003	JACK	JACK	BY
C				BY
B				BY
A				BY