



DATE	REVISIONS	REV	DRAWING NUMBER LDS-A324RI	REV
------	-----------	-----	------------------------------	-----

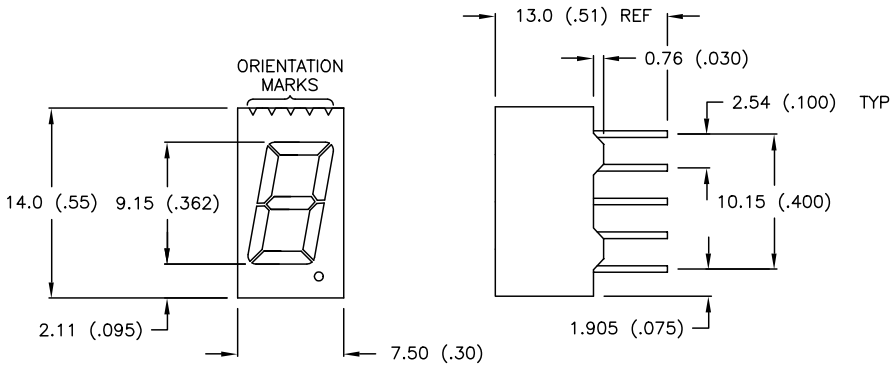

ELECTRO-OPTICAL CHARACTERISTICS TA=25 °C					
PARAMETER	MIN	TYP	MAX	UNITS	TEST COND
PEAK WAVELENGTH		635 (RED)		nm	
FORWARD VOLTAGE		2.1	2.6	V _f	
REVERSE VOLTAGE	5.0			V _r	I _r =100uA
AXIAL INTENSITY		350		ucd	I _f =10mA
EMITTED COLOR:	RED				
FONT COLOR:	GRAY				
SEGMENT:	WHITE				

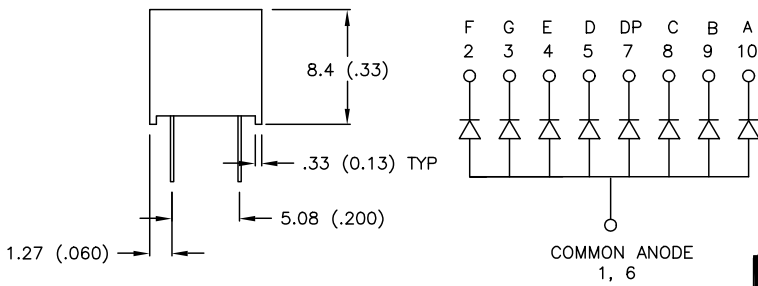

LIMITS OF SAFE OPERATION AT 25 DEG. C		
PARAMETER	MAX	UNITS
PEAK FORWARD CURRENT	50	mA
STEADY CURRENT	20	mA
POWER DISSIPATION	416	mW
OPERATING, STORAGE TEMP.	-25 TO +80	°C

NOTES:

1. ALL DIMENSIONS ARE IN MILLIMETERS AND INCHES TOLERANCE IS (.025 (.001")) UNLESS OTHERWISE SPECIFIED.
2. IV TESTED CONDITION IF=10mA AND THE LISTED IV IS THE AVERAGE INTENSITY FOR EVERY SEGMENT LISTED.

LDSA32AB

LUMEX OPTO COMPONENTS INC.		292 E. HELLEN ROAD PALATINE, ILLINOIS 60067 (708) 359-2790	
DATE: 8-31-93	APPROVED BY:	DRAWN BY:	
SCALE: N/A			
.36" SEVEN SEGMENT DISPLAY, RED, COMMON ANODE			
PAGE 1 OF 1	DRAWING NUMBER LDS-A324RI	REV	