

Simple 90V, 25mA, Temperature Compensated, Constant Current, LED Driver IC

Features

- ▶ 5.0 - 90V operating range (V_{A-B})
- ▶ 25mA $\pm 10\%$ at 5.0 - 90V
- ▶ 0.01%/°C typical temperature coefficient
- ▶ No external components (two terminal device)
- ▶ Can be paralleled for higher current

Applications


- ▶ LED channel lighting
- ▶ Industrial lamp indicators
- ▶ Accent lighting

General Description


The Supertex CL25 is a high voltage, temperature compensated, constant current source. The device is trimmed to provide a constant current of 25mA $\pm 10\%$ at an input voltage of 5.0 - 90V. No external components are required. The device can be used as a two terminal constant current source or constant current sink.

A typical application for the CL25 is to drive LEDs with a constant current of 25mA. Multiple CL25s can also be used in parallel to provide higher currents such as 50mA, 75mA or 100mA. The device is available in TO-92 and TO-243AA (SOT-89) packaging.

Typical Application Circuit

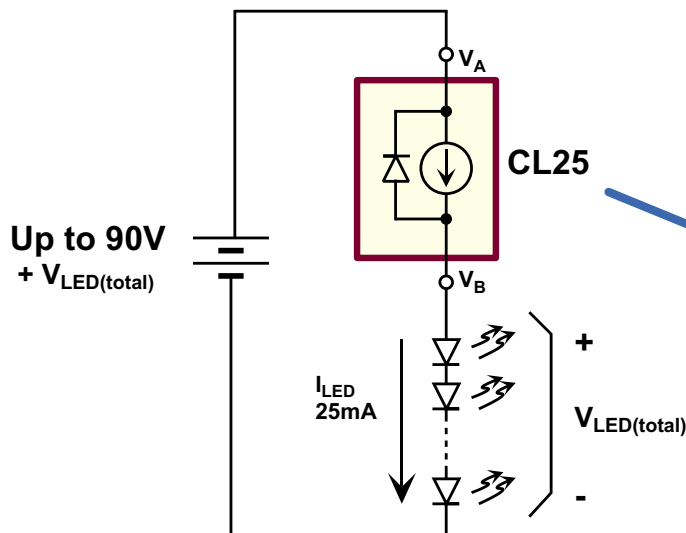

Functional Circuit Diagram

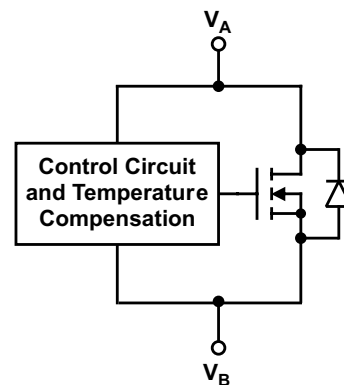

Ordering Information

Device	Package Options	
	TO-92	TO-243AA (SOT-89)
CL25	CL25N3-G	CL25N8-G




-G indicates package is RoHS compliant ('Green')

Thermal Characteristics

Package	Power Dissipation @T _A = 25°C (W)	θ _{JC} (°C/W)	θ _{JA} (°C/W)
TO-92	0.6	125	170
TO-243AA (SOT-89)	1.3*	15	78*

* Mounted on FR4 board; 25mm x 25mm x 1.57mm

Pin Configuration

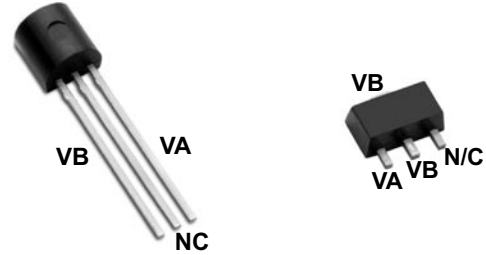

TO92 (N3) TO-243AA (SOT-89) (N8)


NC = No Connect

Absolute Maximum Ratings

Parameter	Value
Operating voltage, V _{A-B}	100V
Operating junction temperature, T _J	-40°C to +125°C
Storage temperature, T _S	-55°C to +150°C


Absolute Maximum Ratings are those values beyond which damage to the device may occur. Functional operation under these conditions is not implied. Continuous operation of the device at the absolute rating level may affect device reliability. All voltages are referenced to device ground.

Product Marking



YY = Year Sealed
WW = Week Sealed
_____ = "Green" Packaging

TO-92 (N3)



W = Code for week sealed
_____ = "Green" Packaging


TO-243AA (SOT-89) (N8)

Electrical Characteristics


(T_A = 25°C unless otherwise specified)

Sym	Parameter	Min	Typ	Max	Units	Conditions
V _{A-B}	Operating voltage	5.0	-	90	V	---
I _{A-B}	Current regulation	22.5	25	27.5	mA	V _{A-B} = 5.0V - 90V
ΔI _{A-B} /ΔT	I _{A-B} temperature coefficient	-	0.01	-	%/°C	V _{A-B} = 45V, T _J = -40°C to +100°C
T _J	Operating junction temperature	-40	-	125	°C	---
R _{A-B}	Dynamic resistance	-	300	-	kΩ	---


Functional Circuit Diagram

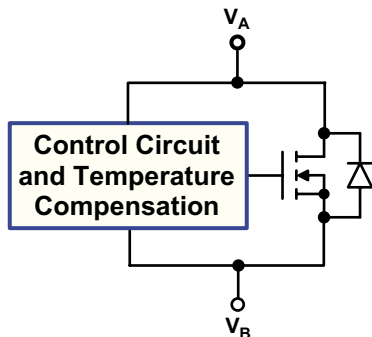


Equivalent Block Diagram




Temperature Characteristics

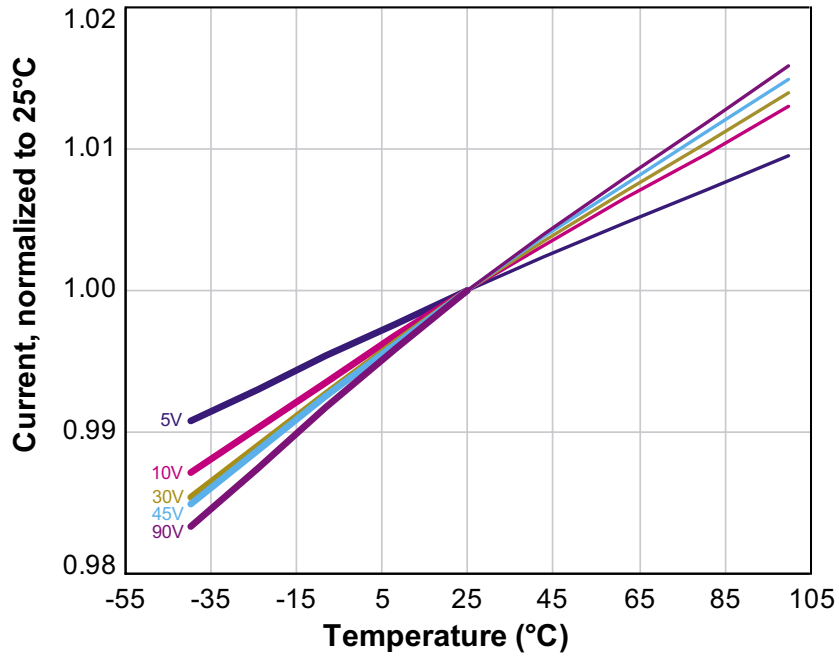


Output Current vs Voltage

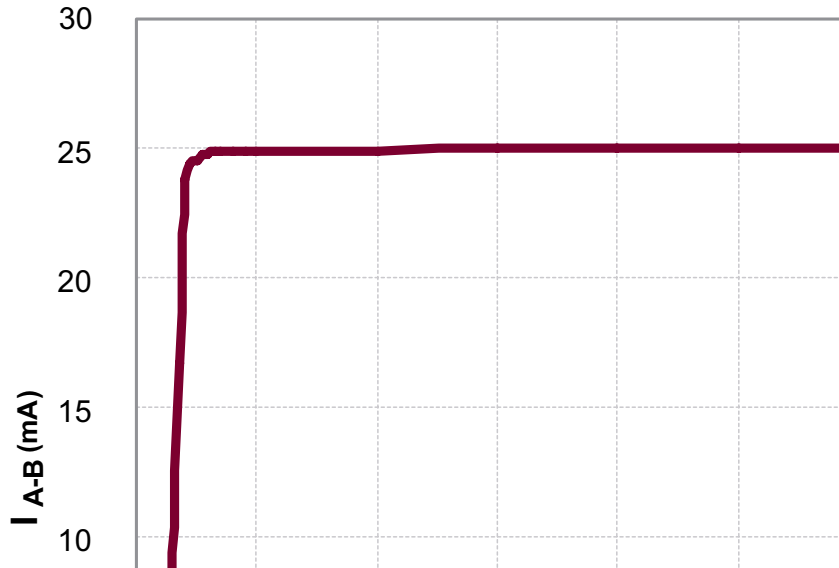


CL25 for Multiple LED Strings

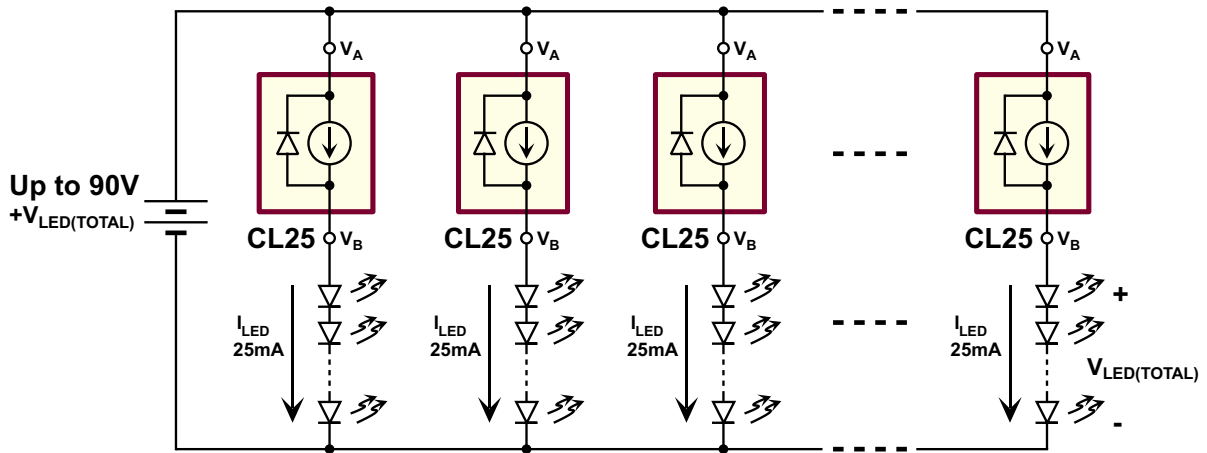

CL25 for Higher Current

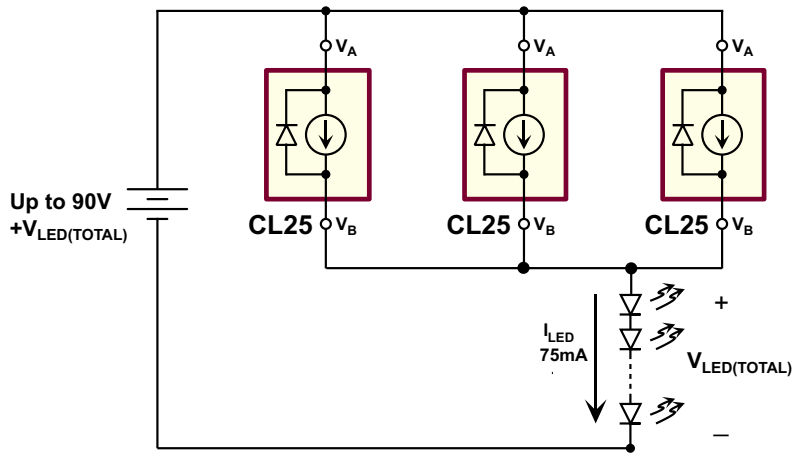

3-Lead TO-92 Package Outline (N3)

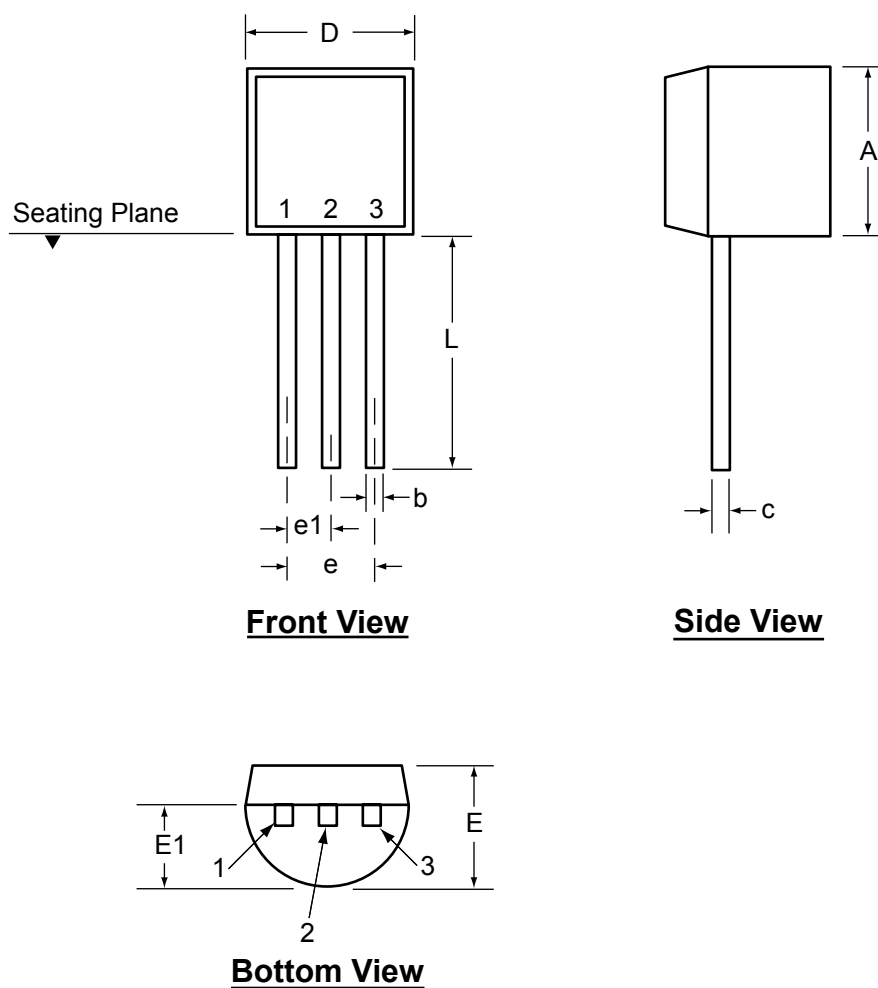

Symbol	A	b	c	D	E	E1	e	e1	L	
Dimensions (inches)	MIN	.170	.014 [†]	.014 [†]	.175	.125	.080	.095	.045	.500
	NOM	-	-	-	-	-	-	-	-	-
	MAX	.210	.022 [†]	.022 [†]	.205	.165	.105	.105	.055	.610*

JEDEC Registration TO-92.


* This dimension is not specified in the original JEDEC drawing. The value listed is for reference only.

† This dimension is a non-JEDEC dimension.

Drawings not to scale.

Supertex Doc.#: DSPD-3TO92N3, Version D080408.

3-Lead TO-243AA (SOT-89) Package Outline (N8)

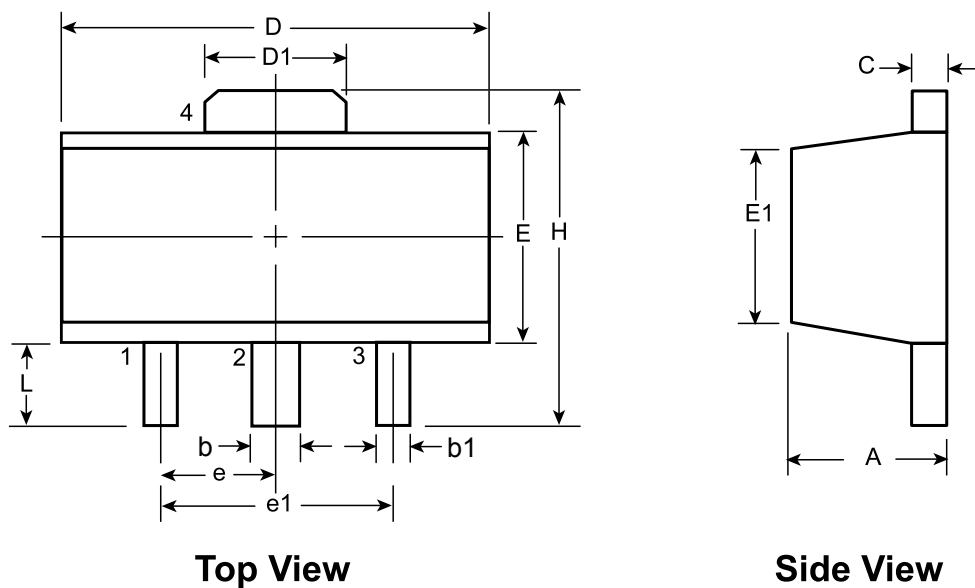

Symbol	A	b	b1	C	D	D1	E	E1	e	e1	H	L		
Dimensions (mm)	MIN	1.40	0.44	0.36	0.35	4.40	1.62	2.29	2.13	1.50 BSC	3.00 BSC	3.94	0.89	
	NOM	-	-	-	-	-	-	-	-			-	-	-
	MAX	1.60	0.56	0.48	0.44	4.60	1.83	2.60	2.29			4.25	1.20	

JEDEC Registration TO-243, Variation AA, Issue C, July 1986.

Drawings not to scale.

Supertex Doc. #: DSPD-3TO243AAN8, Version D070908.

Supertex inc. does not recommend the use of its products in life support applications, and will not knowingly sell them for use in such applications unless it receives an adequate "product liability indemnification insurance agreement." Supertex inc. does not assume responsibility for use of devices described, and limits its liability to the replacement of the devices determined defective due to workmanship. No responsibility is assumed for possible omissions and inaccuracies. Circuitry and specifications are subject to change without notice. For the latest product specifications refer to the Supertex inc. website: <http://www.supertex.com>.

©2008 Supertex inc. All rights reserved. Unauthorized use or reproduction is prohibited.

Doc.# DSFP-CL25
A091108

Supertex inc.
1235 Bordeaux Drive, Sunnyvale, CA 94089
Tel: 408-222-8888
www.supertex.com