


PART NUMBER

REV.

SSI-LXR3816SYD-150

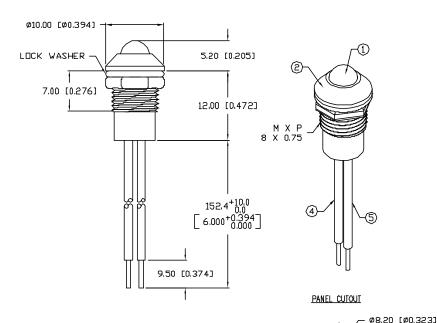

ELECTRO-OPTICAL CH	ARACTERIS	STICS TA=25°	C	$I_f = 20mA$	
PARAMETER	MIN	TYP	MAX	UNITS	TEST COND
PEAK WAVELENGTH		590		nm	
FORWARD VOLTAGE		2.1	2.5	Vf	
REVERSE VOLTAGE	5.0			٧r	Ir=100µA
AXIAL INTENSITY		100		mcd	$I_f = 20mA$
VIEWING ANGLE		60		2x theta	
EMITTED COLOR:	YELLOW				
EPOXY LENS FINISH:	YELLOW	DIFFUSED			

## LIMITS OF SAFE OPERATION AT 25°C

	-	
PARAMETER	MAX	UNITS
PEAK FORWARD CURRENT*	150	mA
STEADY CURRENT	30	mA
POWER DISSIPATION	100	тW
DERATE FROM 25°C	- 1.2	m₩/°C
OPERATING, STORAGE TEMP.	-40 TO +85	°C

\* t<10µS

## NOTES:

- 1. SSL-LX5093SYD, YELLOW LED. TRIM LEADS TO 4mm. 2. SSI-LXR3816, CHROME HOUSING.

- 2. SSI-LXR3016, CHRUME HOUSING.
  3. SSH-LXH4815BSG, BUSHING (NOT SHOWN). INSERT AND CRIMP.
  4. ANODE LEAD: LXP-WST24RDTOC, 24 AWG, TINNED OVERCOAT, RED INSULATION.
  CUT 160mm LONG, STRIP BOTH ENDS 3mm & 9.5mm.
  5. CATHODE LEAD: LXP-WST24BLTOC, 24 AWG, TINNED OVERCOAT, BLACK INSULATION.
  CUT 160mm LONG, STRIP BOTH ENDS 3mm & 9.5mm.
- 6. CRIMP WIRES TO LED LEADS.

CHIMP WIRES TO LED LEADS.

UNCONTROLLED DOCUMENT

\*\*UNLESS OTHERWISE SPECIFIED TOLERANGES PER DECIMAL PRECISION ARE: X=±1 (±0.039), XX=±0.5 (±0.020), XXX=±0.25 (±0.010), XXXX=±0.127 (±0.006). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.003), MIN= $^{+0.000}_{-0.00}$  MAX:=  $^{+0.000}_{-0.000}$  MAX:=  $^{+0.0000}_{-0.000}$  MAX

PART NUMBER REV. SSI-LXR3816SYD-150

T-5mm 590nm AlinGaP YELLOW LED PANEL INDICATOR, YELLOW DIFFUSED LENS, 6.0" WIRE LEADS.

THE INFORMATION CONTIDENTIAL INFORMATION
THE INFORMATION CONTINUED IN THIS DOCUMENT IS THE PROPERTY OF
LUMEX INC. EXCEPT AS SPECFORLLY AUTHORIZED IN WIRTING BY LUMEX
INC. THE HOLDER OF THIS DOCUMENT SIMIL KEEP ALL INFORMATION
CONTAINED HEREIN COMPIEKTIAL AND SHALL PROTECT SAME IN WHOLE OR
IN PART FROM DISCLOSURE AND DISSEMBATION TO ALL THIFTO PARTIES.

RELIABILITY NOTE

OUR NAMY YEARS OF EXPERENCE DATA ACCUMULATION INDICATE THAT

SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE.

PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.

290 E. HELEN ROAD PALATINE, IL 60067-6976 PHONE: +1.847.359.2790 US WEB: www.lumex.com TW WEB: www.lumex.com.tw

DRAWN BY: CHECKED BY: APPROVED BY: DATE: 11.14.01 PAGE: 1 OF 1 SCALE: BC

Downloaded from Elcodis.com electronic components distributor