

**Part Numbers**

Package & Chip Type	Line Voltage <sup>1</sup>	Switch Type <sup>2</sup>	Output Current	Feature <sup>3</sup>
S	24	R	12	-22
		D	25	
		A	40	
S	48	R	25	-22
		D	50	
		A	75	
			95	
			125	
S	60	D	50	
			75	
			95	
			125	

**Part Number Example: S48A25-22**
**NOTES**

- 1) Line Voltage (nominal): 24 = 240 Vac; 48 = 480 Vac; 60 = 600 Vac
- 2) Switch Type: R = Random turn-on; D = Zero-cross turn-on;  
A = AC control, Zero-cross turn-on
- 3) Feature: -22 = 24 Vac control. Available on A type 240 Vac, 25, 25, 125A models

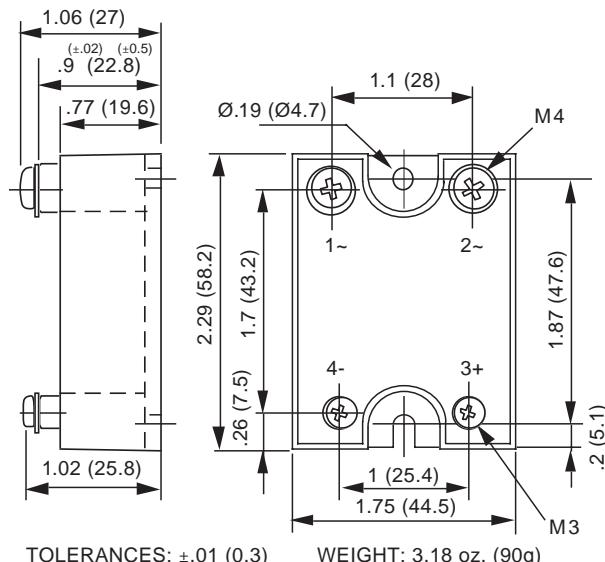
**MECHANICAL SPECIFICATION**


Figure 1 — S relays, 12–95 A;  
dimensions in inches (mm)  
125A model uses larger M5 output screw terminals


**FEATURES/BENEFITS**

- Industry standard package
- Internal snubber (except S60 models)
- Designed for all types of loads
- AC or DC control available
- Excellent thermal performance
- Tight zero-cross window for low EMI
- High immunity to surges

**DESCRIPTION**

The Series S single-phase relays are designed for all types of loads. The design incorporates an SCR or triac output. The relays utilize optical isolation to protect the control from load transients. All contain an internal snubber for output protection. High-current models are excellent for motor and phase angle control.

**APPLICATIONS**

- Heating control
- Motor control
- Uninterruptible power supplies
- Light dimmers
- Industrial and process control
- On/Off controls of AC equipment

**APPROVALS**

S24 and S48 models are UL recognized.  
UL File Number: E128555.

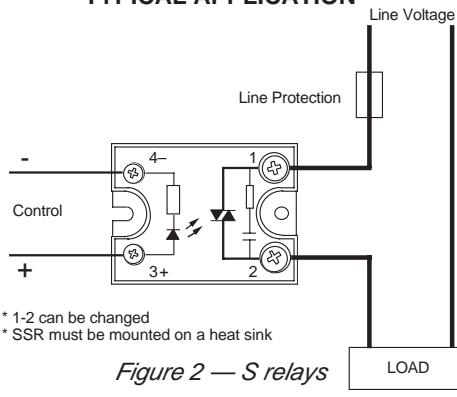
**TYPICAL APPLICATION**


Figure 2 — S relays

**INPUT (CONTROL) SPECIFICATION**

	Input Type	Min	Max	Units
<b>Control Range</b>				
S24	R	3	30	Vdc
	D	4	30	Vdc
S48	R	4	30	Vdc
	D	5	30	Vdc
S60	D	5	30	Vdc
SxxxA	A	90	240	Vac/Vdc
Sxxxxx-22	A	17	80	Vac/Vdc

**Input Current Range**

S	R/D	3	30	mA
S	A	3	8	mA
Sxxxxx-22	A	5.6	26	mA

**Must Turn-Off Voltage**

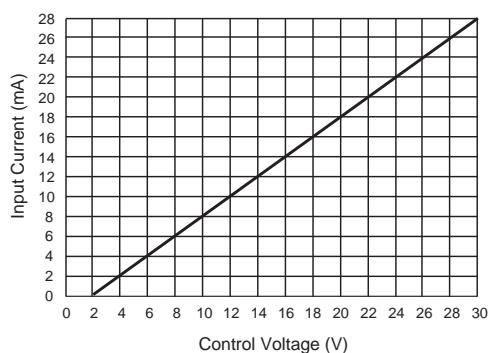
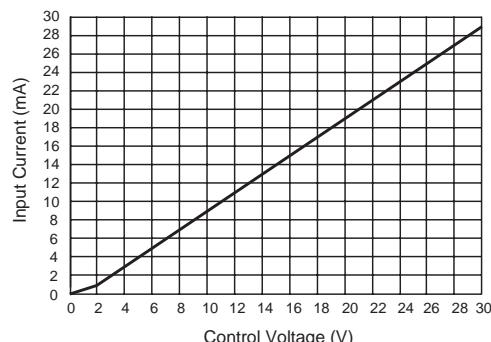
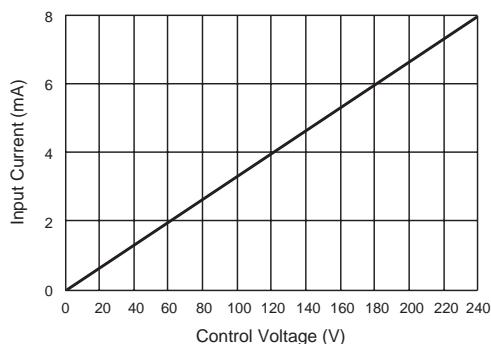
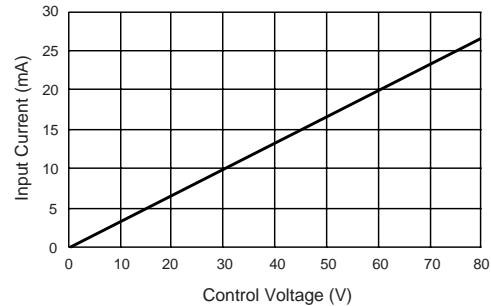
S	R/D	1	Vdc
S24	A	15	Vac
S48	A	1	Vac
Sxxxxx-22		3	Vac

**Input Resistance (Typical)**

S	R/D	1000	Ohms
S	A	30,000	Ohms
Sxxxxx-22		3000	Ohms

**Reverse Voltage Protection**

S	R/D	30	V
S	A		NA

**CONTROL CHARACTERISTICS**

*Figure 3a — S48R, S48D and S60D relays*
**CONTROL CHARACTERISTICS**

*Figure 3b — S24D/R relays*

*Figure 3c — S24A and S48A relays*

*Figure 3d — Sxxxxx-22 relays*

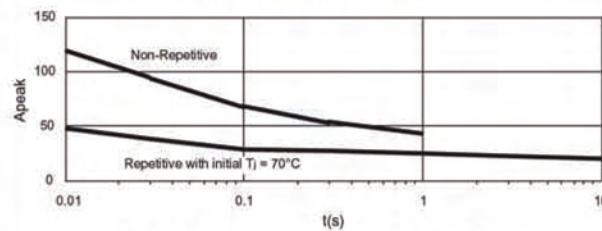
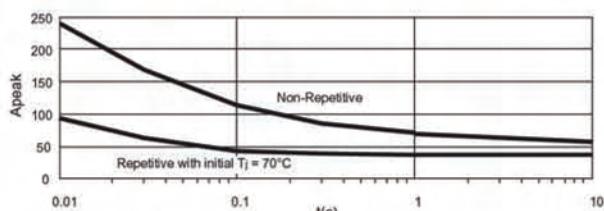
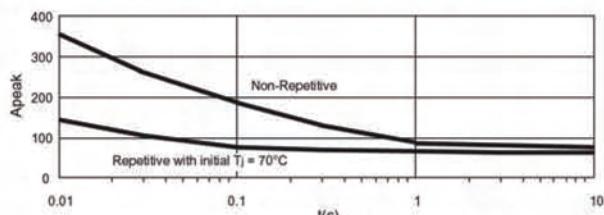
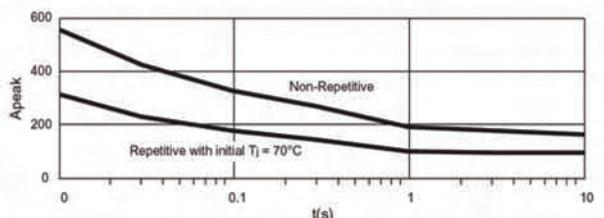
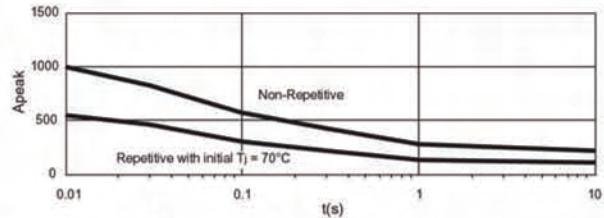
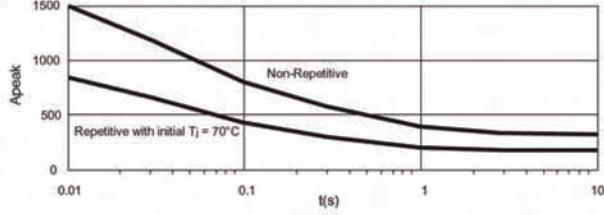
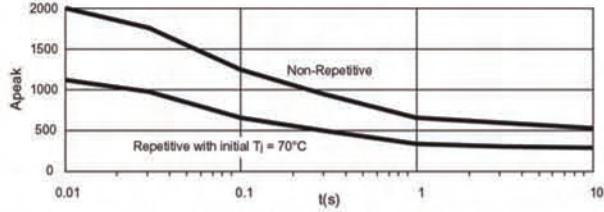
OUTPUT (LOAD) SPECIFICATION				OUTPUT (LOAD) SPECIFICATION (Continued)			
Input Type	Min	Max	Units	Input Type	Min	Max	Units
Operating Range				Maximum Surge Current Rating (Non-Repetitive)			
S24	12	280	Vrms	(Continued)			
S48	24	520	Vrms	125A output current		2000	A
S60	24	660	Vrms				
Peak Voltage				On-State Voltage Drop			
S24		600	Vpeak	12A output current		1.3	V
S48		1200	Vpeak	25A output current		1.2	V
S60		1600	Vpeak	40A output current		1.4	V
Load Current Range (Resistive)				50A output current		1.4	V
12A output current	.005	12	Arms	75A output current		1.35	V
25A output current	.005	25	Arms	S60D75		1.3	V
40A output current	.005	40	Arms	95A output current		1.3	V
50A output current	.005	50	Arms	S60D90		1.15	V
75A output current	.005	75	Arms	125A output current		1.3	V
95A output current	.005	95	Arms	S60D125		1.1	V
125A output current	.005	125	Arms				
Inductive Load Current				Zero-Cross Window (Typical)			
12A output current		2.5	Arms	S	R	NA	
25A output current		5	Arms	S	D/A	±12	Vac
40A output current		9	Arms				
50A output current		12	Arms	Off-State Leakage Current (60Hz)			
75A output current		16	Arms	S24		3	mA
95A output current		20	Arms	S48	D/A	3	mA
125A output current		30	Arms	S48	R	2.5	mA
Capacitive Load Current				S60	A	1	mA
S60D50		13	Arms				
S60D75		24	Arms	Turn-On Time (60 Hz)			
S60D90		36	Arms	S	R	0.1	ms
S60D125		48	Arms	S	D	8.3	ms
Maximum Surge Current Rating (Non-Repetitive)				S	A	24.9	ms
12A output current		120	A				
S24, 25A output current		240	A	Turn-Off Time (60 Hz)			
S24R25		250	A	S	R/D	8.3	ms
S48, 25A output current		230	A	S	A	24.9	ms
40A output current		350	A				
50A output current		550	A	Off-State dv/dt			
75A output current		1000	A	All relays		500	V/μs
95A output current		1500	A				

**OUTPUT (LOAD) SPECIFICATION (Continued)**

Input Type	Min	Max	Units
Operating Frequency			
All relays	0.1	440	Hz
I <sup>2</sup> t for match fusing (<8.3ms)			
12A output current	72	A <sup>2</sup> S	
S24R25	312	A <sup>2</sup> S	
S24D/S24A 25A output current	288	A <sup>2</sup> S	
S48 25A output current	265	A <sup>2</sup> S	
40A output current	612	A <sup>2</sup> S	
50A output current	1500	A <sup>2</sup> S	
75A output current	5000	A <sup>2</sup> S	
95A output current	11000	A <sup>2</sup> S	
125A output current	20000	A <sup>2</sup> S	

**ENVIRONMENTAL SPECIFICATION**

	Min	Max	Units
Operating Temperature			
S48D50	-55	100	°C
All Other Relays	-40	100	°C
Storage Temperature			
S48D50	-55	100	°C
All Other Relays	-40	100	°C
Input-Output Isolation			
	4000	Vrms	
Output-Case Isolation			
12A output current	2500	Vrms	
25A output current	2500	Vrms	
40A output current, R	2500	Vrms	
40A output current, D	3300	Vrms	
40A output current, A	3300	Vrms	
50A output current	3300	Vrms	
75A output current	3300	Vrms	
95A output current	3300	Vrms	
125A output current	3300	Vrms	

**SURGE CURRENT**

*Figure 4a — 12A output current*
**SURGE CURRENT (continued)**

*Figure 4b — 25A output current*

*Figure 4c — 40A output current*

*Figure 4d — 50A output current*

*Figure 4e — 75A output current*

*Figure 4f — 95A output current*

*Figure 4g — 125A output current*

### THERMAL CHARACTERISTICS

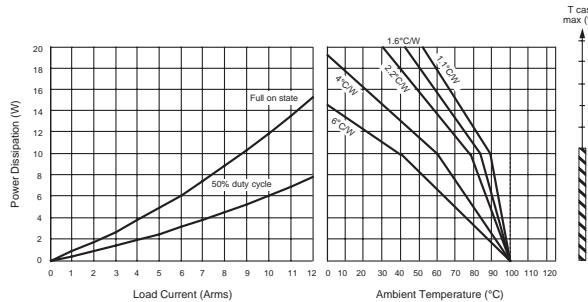


Figure 5a — 12A output current

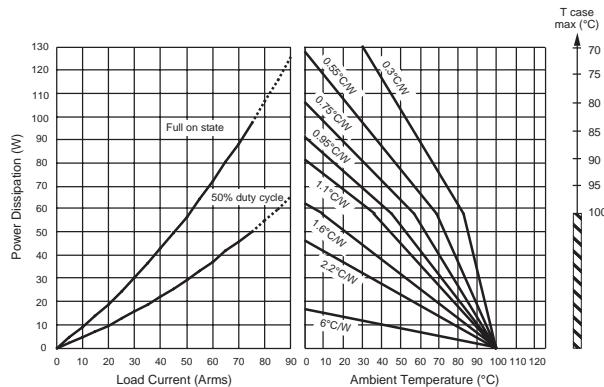


Figure 5e — 75A output current

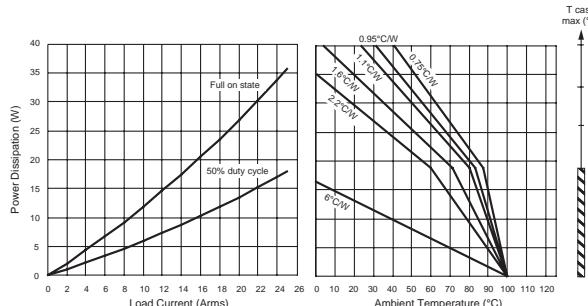


Figure 5b — 25A output current

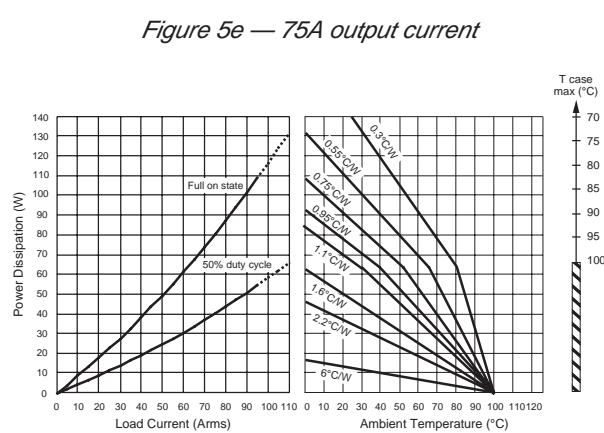


Figure 5f — 95A output current

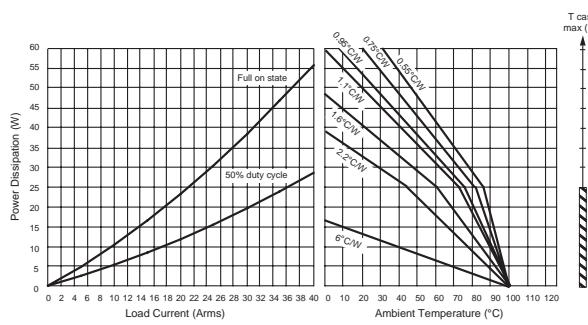


Figure 5c — 40A output current

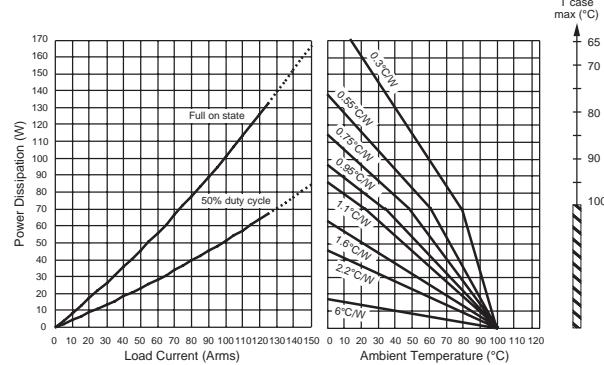


Figure 5g — 125A output current

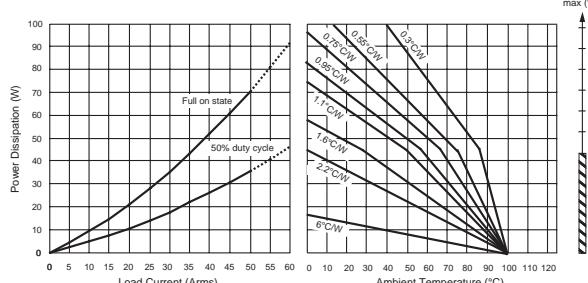


Figure 5d — 50A output current

#### NOTES:

1. Electrical specifications measured at 25°C unless otherwise specified.
2. For 800Hz applications, contact factory.
3. For additional/custom options, contact factory.

#### OPTIONAL ADD-ONS

Please order add-ons separately:

- -12 — Thermal pad installed.
- -14 — Plastic touch-proof cover.