


## Glass Passivated Power Voltage-Regulating Diodes



DO-204AL (DO-41)

### FEATURES

- Plastic MELF package
- Ideal for automated placement
- Glass passivated chip junction
- Low Zener impedance
- Low regulation factor
- Solder dip 275 °C max. 10 s, per JESD 22-B106
- Not recommended for PCB bottom side wave mounting
- AEC-Q101 qualified
- Compliant to RoHS Directive 2002/95/EC and in accordance to WEEE 2002/96/EC

AUTOMOTIVE  
GRADE  
Available



RoHS  
COMPLIANT

### PRIMARY CHARACTERISTICS

$V_Z$	100 V to 200 V
$P_D$	1500 mW
$I_R$ ( $V_Z \geq 12$ V)	5.0 $\mu$ A
$T_J$ max.	150 °C

### TYPICAL APPLICATIONS

For general purpose regulation and protection applications.

### MECHANICAL DATA

**Case:** DO-204AL (DO-41)

Molding compound meets UL 94 V-0 flammability rating  
Base P/N-E3 - RoHS compliant and commercial grade  
Base P/NHE3 - RoHS compliant and automotive grade

**Terminals:** Matte tin plated leads, solderable per J-STD-002 and JESD 22-B102

E3 suffix meets JESD 201 class 1A whisker test, HE3 suffix meets JESD 201 class 2 whisker test

**Polarity:** Color band denotes cathode end

### MAXIMUM RATINGS ( $T_A = 25$ °C unless otherwise noted)

PARAMETER	SYMBOL	VALUE	UNIT
Operating junction and storage temperature range	$T_J, T_{STG}$	- 55 to + 150	°C

# Z4KE100 thru Z4KE200A

Vishay General Semiconductor



## ELECTRICAL CHARACTERISTICS (T<sub>A</sub> = 25 °C unless otherwise noted) <sup>(2)</sup>

PART NUMBER <sup>(1)</sup>	ZENER VOLTAGE AT 5.0 mA		MAXIMUM ZENER DYNAMIC IMPEDANCE				MAXIMUM DC REVERSE LEAKAGE CURRENT AT V <sub>R</sub>			MAXIMUM INSTANTANEOUS FORWARD VOLTAGE AT 0.50 A	MAXIMUM CONTINUOUS REGULATOR CURRENT <sup>(2)</sup>
	V <sub>Z</sub> (V)		Z <sub>zT</sub>	I <sub>zT</sub>	I <sub>zK</sub>	Z <sub>zK</sub>	V <sub>R</sub>	I <sub>R</sub> AT 25 °C	I <sub>R</sub> AT 100 °C	V <sub>FM</sub>	I <sub>zM</sub>
	MIN.	MAX.	(mA)	(Ω)	(mA)	(Ω)	(V)	(μA)	(μA)	(V)	(mA)
Z4KE100	90	110	5.0	500	0.25	5000	72.0	0.5	100	1.0	15.0
Z4KE100A	95	105	5.0	500	0.25	5000	76.0	0.5	100	1.0	15.0
Z4KE110	99	121	5.0	600	0.25	5000	79.2	0.5	100	1.0	13.0
Z4KE110A	104	116	5.0	600	0.25	5000	83.2	0.5	100	1.0	13.0
Z4KE120	108	132	5.0	700	0.25	5000	86.4	0.5	100	1.0	12.0
Z4KE120A	114	126	5.0	700	0.25	5000	91.2	0.5	100	1.0	12.0
Z4KE130	117	143	5.0	800	0.25	5000	93.6	0.5	100	1.0	11.0
Z4KE130A	124	137	5.0	800	0.25	5000	99.2	0.5	100	1.0	11.0
Z4KE140	126	154	5.0	900	0.25	5000	100.0	0.5	100	1.0	10.7
Z4KE140A	133	147	5.0	900	0.25	5500	106.4	0.5	100	1.0	10.7
Z4KE150	135	165	5.0	1000	0.25	6000	108.0	0.5	100	1.0	10.0
Z4KE150A	142	158	5.0	1000	0.25	6000	113.6	0.5	100	1.0	10.0
Z4KE160	144	176	5.0	1100	0.25	6500	115.2	0.5	100	1.0	9.0
Z4KE160A	152	168	5.0	1100	0.25	6500	121.6	0.5	100	1.0	9.0
Z4KE170	153	187	5.0	1200	0.25	7000	122.4	0.5	100	1.0	8.8
Z4KE170A	162	179	5.0	1200	0.25	7000	129.6	0.5	100	1.0	8.0
Z4KE180	162	198	5.0	1300	0.25	7000	129.6	0.5	100	1.0	8.0
Z4KE180A	171	189	5.0	1300	0.25	7000	136.8	0.5	100	1.0	8.0
Z4KE190	171	209	5.0	1400	0.25	7500	136.8	0.5	100	1.0	7.9
Z4KE190A	180	200	5.0	1400	0.25	7500	144.0	0.5	100	1.0	7.9
Z4KE200	180	220	5.0	1500	0.25	8000	144.0	0.5	100	1.0	7.0
Z4KE200A	190	210	5.0	1500	0.25	8000	152.0	0.5	100	1.0	7.0

### Notes

<sup>(1)</sup> Standard voltage tolerance is ± 10 % and suffix "A" is ± 5 %

<sup>(2)</sup> Maximum power dissipation is 1500 mW at T<sub>L</sub> = 75 °C with lead length 0.375" (9.5 mm)

## ORDERING INFORMATION (Example)

PREFERRED P/N	UNIT WEIGHT (g)	PREFERRED PACKAGE CODE	BASE QUANTITY	DELIVERY MODE
Z4KE100-E3/54	0.350	54	5500	13" diameter plastic tape and reel
Z4KE100HE3/54 <sup>(1)</sup>	0.350	54	5500	13" diameter plastic tape and reel

### Note

<sup>(1)</sup> Automotive grade

### RATINGS AND CHARACTERISTICS CURVES

( $T_A = 25^\circ\text{C}$  unless otherwise noted)

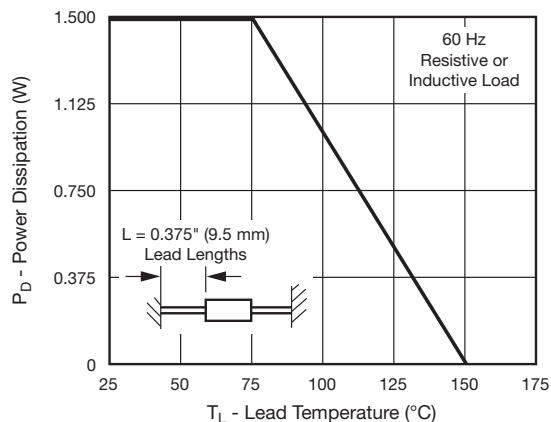


Fig. 1 - Power Derating Curve

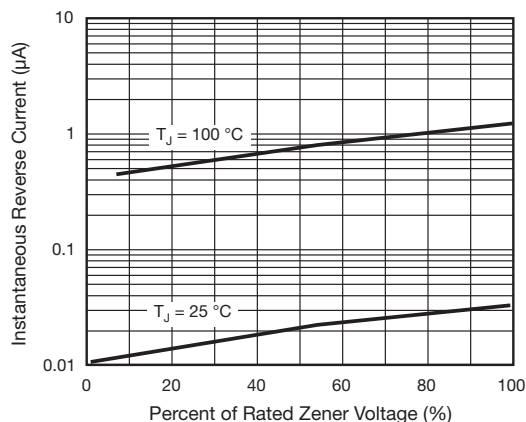


Fig. 4 - Typical Reverse Characteristics

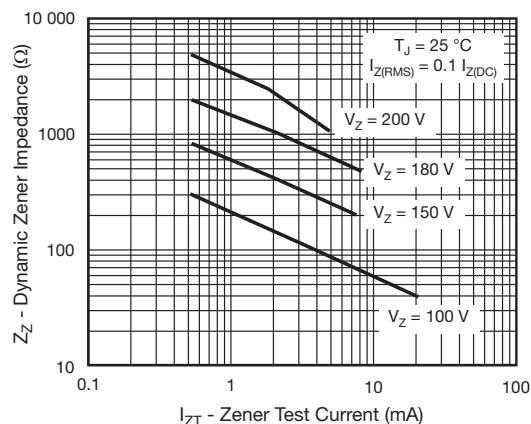


Fig. 2 - Typical Zener Impedance

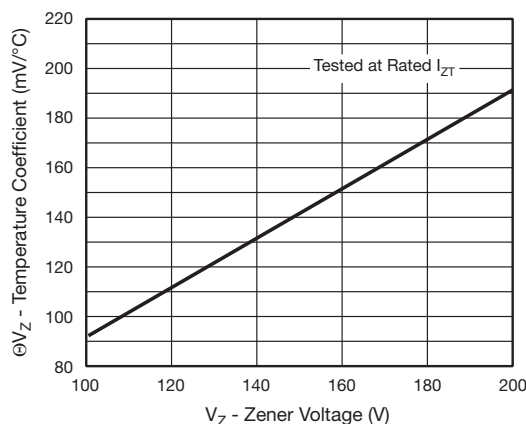


Fig. 5 - Typical Temperature Coefficients

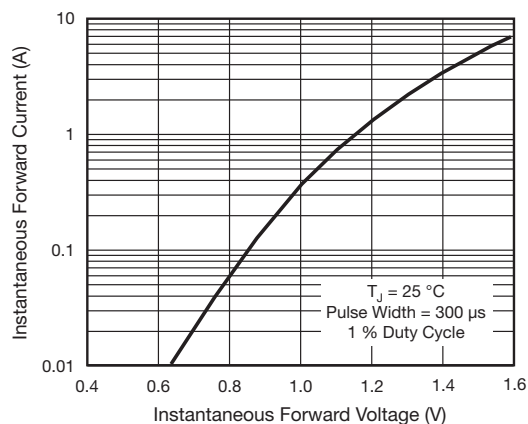


Fig. 3 - Typical Instantaneous Forward Characteristics


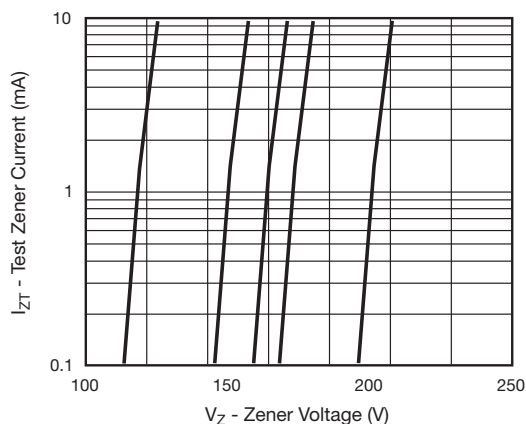


Fig. 6 - Typical Zener Voltage

## PACKAGE OUTLINE DIMENSIONS in inches (millimeters)

DO-204AL (DO-41)



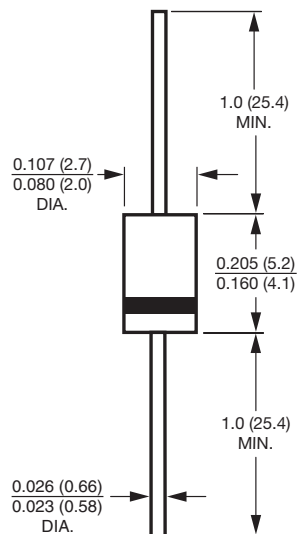

## Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk and agree to fully indemnify and hold Vishay and its distributors harmless from and against any and all claims, liabilities, expenses and damages arising or resulting in connection with such use or sale, including attorneys fees, even if such claim alleges that Vishay or its distributor was negligent regarding the design or manufacture of the part. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.