



ALUMINUM ELECTROLYTIC CAPACITORS

HN Ultra Low Impedance,
For PC motherboard
series




- Lower impedance than HM series.
- Compliant to the RoHS directive (2002/95/EC).

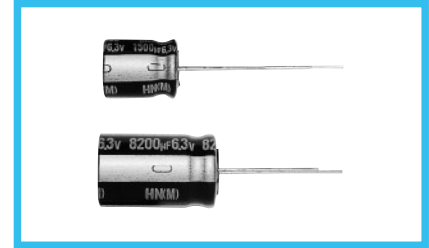


Specifications

Item	Performance Characteristics				
Category Temperature	- 25 to +105°C				
Rated Voltage Range	6.3 to 16V				
Rated Capacitance Range	330 to 8200µF				
Capacitance Tolerance	±20% (120Hz, 20°C)				
Leakage Current	After 2 minutes' application of rated voltage, leakage current is less than 0.03CV				
Tangent of loss angle (tan δ)	For capacitance of more than 1000µF, add 0.02 for every increase of 1000µF				
Stability at Low Temperature	Rated voltage (V)	6.3	10	16	120Hz 20°C
	tan δ (MAX.)	0.22	0.19	0.16	
Endurance	Rated voltage (V)	6.3	10	16	120Hz
	Impedance ratio Z1 / Z20 (MAX.)	Z=-25°C / Z+20°C	3	3	3
Marking	The specifications listed at right shall be met when the capacitors are restored to 20°C after D.C. bias plus rated ripple current is applied for 2000 hours at 105°C, the peak voltage shall not exceed the rated voltage.				
	Capacitance change	Within ±30% of the initial capacitance value			
	tan δ	200% or less than the initial specified value			
Marking	Leakage current	Less than or equal to the initial specified value			
	Printed with gold color on black sleeve.				

Radial Lead Type

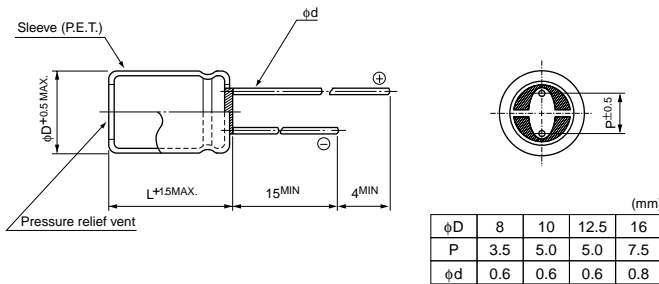

Type numbering system (Example : 6.3V 1800µF)

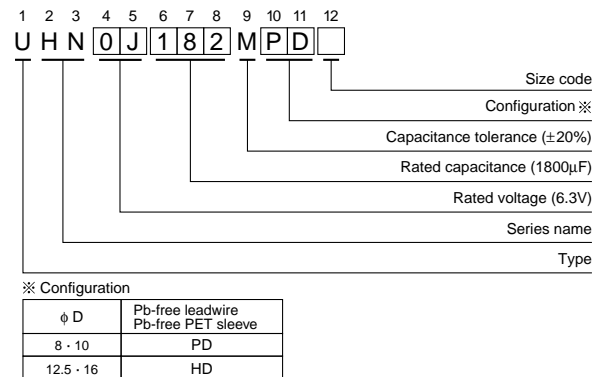

• Please refer to page 20 about the end seal configuration.

Standard Ratings

Cap. (µF)	Code	6.3 (0J)			10 (1A)			16 (1C)		
		Case size φD × L (mm)	Impedance (mΩ) MAX. 20°C / 100kHz	Rated ripple (mArms) 105°C / 100kHz	Case size φD × L (mm)	Impedance (mΩ) MAX. 20°C / 100kHz	Rated ripple (mArms) 105°C / 100kHz	Case size φD × L (mm)	Impedance (mΩ) MAX. 20°C / 100kHz	Rated ripple (mArms) 105°C / 100kHz
330	331							8 × 11.5	21	1300
470	471				8 × 11.5	21	1300	8 × 11.5	21	1300
560	561	8 × 11.5	21	1300				▲ 10 × 12.5	18	1760
680	681				8 × 11.5	21	1300	10 × 12.5	18	1760
820	821	8 × 11.5	21	1300	▲ 10 × 12.5	18	1760	● 8 × 20	12	2220
1000	102	8 × 15	20	1700	○ 10 × 16	11	2280	○ 10 × 16	11	2280
1200	122	▲ 10 × 12.5	18	1760	10 × 12.5	18	1760	10 × 16	11	2280
1500	152	8 × 15	20	1700	● 10 × 16	11	2280	▲ 8 × 20	12	2220
1800	182	10 × 12.5	18	1760	○ 8 × 20	12	2220	● 10 × 20	10	2900
2200	222	10 × 15	20	1700	10 × 16	11	2280	10 × 20	10	2900
2700	272	10 × 16	11	2280	10 × 16	11	2280	10 × 20	10	2900
3300	332	▲ 8 × 20	12	2220	▲ 8 × 20	12	2220	10 × 20	10	2900
4700	472	● 10 × 16	11	2280	10 × 16	11	2280	10 × 20	10	2900
5600	562	10 × 20	10	2900	10 × 20	10	2900	10 × 25	9	3190
8200	822	10 × 20	10	2900	10 × 20	10	2900	▲ 12.5 × 20	9	3190
		10 × 25	9	3190	12.5 × 20	9	3190	12.5 × 20	9	3190
		▲ 12.5 × 20	9	3190	12.5 × 25	8	3370	▲ 12.5 × 25	8	3370
		12.5 × 20	9	3190	12.5 × 25	8	3370	12.5 × 25	8	3370
		12.5 × 25	8	3370	16 × 25	7	3610	16 × 25	7	3610
		16 × 25	7	3610						

▲ : In this case, [6] will be put at 12th digit of type numbering system.
● : In this case, [3] will be put at 12th digit of type numbering system.
○ : In this case, [9] will be put at 12th digit of type numbering system.

CAT.8100Y