

Surface Mount Type

Series: **FC** Type: **V**

FC High temperature Lead-Free reflow(suffix:A*)

Low impedance



■ Features

- Endurance : 105 °C 1000 h
- Low impedance (1/2 for HA series)
- Vibration-proof product is available upon request. ($\phi 8 \leq$)
- RoHS directive compliant


■ Specifications

Category Temp. Range	-40 °C to +105 °C						
Rated W.V. Range	6.3 V.DC to 35 V.DC						
Nominal Cap. Range	1 μ F to 1500 μ F						
Capacitance Tolerance	$\pm 20\%$ (120 Hz/+20 °C)						
DC Leakage Current	$I \leq 0.01 CV$ or 3 (μ A) After 2 minutes (Whichever is greater)						
tan δ	Please see the attached High temperature lead-free reflow products list.						
Characteristics at Low Temperature	W.V. (V)	6.3	10	16	25	35	(Impedance ratio at 120 Hz)
	Z(-25 °C) / Z(+20 °C)	2	2	2	2	2	
	Z(-40 °C) / Z(+20 °C)	3	3	3	3	3	
Endurance	After applying rated working voltage for 1000 hours at +105 °C ± 2 °C and then being stabilized at +20 °C, Capacitors shall meet the following limits.						
	Capacitance change	$\pm 20\%$ of initial measured value					
	tan δ	$\leq 200\%$ of initial specified value					
	DC leakage current	\leq initial specified value					
Shelf Life	After storage for 1000 hours at +105 °C ± 2 °C with no voltage applied and then being stabilized at +20 °C, capacitors shall meet the limits specified in Endurance.(With voltage treatment)						
	After reflow soldering and then being stabilized at +20 °C, capacitors shall meet the following limits.						
Resistance to Soldering Heat	Capacitance change $\pm 10\%$ of initial measured value						
	tan δ \leq initial specified value						
	DC leakage current \leq initial specified value						

■ Marking

Example: 6.3 V 22 μ F


Marking color : BLACK

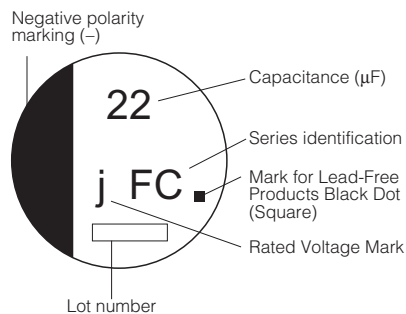

Rated Voltage Mark

j	6.3 V
A	10 V
C	16 V
E	25 V
V	35 V

■ Dimensions in mm (not to scale)

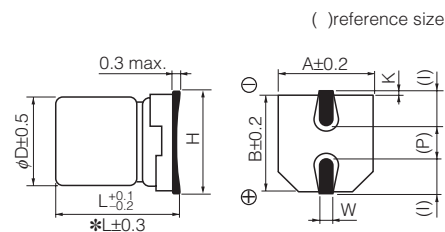

Size code	D	L	A,B	H max.	I	W	P	K
B	4.0	5.4	4.3	5.5	1.8	0.65 ± 0.1	1.0	0.35-0.20 to +0.15
C	5.0	5.4	5.3	6.5	2.2	0.65 ± 0.1	1.5	0.35-0.20 to +0.15
D	6.3	5.4	6.6	7.8	2.6	0.65 ± 0.1	1.8	0.35-0.20 to +0.15
E*	8.0	6.2	8.3	9.5	3.4	0.65 ± 0.1	2.2	0.35-0.20 to +0.15
F*	8.0	10.2	8.3	10.0	3.4	0.90 ± 0.2	3.1	0.70 ± 0.2
G*	10.0	10.2	10.3	12.0	3.5	0.90 ± 0.2	4.6	0.70 ± 0.2

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use. Should a safety concern arise regarding this product, please be sure to contact us immediately.

High temperature Lead-Free reflow Products

Endurance : 105 °C 1000 h

W.V.	Cap. (±20 %)	Case size			Specification			Part No. (RoHS:compliant)	Reflow	Min. Packaging Q'ty
		Dia.	Length	Size Code	Ripple Current (100 kHz) (+105°C) (mA r.m.s.)	tan δ (120 Hz) (+20 °C)	Impedance (100 kHz) (+20 °C) (Ω)			Taping (pcs)
(V)	(μF)	(mm)	(mm)							
6.3	22	4	5.4	B	60	0.26	3.00	EEEFC0J220AR	(5)	2000
	47	5	5.4	C	95	0.26	1.80	EEEFC0J470AR	(5)	1000
	68	6.3	5.4	D	140	0.26	1.00	EEEFC0J680AP	(5)	1000
	100	6.3	5.4	D	140	0.26	1.00	EEEFC0J101AP	(5)	1000
	220	8	6.2	E	230	0.26	0.40	EEEFC0J221AP	(6)	1000
	330	8	10.2	F	450	0.26	0.30	EEEFC0J331AP	(6)	500
	1000	10	10.2	G	670	0.26	0.15	EEEFC0J102AP	(6)	500
10	1500	10	10.2	G	670	0.26	0.15	EEEFC0J152AP	(6)	500
	33	5	5.4	C	95	0.19	1.80	EEEFC1A330AR	(5)	1000
	100	8	6.2	E	230	0.19	0.40	EEEFC1A101AP	(6)	1000
	150	8	6.2	E	230	0.19	0.40	EEEFC1A151AP	(6)	1000
	220	8	10.2	F	450	0.19	0.30	EEEFC1A221AP	(6)	500
	470	10	10.2	G	670	0.19	0.15	EEEFC1A471AP	(6)	500
16	1000	10	10.2	G	670	0.19	0.15	EEEFC1A102AP	(6)	500
	10	4	5.4	B	60	0.16	3.00	EEEFC1C100AR	(5)	2000
	22	5	5.4	C	95	0.16	1.80	EEEFC1C220AR	(5)	1000
	47	6.3	5.4	D	140	0.16	1.00	EEEFC1C470AP	(5)	1000
	68	8	6.2	E	230	0.16	0.40	EEEFC1C680AP	(6)	1000
	100	8	6.2	E	230	0.16	0.40	EEEFC1C101AP	(6)	1000
	220	10	10.2	G	670	0.16	0.15	EEEFC1C221AP	(6)	500
	330	10	10.2	G	670	0.16	0.15	EEEFC1C331AP	(6)	500
	470	10	10.2	G	670	0.16	0.15	EEEFC1C471AP	(6)	500
25	680	10	10.2	G	670	0.16	0.15	EEEFC1C681AP	(6)	500
	6.8	4	5.4	B	60	0.14	3.00	EEEFC1E6R8AR	(5)	2000
	22	6.3	5.4	D	140	0.14	1.00	EEEFC1E220AP	(5)	1000
	33	6.3	5.4	D	140	0.14	1.00	EEEFC1E330AP	(5)	1000
	47	8	6.2	E	230	0.14	0.40	EEEFC1E470AP	(6)	1000
	68	8	10.2	F	450	0.14	0.30	EEEFC1E680AP	(6)	500
	100	8	10.2	F	450	0.14	0.30	EEEFC1E101AP	(6)	500
	220	10	10.2	G	670	0.14	0.15	EEEFC1E221AP	(6)	500
35	330	10	10.2	G	670	0.14	0.15	EEEFC1E331AP	(6)	500
	470	10	10.2	G	670	0.14	0.15	EEEFC1E471AP	(6)	500
	1	4	5.4	B	60	0.12	3.00	EEEFC1V1R0AR	(5)	2000
	2.2	4	5.4	B	60	0.12	3.00	EEEFC1V2R2AR	(5)	2000
	3.3	4	5.4	B	60	0.12	3.00	EEEFC1V3R3AR	(5)	2000
	4.7	4	5.4	B	60	0.12	3.00	EEEFC1V4R7AR	(5)	2000
	6.8	5	5.4	C	95	0.12	1.80	EEEFC1V6R8AR	(5)	1000
	10	5	5.4	C	95	0.12	1.80	EEEFC1V100AR	(5)	1000
	22	6.3	5.4	D	140	0.12	1.00	EEEFC1V220AP	(5)	1000
	33	8	6.2	E	230	0.12	0.40	EEEFC1V330AP	(6)	1000
35	47	8	6.2	E	230	0.12	0.40	EEEFC1V470AP	(6)	1000
	100	10	10.2	G	670	0.12	0.15	EEEFC1V101AP	(6)	500
	220	10	10.2	G	670	0.12	0.15	EEEFC1V221AP	(6)	500
	330	10	10.2	G	670	0.12	0.15	EEEFC1V331AP	(6)	500

The taping dimensions are explained on p.177 of our Catalog.
Please use it as a reference guide.
Reflow Profile (Fig-1 to Fig-11) listed on p.175 of our Catalog.

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use.
Should a safety concern arise regarding this product, please be sure to contact us immediately.