


WP 5.5mmL Chip Type, Bi-Polarized
series




- Designed for surface mounting on high density PC board.
- Applicable to automatic mounting machine fed with carrier tape.
- Compliant to the RoHS directive (2002/95/EC).



Specifications

Item	Performance Characteristics								
Category Temperature Range	-40 to +85°C								
Rated Voltage Range	6.3 to 50V								
Rated Capacitance Range	0.1 to 100μF								
Capacitance Tolerance	±20% at 120Hz, 20°C								
Leakage Current	After 2 minutes' application of rated voltage, leakage current is not more than 0.05CV or 10 (μA) ,whichever is greater.								
Tangent of loss angle (tan δ)	Measurement frequency : 120Hz, Temperature : 20°C								
	Rated voltage (V)	6.3	10	16	25	35	50		
	tan δ (MAX.)	0.24	0.20	0.17	0.17	0.15	0.15		
Stability at Low Temperature	Measurement frequency : 120Hz								
	Rated voltage (V)		6.3	10	16	25	35	50	
	Impedance ratio	Z-25°C / Z+20°C	4	3	2	2	2	2	
	ZT / Z20 (MAX.)	Z-40°C / Z+20°C	8	6	4	4	3	3	
Endurance	The specifications listed at right shall be met when the capacitors are restored to 20°C after the rated voltage is applied for 1000 hours at 85°C with the polarity inverted every 250 hours.						Capacitance change		Within ±20% of the initial capacitance value
							tan δ		200% or less than the initial specified value
							Leakage current		Less than or equal to the initial specified value
Shelf Life	After storing the capacitors under no load at 85°C for 1000 hours and then performing voltage treatment based on JIS C 5101-4 clause 4.1 at 20°C, they shall meet the specified values for the endurance characteristics listed above.								
Resistance to soldering heat	The capacitors are kept on a hot plate for 30 seconds, which is maintained at 250°C. The capacitors shall meet the characteristic requirements listed at right when they are removed from the plate and restored to 20°C.						Capacitance change		Within ±10% of the initial capacitance value
							tan δ		Less than or equal to the initial specified value
							Leakage current		Less than or equal to the initial specified value
Marking	Black print on the case top.								

Chip Type

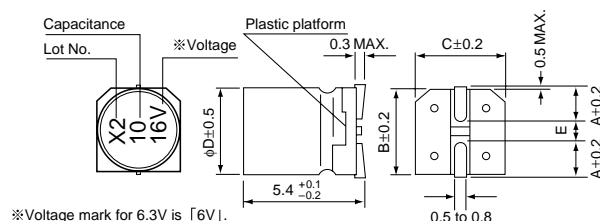

φ	4	5	6.3	8
A	1.8	2.1	2.4	3.3
B	4.3	5.3	6.6	8.3
C	4.3	5.3	6.6	8.3
E	1.0	1.3	2.2	2.3

Type numbering system (Example : 16V 10μF)

1	2	3	4	5	6	7	8	9	10	11	12	13	14
U	W	P	1	C	1	0	0	M	C	L	1	G	B
Taping code													
Configuration													
Capacitance tolerance (±20%)													
Rated capacitance (10μF)													
Rated voltage (16V)													
Series name													
Type													

Dimensions

Cap. (μF)	V	6.3	10	16	25	35	50
0.1	0R1						4 1.0
0.22	R22						4 2.0
0.33	R33						4 2.8
0.47	R47						4 4.0
1	010						4 8.4
2.2	2R2					4 8.4	5 13
3.3	3R3				5 12	5 16	5 17
4.7	4R7			4 12	5 16	5 18	6.3 20
10	100		4 17	5 23	6.3 27	6.3 29	8 36
22	220	5 28	6.3 33	6.3 37	8 50	8 54	
33	330	6.3 37	6.3 41	6.3 49	8 61		
47	470	6.3 45	8 61	8 75			
100	101	8 82					Rated ripple

Rated ripple current (mA rms) at 85°C 120Hz

Frequency coefficient of rated ripple current

Frequency	50 Hz	120 Hz	300 Hz	1 kHz	10 kHz or more
Coefficient	0.70	1.00	1.17	1.36	1.50

- Taping specifications are given in page 23.
- Recommended land size, soldering by reflow are given in page 18, 19.
- Please select UN(p.104) series if high C/V products are required.
- Please refer to page 3 for the minimum order quantity.

CAT.8100Y