


ALUMINUM ELECTROLYTIC CAPACITORS

nichicon



Chip Type, Long Life Assurance



- Chip type with load life of 5000 hours at +105°C.
- Designed for surface mounting on high density PC board.
- Compliant to the RoHS directive (2002/95/EC).




■ Specifications


Item	Performance Characteristics																											
Category Temperature Range	-40 to +105°C																											
Rated Voltage Range	6.3 to 50V																											
Rated Capacitance Range	0.1 to 1000μF																											
Capacitance Tolerance	±20% at 120Hz, 20°C																											
Leakage Current	After 2 minutes' application of rated voltage, leakage current is not more than 0.01 CV or 3 (μA), Max																											
Tangent of loss angle (tan δ)	<table border="1"> <thead> <tr> <th>Rated voltage (V)</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> </tr> </thead> <tbody> <tr> <td>tan δ (MAX.)</td> <td>0.32</td> <td>0.24</td> <td>0.20</td> <td>0.16</td> <td>0.13</td> <td>0.12</td> </tr> </tbody> </table>							Rated voltage (V)	6.3	10	16	25	35	50	tan δ (MAX.)	0.32	0.24	0.20	0.16	0.13	0.12							
Rated voltage (V)	6.3	10	16	25	35	50																						
tan δ (MAX.)	0.32	0.24	0.20	0.16	0.13	0.12																						
Stability at Low Temperature	<table border="1"> <thead> <tr> <th>Rated voltage (V)</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> </tr> </thead> <tbody> <tr> <td>Impedance ratio Z-25°C / Z+20°C</td> <td>4</td> <td>3</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> </tr> <tr> <td>ZT / Z20 (MAX.) Z-40°C / Z+20°C</td> <td>10</td> <td>7</td> <td>5</td> <td>3</td> <td>3</td> <td>3</td> </tr> </tbody> </table>							Rated voltage (V)	6.3	10	16	25	35	50	Impedance ratio Z-25°C / Z+20°C	4	3	2	2	2	2	ZT / Z20 (MAX.) Z-40°C / Z+20°C	10	7	5	3	3	3
Rated voltage (V)	6.3	10	16	25	35	50																						
Impedance ratio Z-25°C / Z+20°C	4	3	2	2	2	2																						
ZT / Z20 (MAX.) Z-40°C / Z+20°C	10	7	5	3	3	3																						
Endurance	<p>The specifications listed at right shall be met when the capacitors are restored to 20°C after the rated voltage is applied for 5000 hours at 105°C.</p> <table border="1"> <thead> <tr> <th>Capacitance change</th> <th>Within ±30% of the initial capacitance value</th> </tr> </thead> <tbody> <tr> <td>tan δ</td> <td>300% or less than the initial specified value</td> </tr> <tr> <td>Leakage current</td> <td>Less than or equal to the initial specified value</td> </tr> </tbody> </table>							Capacitance change	Within ±30% of the initial capacitance value	tan δ	300% or less than the initial specified value	Leakage current	Less than or equal to the initial specified value															
Capacitance change	Within ±30% of the initial capacitance value																											
tan δ	300% or less than the initial specified value																											
Leakage current	Less than or equal to the initial specified value																											
Shelf Life	After storing the capacitors under no load at 105°C for 1000 hours and then performing voltage treatment based on JIS C 5101-4 clause 4.1 at 20°C, they shall meet the specified values for the endurance characteristics listed above.																											
Resistance to soldering heat	The capacitors are kept on a hot plate for 30 seconds, which is maintained at 250°C. The capacitors shall meet the characteristic requirements listed at right when they are removed from the plate and restored to 20°C.																											
Marking	Black print on the case top.																											

■ Chip Type

(φ4 to φ6.3)

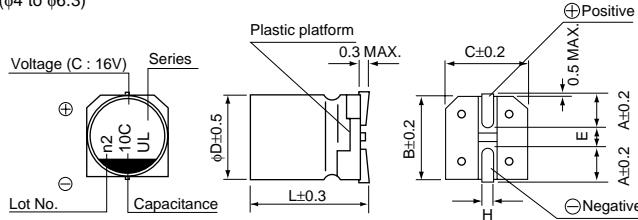


(φ8 to φ10)

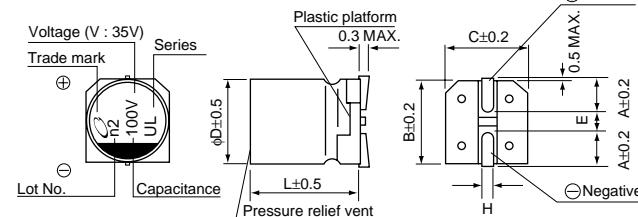

Voltage

V	6.3	10	16	25	35	50
Code	j	A	C	E	V	H

Type numbering system (Example : 16V 100μF)

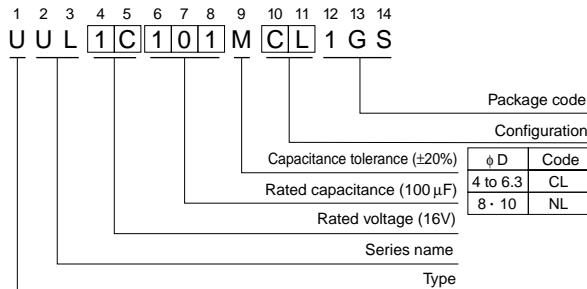

Φ D × L	4 × 5.8	5 × 5.8	6.3 × 5.8	6.3 × 7.7	8 × 10	10 × 10
A	1.8	2.1	2.4	2.4	2.9	3.2
B	4.3	5.3	6.6	6.6	8.3	10.3
C	4.3	5.3	6.6	6.6	8.3	10.3
E	1.0	1.3	2.2	2.2	3.1	4.5
L	5.8	5.8	5.8	7.7	10	10
H	0.5 to 0.8	0.5 to 0.8	0.5 to 0.8	0.5 to 0.8	0.8 to 1.1	0.8 to 1.1

● Dimension table in next page.

CAT.8100Y

■ Dimensions

Cap. (μ F)	V	6.3		10		16		25		35		50	
		Code	0J	Code	1A	Code	1C	Code	1E	Code	1V	Code	1H
0.1	0R1											4×5.8	1.0
0.22	R22											4×5.8	2.6
0.33	R33											4×5.8	3.2
0.47	R47											4×5.8	3.8
1	010											4×5.8	6.2
2.2	2R2											4×5.8	11
3.3	3R3											4×5.8	14
4.7	4R7									4×5.8	15	5×5.8	19
10	100					4×5.8	18	5×5.8	25	5×5.8	25	6.3×5.8	30
22	220			5×5.8	30	5×5.8	30	6.3×5.8	42	6.3×5.8	42	6.3×7.7	49
33	330	5×5.8	35	5×5.8	35	6.3×5.8	48	6.3×5.8	48	6.3×7.7	57	8×10	77
47	470	5×5.8	36	6.3×5.8	50	6.3×5.8	50	6.3×7.7	63	8×10	92	8×10	92
100	101	6.3×5.8	60	6.3×7.7	81	6.3×7.7	81	8×10	116	10×10	151	10×10	151
220	221	6.3×7.7	101	8×10	141	10×10	216	10×10	216	10×10	216		
330	331	8×10	160	10×10	238	10×10	238	10×10	238				
470	471	10×10	254	10×10	254	10×10	254						
1000	102	10×10	313									Case size ΦD×L(mm)	Rated ripple

Rated ripple current (mA rms) at 105°C 120Hz

● Frequency coefficient of rated ripple current

Frequency	50 Hz	120 Hz	300 Hz	1 kHz	10 kHz or more
Coefficient	0.70	1.00	1.17	1.36	1.50

- Taping specifications are given in page 23.
- Recommended land size, soldering by reflow are given in page 18, 19.
- Please refer to page 3 for the minimum order quantity.