

# Multilayer Ceramic Chip Capacitors

For automobile

Guaranteed at high temperature

## CGA series

**Type:**            **CGA2(C1005[EIA CC0402])**  
                         **CGA3(C1608[EIA CC0603])**  
                         **CGA4(C2012[EIA CC0805])**  
                         **CGA5(C3216[EIA CC1206])**  
                         **CGA6(C3225[EIA CC1210])**

Issue date:        February 2009

- All specifications are subject to change without notice.
- Conformity to RoHS Directive: This means that, in conformity with EU Directive 2002/95/EC, lead, cadmium, mercury, hexavalent chromium, and specific bromine-based flame retardants, PBB and PBDE, have not been used, except for exempted applications.

## REMINDERS

Please read this before using the product.

### SAFETY REMINDERS

#### REMINDERS

1. If you intend to use a product listed in this catalog for a purpose that may cause loss of life or other damage, you must contact our company's sales window.
2. We may modify products or discontinue production of a product listed in this catalog without prior notification.
3. We provide "Delivery Specification" that explain precautions for the specifications and safety of each product listed in this catalog. We strongly recommend that you exchange these delivery specifications with customers that use one of these products.
4. If you plan to export a product listed in this catalog, keep in mind that it may be a restricted item according to the "Foreign Exchange and Foreign Trade Control Law". In such cases, it is necessary to acquire export permission in harmony with this law.
5. Any reproduction or transferring of the contents of this catalog is prohibited without prior permission from our company.
6. We are not responsible for problems that occur related to the intellectual property rights or other rights of our company or a third party when you use a product listed in this catalog. We do not grant license of these rights.
7. This catalog only applies to products purchased through our company or one of our company's official agencies. This catalog does not apply to products that are purchased through other third parties.
8. The descriptions in this catalog apply as of February 2009.

# Guaranteed at High Temperature Multilayer Ceramic Chip Capacitors for Automobile CGA Series

Conformity to RoHS Directive

## FEATURES

- The CGA series consists of products that are used for the power train, safety equipment, etc. of a vehicle.
- Even in a high-temperature range (up to +150°C), the capacitor has a stable temperature characteristic of capacitance of  $\pm 15\%$ .
- In a quasi-high-temperature range (up to +125°C), the capacitor has a high-definition performance with its temperature characteristic of capacitance being  $\pm 7.5\%$ .

## PRODUCT IDENTIFICATION

CGA 5 L 2 X8R 1E 105 K  
 (1) (2) (3) (4) (5) (6) (7) (8)

### (1) Series name

### (2) Dimensions

2	1005(1.0×0.5mm)
3	1608(1.6×0.8mm)
4	2012(2.0×1.25mm)
5	3216(3.2×1.6mm)
6	3225(3.2×2.5mm)

### (3) Thickness T

B	0.50mm
E	0.80mm
F	0.85mm
H	1.15mm
J	1.25mm
L	1.60mm
M	2.00mm
P	2.50mm

### (4) Voltage conditions at the time of high temperature loading

(Shown below are guaranteed applied voltages in a high temperature load test. [Maximum operating temperature/1000h])

2	Product with the rated voltage×2 guaranteed
---	---

### (5) Capacitance Temperature characteristics

Class 2 (Temperature stable and general purpose)

Temperature characteristics	Capacitance change	Temperature range
X8R	$\pm 15\%$	-55 to +150°C

### (6) Product with the rated voltage E<sub>dc</sub>

1E	25V
1H	50V
2A	100V

### (7) Nominal capacitance

The capacitance is expressed in three digit codes and in units of pico farads (pF).

The first and second digits identify the first and second significant figures of the capacitance.

151	150pF
104	100,000pF(0.1μF)
105	1,000,000pF(1μF)

### (8) Capacitance Tolerance


K	+10%
---	------

- Conformity to RoHS Directive: This means that, in conformity with EU Directive 2002/95/EC, lead, cadmium, mercury, hexavalent chromium, and specific bromine-based flame retardants, PBB and PBDE, have not been used, except for exempted applications.

- All specifications are subject to change without notice. Please read the precautions before using this catalog.

## CGA2(C1005[EIA: CC0402]) Type

### SHAPES AND DIMENSIONS

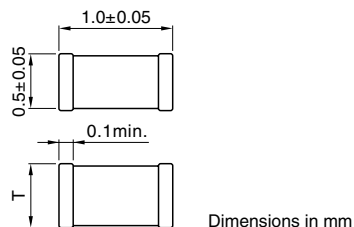

### CAPACITANCE RANGES: CLASS 2

#### TEMPERATURE CHARACTERISTICS: X8R(±15%)

RATED VOLTAGE Edc: 50V


Capacitance (pF)	Tolerance	Thickness T (mm)	Voltage conditions at the time of high temperature loading	Part No.
150	±10%	0.5±0.05	2	CGA2B2X8R1H151K
220	±10%	0.5±0.05	2	CGA2B2X8R1H221K
330	±10%	0.5±0.05	2	CGA2B2X8R1H331K
470	±10%	0.5±0.05	2	CGA2B2X8R1H471K
680	±10%	0.5±0.05	2	CGA2B2X8R1H681K
1000	±10%	0.5±0.05	2	CGA2B2X8R1H102K
1500	±10%	0.5±0.05	2	CGA2B2X8R1H152K
2,200	±10%	0.5±0.05	2	CGA2B2X8R1H222K
3,300	±10%	0.5±0.05	2	CGA2B2X8R1H332K
4,700	±10%	0.5±0.05	2	CGA2B2X8R1H472K

RATED VOLTAGE Edc: 25V

Capacitance (pF)	Tolerance	Thickness T (mm)	Voltage conditions at the time of high temperature loading	Part No.
6,800	±10%	0.5±0.05	2	CGA2B2X8R1E682K
10,000	±10%	0.5±0.05	2	CGA2B2X8R1E103K

## CGA3(C1608[EIA: CC0603]) Type

### SHAPES AND DIMENSIONS

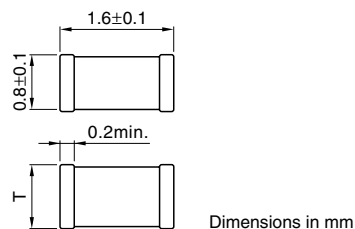

### CAPACITANCE RANGES: CLASS 2

#### TEMPERATURE CHARACTERISTICS: X8R(±15%)

RATED VOLTAGE E<sub>dc</sub>: 100V

Capacitance (pF)	Tolerance	Thickness T (mm)	Voltage conditions at the time of high temperature loading	Part No.
1,000	±10%	0.8±0.1	2	CGA3E2X8R2A102K
1,500	±10%	0.8±0.1	2	CGA3E2X8R2A152K
2,200	±10%	0.8±0.1	2	CGA3E2X8R2A222K
3,300	±10%	0.8±0.1	2	CGA3E2X8R2A332K
4,700	±10%	0.8±0.1	2	CGA3E2X8R2A472K
6,800	±10%	0.8±0.1	2	CGA3E2X8R2A682K
10,000	±10%	0.8±0.1	2	CGA3E2X8R2A103K
15,000	±10%	0.8±0.1	2	CGA3E2X8R2A153K

RATED VOLTAGE E<sub>dc</sub>: 50V


Capacitance (pF)	Tolerance	Thickness T (mm)	Voltage conditions at the time of high temperature loading	Part No.
1,000	±10%	0.8±0.1	2	CGA3E2X8R1H102K
1,500	±10%	0.8±0.1	2	CGA3E2X8R1H152K
2,200	±10%	0.8±0.1	2	CGA3E2X8R1H222K
3,300	±10%	0.8±0.1	2	CGA3E2X8R1H332K
4,700	±10%	0.8±0.1	2	CGA3E2X8R1H472K
6,800	±10%	0.8±0.1	2	CGA3E2X8R1H682K
10,000	±10%	0.8±0.1	2	CGA3E2X8R1H103K
15,000	±10%	0.8±0.1	2	CGA3E2X8R1H153K
22,000	±10%	0.8±0.1	2	CGA3E2X8R1H223K
33,000	±10%	0.8±0.1	2	CGA3E2X8R1H333K
47,000	±10%	0.8±0.1	2	CGA3E2X8R1H473K

RATED VOLTAGE E<sub>dc</sub>: 25V

Capacitance (pF)	Tolerance	Thickness T (mm)	Voltage conditions at the time of high temperature loading	Part No.
68,000	±10%	0.8±0.1	2	CGA3E2X8R1E683K
100,000	±10%	0.8±0.1	2	CGA3E2X8R1E104K

## CGA4(C2012[EIA: CC0805]) Type

### SHAPES AND DIMENSIONS



Dimensions in mm



### CAPACITANCE RANGES: CLASS 2

#### TEMPERATURE CHARACTERISTICS: X8R(±15%)

RATED VOLTAGE Edc: 100V

Capacitance (pF)	Tolerance	Thickness T (mm)	Voltage conditions at the time of high temperature loading	Part No.
22,000	±10%	1.25±0.20	2	CGA4J2X8R2A223K

RATED VOLTAGE Edc: 50V


Capacitance (pF)	Tolerance	Thickness T (mm)	Voltage conditions at the time of high temperature loading	Part No.
68,000	±10%	1.25±0.20	2	CGA4J2X8R1H683K
100,000	±10%	1.25±0.20	2	CGA4J2X8R1H104K

RATED VOLTAGE Edc: 25V

Capacitance (pF)	Tolerance	Thickness T (mm)	Voltage conditions at the time of high temperature loading	Part No.
150,000	±10%	0.85±0.15	2	CGA4F2X8R1E154K
220,000	±10%	1.25±0.20	2	CGA4J2X8R1E224K
330,000	±10%	1.25±0.20	2	CGA4J2X8R1E334K

## CGA5(C3216[EIA: CC1206]) Type

### SHAPES AND DIMENSIONS

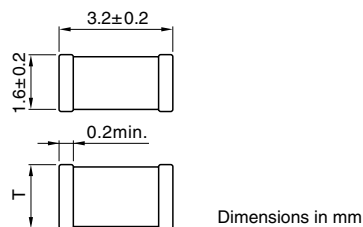

### CAPACITANCE RANGES: CLASS 2

#### TEMPERATURE CHARACTERISTICS: X8R(±15%)

RATED VOLTAGE Edc: 100V

Capacitance (pF)	Tolerance	Thickness T (mm)	Voltage conditions at the time of high temperature loading	Part No.
33,000	±10%	0.85±0.15	2	CGA5F2X8R2A333K
47,000	±10%	0.85±0.15	2	CGA5F2X8R2A473K
68,000	±10%	1.15±0.15	2	CGA5H2X8R2A683K
100,000	±10%	1.15±0.15	2	CGA5H2X8R2A104K
150,000	±10%	1.60±0.20	2	CGA5L2X8R2A154K

RATED VOLTAGE Edc: 50V


Capacitance (pF)	Tolerance	Thickness T (mm)	Voltage conditions at the time of high temperature loading	Part No.
150,000	±10%	0.85±0.15	2	CGA5F2X8R1H154K
220,000	±10%	1.15±0.15	2	CGA5H2X8R1H224K
330,000	±10%	1.60±0.20	2	CGA5L2X8R1H334K
470,000	±10%	1.60±0.20	2	CGA5L2X8R1H474K

RATED VOLTAGE Edc: 25V

Capacitance (pF)	Tolerance	Thickness T (mm)	Voltage conditions at the time of high temperature loading	Part No.
330,000	±10%	0.85±0.15	2	CGA5F2X8R1E334K
470,000	±10%	0.85±0.15	2	CGA5F2X8R1E474K
680,000	±10%	1.15±0.15	2	CGA5H2X8R1E684K
1,000,000	±10%	1.60±0.20	2	CGA5L2X8R1E105K

## CGA6(C3225[EIA: CC1210]) Type

### SHAPES AND DIMENSIONS



Dimensions in mm

### CAPACITANCE RANGES: CLASS 2

### TEMPERATURE CHARACTERISTICS: X8R(±15%)

RATED VOLTAGE E<sub>dc</sub>: 25V

Capacitance (pF)	Tolerance	Thickness T (mm)	Voltage conditions at the time of high temperature loading	Part No.
1,500,000	±10%	1.60±0.20	2	CGA6L2X8R1E155K
2,200,000	±10%	2.00±0.20	2	CGA6M2X8R1E225K
3,300,000	±10%	2.50±0.30	2	CGA6P2X8R1E335K