
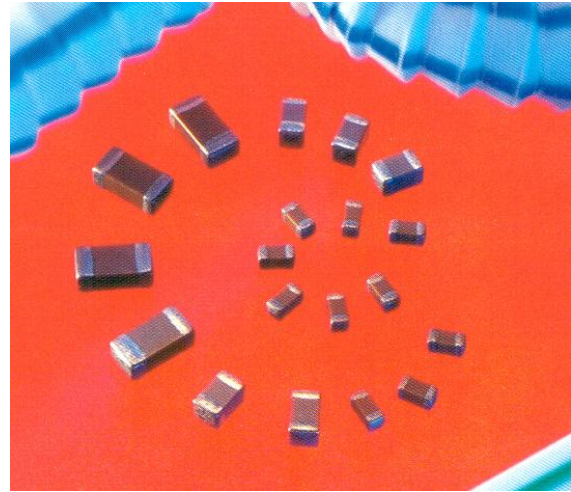


**PART NUMBER**  
**AU01ZC103KAG2A**

**MECHANICAL DIMENSION**

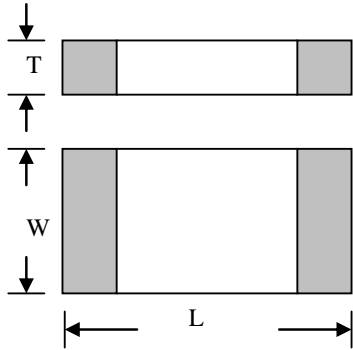

Dimension	Length (L)	Width (W)	Thickness (T)
mm	0.60±0.03	0.3 ±0.03	0.3 ±0.03
Inches	0.024±0.001	0.012 ±0.001	0.012 ±0.001

**PERFORMANCE CHARACTERISTICS**

Capacitance Value	10nF
Capacitance Tolerance	K=±10%
Dissipation Factor	5.0% MAX
Operating Temp. Range	-55°C to +125°C
Temperature Characteristic	± 15%
Voltage Ratings	10 VDC
Insulation Resistance	10,000 MΩ min. (charge device with rated voltage for 120secs @ room temp/humidity)
Test Frequency	1 kHz @ 1 Vrms±.2V
Termination	Nickel Barrier; Gold flash