


MI0805K400R-10

UNCONTROLLED DOCUMENT

PHYSICAL DIMENSIONS:



A	2.00 [.079]	+ 0.20 [.008]
B	1.25 [.049]	+ 0.20 [.008]
C	0.90 [.035]	+ 0.20 [.008]
D	0.51 [.020]	+ 0.25 [.010]

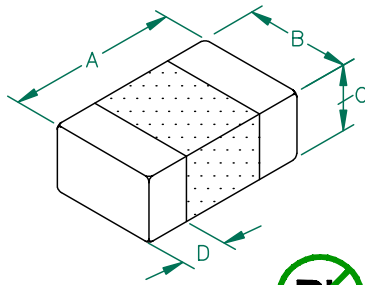


ELECTRICAL CHARACTERISTICS:			
Z @ 100MHz (Ω)	DCR (Ω)	Rated Current	
Nominal	40		
Minimum	30		
Maximum	50	0.050	1500 mA

NOTES: UNLESS OTHERWISE SPECIFIED


1. TAPED AND REELED per CURRENT EIA SPECIFICATIONS 7" REELS, 4000 PCS/REEL.
2. COMPONENTS SHOULD BE ADEQUATELY PREHEATED BEFORE SOLDERING.

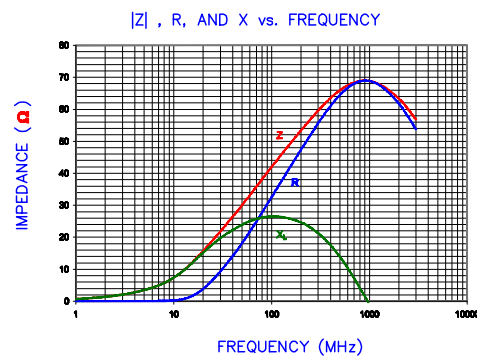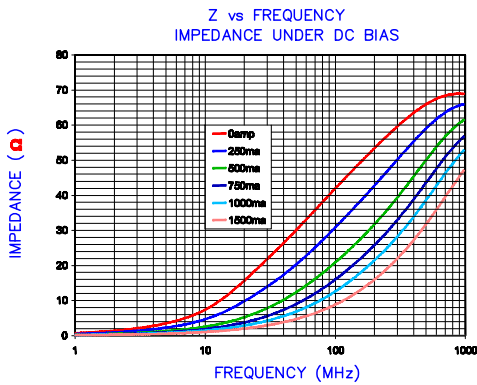

LAND PATTERNS FOR REFLOW SOLDERING

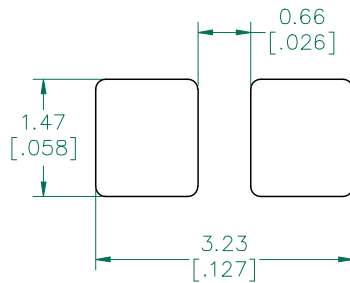

(For wave soldering, add 0.763 [.030] to this dimension.)

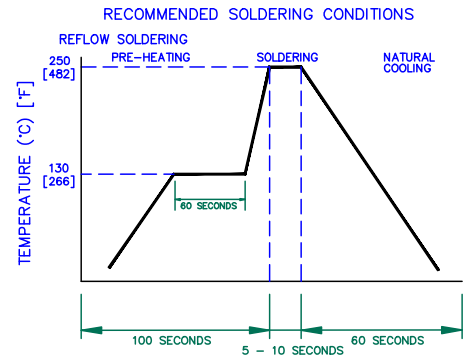

DIMENSIONS ARE IN mm [INCHES]		This print is the property of Laird Tech. and is loaned in confidence subject to return upon request and with the understanding that no copies shall be made without the written consent of Laird Tech. All rights to design or invention are reserved.	
PROJECT/PART NUMBER: MI0805K400R-10		REV: B	PART TYPE: CO-FIRE
DATE: 03/11/04		DRAWN BY: JRK	
SCALE: NTS		SHEET: 2 of 2	
REV: B	DESCRIPTION: UPDATE COMPANY LOGO & ADD ROHS	DATE: 08/06/08	INT: JRK
REV: A	DESCRIPTION: ORIGINAL DRAFT	DATE: 03/11/04	INT: JRK
REV: INT	DESCRIPTION: DESCRIPTION	DATE: 03/11/04	INT: MI0805K400R-10-B

