


HI1206N101R-10

PHYSICAL DIMENSIONS:

A	3.20 [.126]	+ 0.20 [.008]
B	1.60 [.063]	+ 0.20 [.008]
C	1.10 [.043]	+ 0.20 [.008]
D	0.51 [.020]	+ 0.25 [.010]


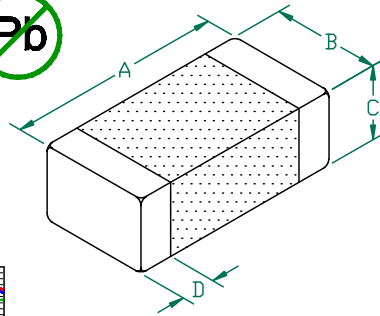


ELECTRICAL CHARACTERISTICS:

Z @ 100MHz (Ω)	DCR (Ω)	Rated Current
Nominal	100	
Minimum	75	
Maximum	125	3000 mA

NOTES: UNLESS OTHERWISE SPECIFIED


1. TERMINATION FINISH IS 100% TIN.
2. TAPED AND REELED per CURRENT EIA SPECIFICATIONS 7" REELS, 3,000 PCS/REEL, EMBOSSED PLASTIC TAPE.
3. COMPONENTS SHOULD BE ADEQUATELY PREHEATED BEFORE SOLDERING.

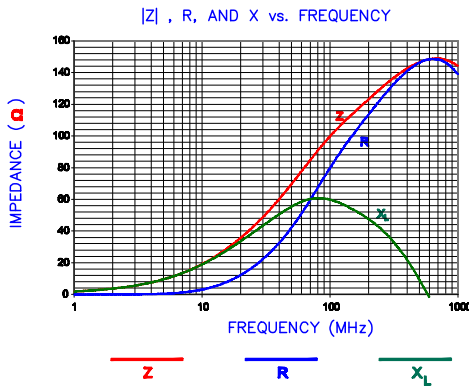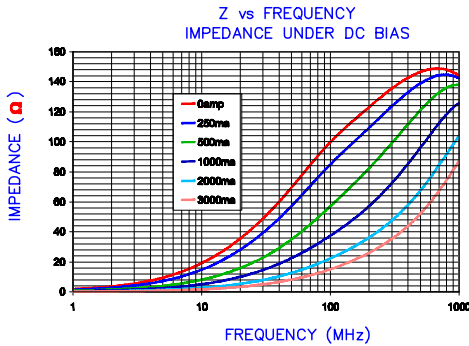


UNCONTROLLED DOCUMENT

OBSOLETE

LAND PATTERNS FOR REFLOW SOLDERING



RECOMMENDED SOLDERING CONDITIONS

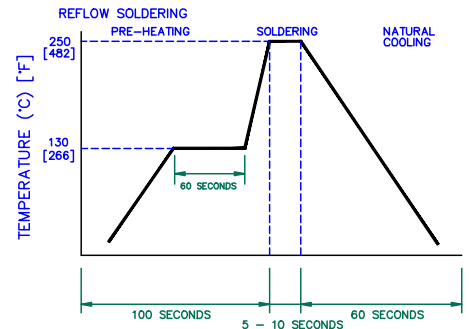

DIMENSIONS ARE IN mm [INCHES]

THIS DOCUMENT CONTAINS INFORMATION WHICH IS PROPRIETARY AND CONFIDENTIAL TO STEWARD. NO PRODUCTION OR PUBLICATION OF THIS DOCUMENT IN WHOLE OR IN PART SHALL BE MADE WITHOUT WRITTEN AUTHORIZATION FROM STEWARD.

Steward

D	ADD ROHS SYMBOL MODIFY NOTE 2	01/19/07	JRK	PROJECT/PART NUMBER:	HI1206N101R-10	REV	D	PART TYPE:	CO-FIRE	DRAWN BY:	BAC
C	ADD DC BIAS CURVE COR. LANDPATTERN	03/07/03	JRK	DATE:	01/12/01	SCALE:	NTS	SHEET:	2 of 2		
B	REMOVE NOTE 3	09/14/01	JRK	DATE:	01/12/01	SCALE:	NTS	SHEET:	2 of 2		
A	ORIGINAL DRAFT	01/12/01	BAC	DATE:	01/12/01	SCALE:	NTS	SHEET:	2 of 2		
REV	DESCRIPTION	DATE	INT	DATE:	01/12/01	SCALE:	NTS	SHEET:	2 of 2		

